

# Gain Stabilization of SiPMs

Uni Bergen:

G. Eigen, J. Zalieckas, E. van der Kraaij

FZU Prague:

J. Cvach, J. Kvasnicka, I. Polák



CALICE meeting, Argonne, 19/03/2014

# Introduction

- The gain of SiPMs depends both on bias voltage and on temperature
  - Gain decreases with temperature
  - Gain increases with bias voltage
- For stable operations, we need to keep gain constant
- In an analogue hadron calorimeter with millions of channels, this is a difficult task due to temperature variations
- Thus, it is desirable to adjust  $V_{\text{bias}}$  to compensate for  $T$  changes to keep the gain constant
- **Goal:** build a  $V_{\text{bias}}$  regulator to keep gain constant (<1%)
- First, we need to measure SiPM gain vs temperature and vs  $V_{\text{bias}}$ 
  - determine  $dV/dT$  to obtain constant gain
  - apply the compensation and demonstrate proof of principle
- This is work conducted in the framework of the EU project AIDA

# SiPM Test Setup




- We work in a climate chamber at CERN that is stable within  $0.2^{\circ}\text{C}$
- Use digital oscilloscope read out by PC, low voltage & bias voltage power supplies
- Use pulse generator for LED signal
- Blue LED shines on SiPM

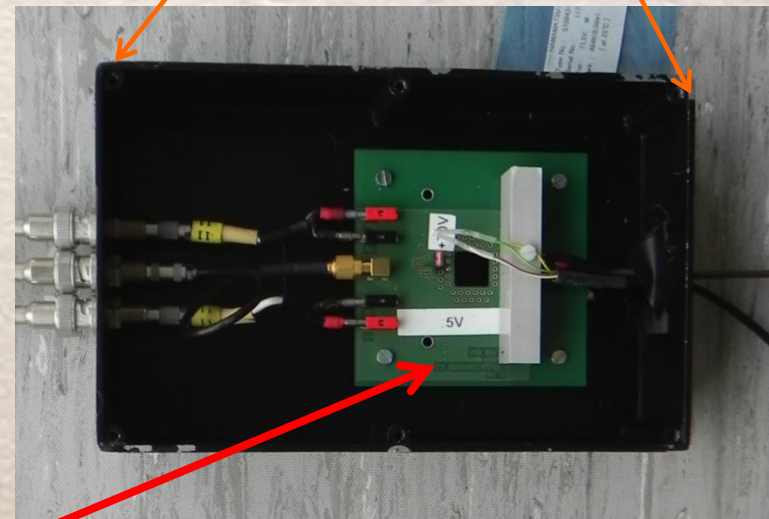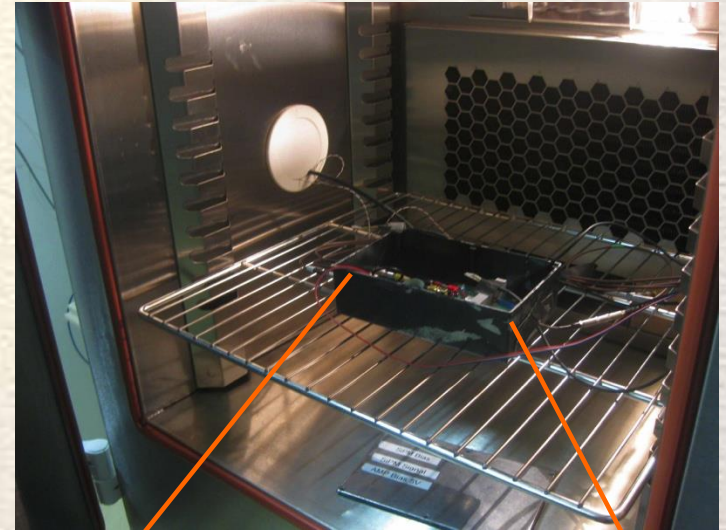

SiPM + preamp + T sensor + LED<sub>3</sub>

# Temperature Measurement

- Use 3 pt 1000 sensors
  - Near SiPM, inside and outside black box
- Use LM35 sensor for compensation feedback
- Vary T from 5°C to 40°C in 5°C steps except in 20°C - 30°C range (2°C steps)
  - $T_{\text{SiPM}} \sim T_{\text{SET}} + 0.4^\circ\text{C}$ ,
  - offset is same over entire range

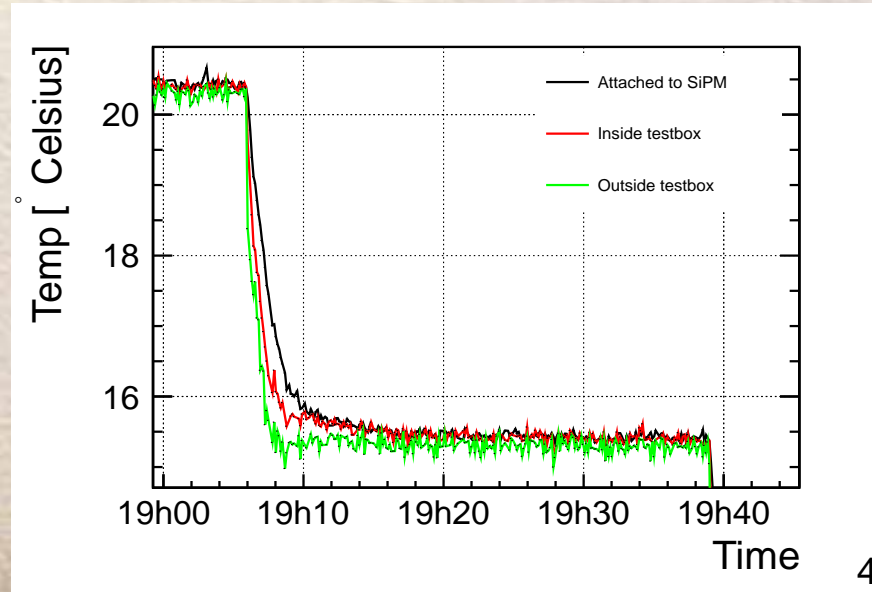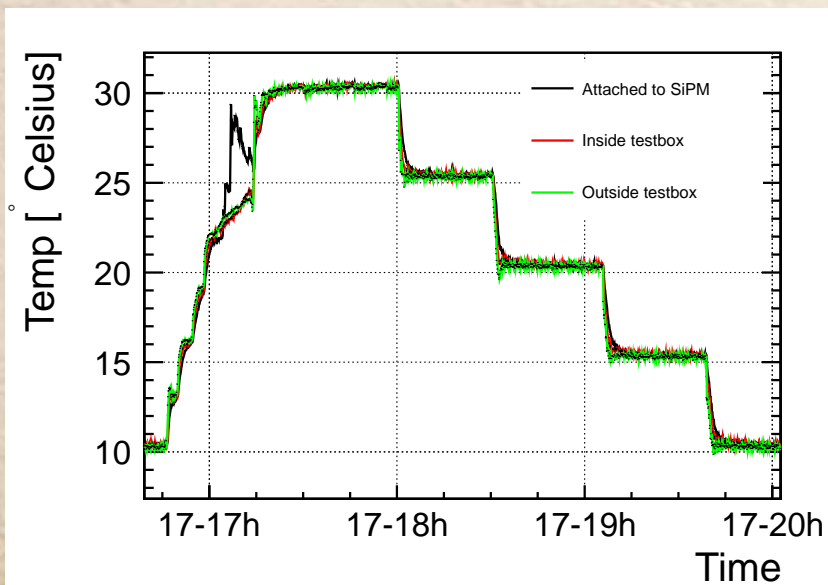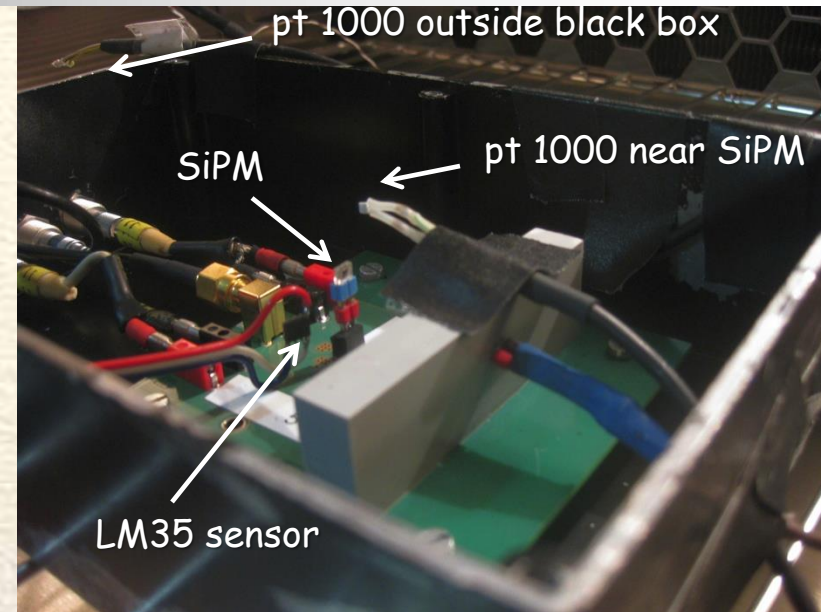

# SiPM Tested

● We measured the  $dG/dT$  &  $dG/dV$  dependence for 15 SiPMs from 3 manufacturers

● We tested the  $V_{bias}$  adjustment on 4 SiPMs:

- CPTA 857
- CPTA 1677
- KETEK W 12
- MPPC 50um 11759
- MPPC 20um "B"


● Note that CPTA sensors were attached to

3x3 cm<sup>2</sup> scintillator tiles while the other sensors were directly illuminated by blue LED

Manufacturer and Type #	Sensitive area [mm <sup>2</sup> ]	Pixel pitch [μm]	#pixels	Typical $V_{bias}$ [V]	Typical $G$ [ $\times 10^5$ ]	Serial #
Hamamatsu						
→ S10943-8584(X)	1 × 1	50	400	71.69	7.49	11759
S10943-8584(X)	1 × 1	50	400	71.57	7.49	11766
S10943-8584(X)	1 × 1	50	400	71.50	7.48	11770
S10943-8584(X)	1 × 1	50	400	71.33	7.48	11771
Sample A	1 × 1	20	2500	66.7	2.3	A1
Sample B	1 × 1	20	2500	73.3	2.3	B1
Sample A	1 × 1	15	4440	67.2	2.0	A2
Sample B	1 × 1	15	4440	74.0	2.0	B2
CPTA						
→	1 × 1	40	796	33.4	7.1	857
	1 × 1	40	796	33.1	6.3	922
	1 × 1	40	796	33.3	6.3	975
	1 × 1	40	796	33.1	7.0	1065
→	1 × 1	40	796	33.3	14.6	1677
KETEK						
MP15 V6 ?	2(1.2 × 1.2)	15?	?	-28	?	W8
→ MP20 V4 ?	3 × 3	20?	?	-28	?	W12


# Layout of the Adaptive Power Regulator

- Ivo designed  $V_{\text{bias}}$  regulator that operates in 10 V to 80 V region plus T correction effects
- Temperature slope:  $<1$  to  $100$  mV/K, both positive and negative
- First design of test board done summer 2013
- Tested in CERN Sep 2013, results shown in this presentation

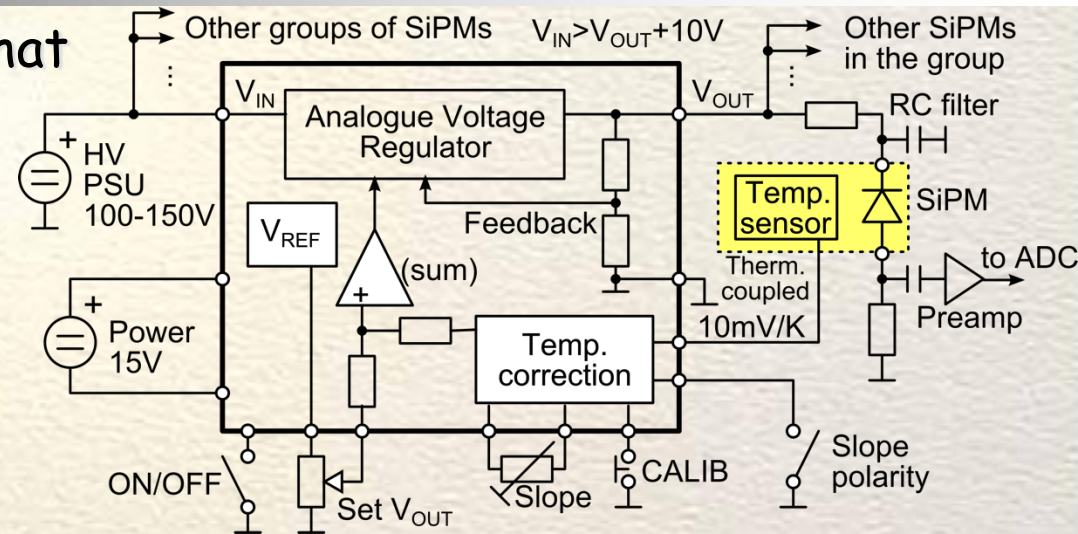


Analogue voltage regulator

Voltage reference

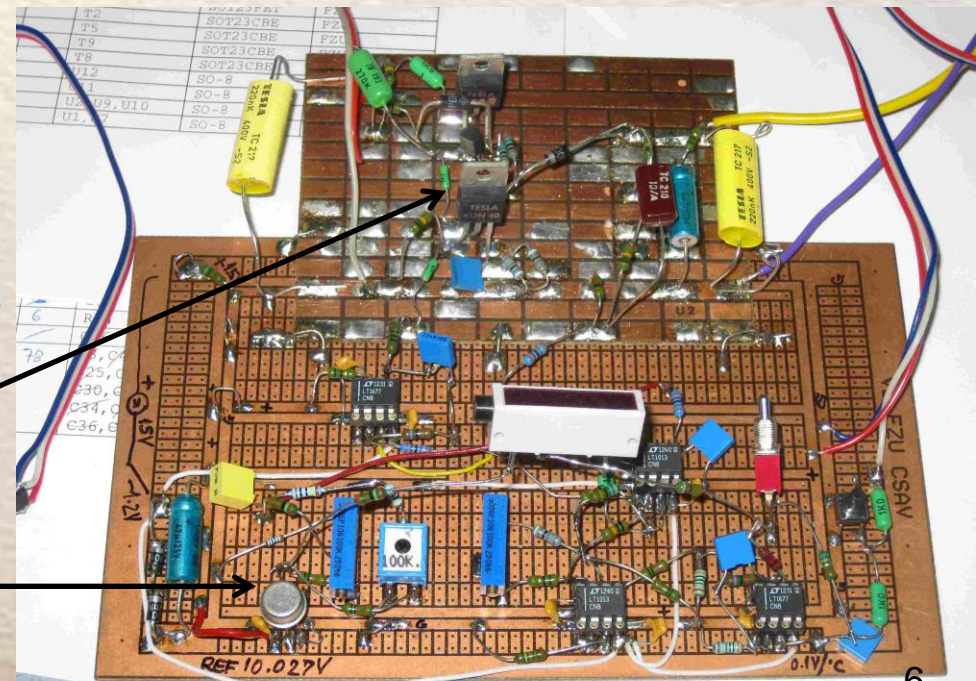

# Gain Determination (being updated)




- Determine gain by fitting Gaussian functions to peaks of single pe spectra
- Define gain as
  - Distance between 1 pe & 2 pe peaks (MPPCs)
  - Distance between pedestal & 1 pe peak (CPTA, KETEK)
- Define the error on the gain as the errors of the two fitted Gaussian mean values added in quadrature
- Quality cut: Require gain extracted from Gaussian peaks and that from multikernel peaks not to differ by more than 20% (a sign of a bad fit)

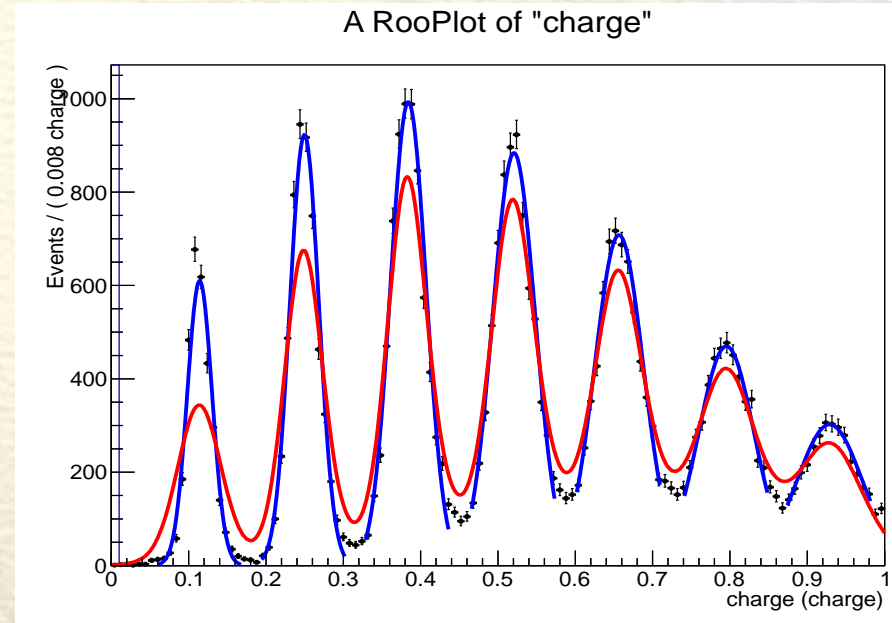

↑  
RooFit multikernel function  
Individual Gaussian fits

# Gain vs Voltage for CPTA 857


- Each point is the gain extracted from 50k waveforms of 80 ns
- Linear fit to these distributions yields break-down voltage &  $dG/dV$
- Break-down voltage drops with T
- $dG/dV \sim$  capacitance is not constant  
→ it increases linearly with temperature

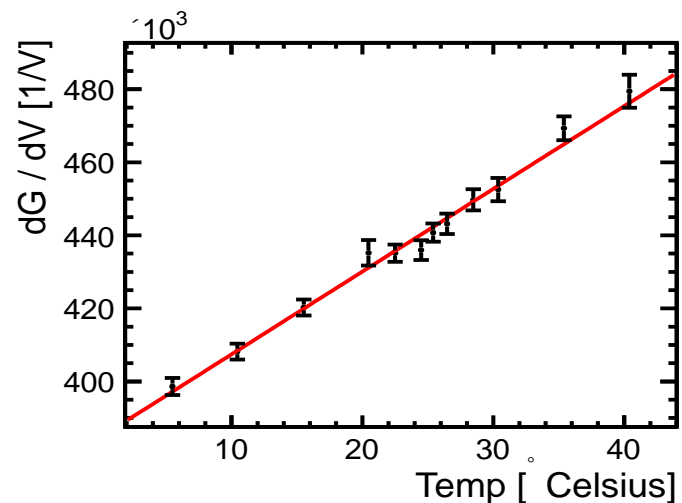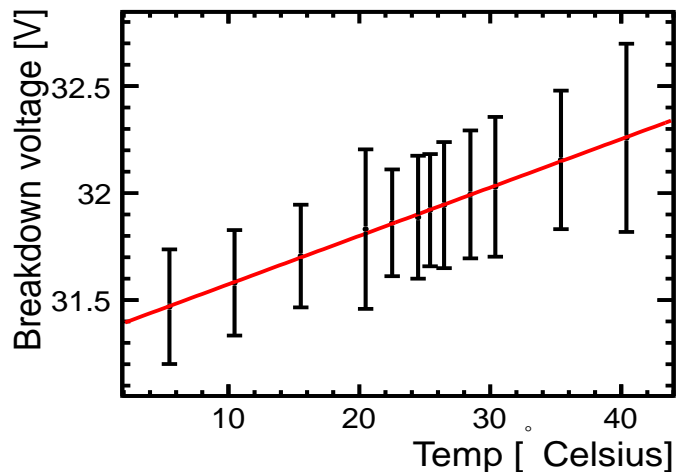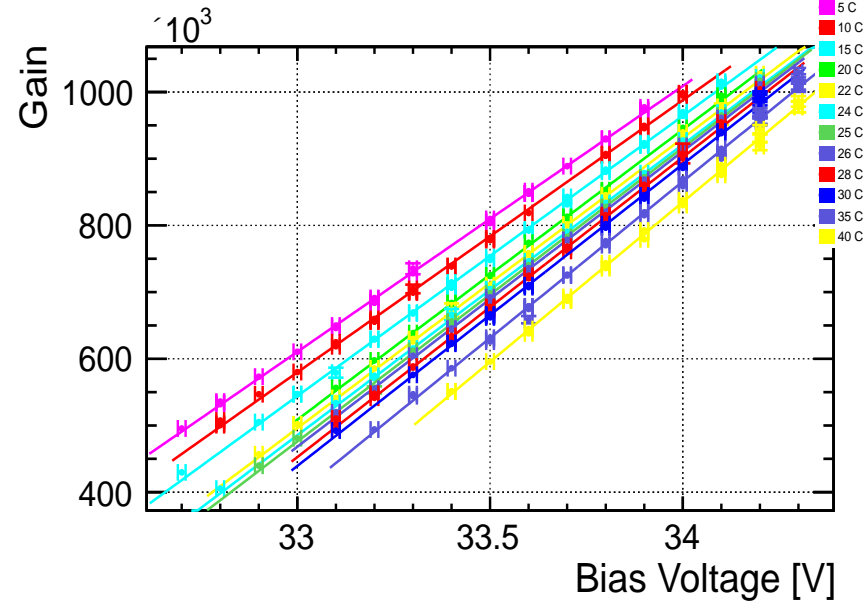



# Gain vs Temperature for CPTA 857


- At  $V_{\text{bias}}=33.4 \text{ V}$  &  $T=25^\circ\text{C}$ :  
 $G=6.4 \times 10^5$
- Extract  $V_{\text{breakdown}}=31.9 \text{ V}$
- 0<sup>th</sup> order polynomial fit yields:  
 $dG/dV=(4.32 \pm 0.01_{\text{stat}}) \times 10^5/\text{K}$
- 1<sup>st</sup> order polynomial fit yields:  
 $dG/dV=(4.41 \pm 0.11_{\text{sys}}) \times 10^5/\text{K}$

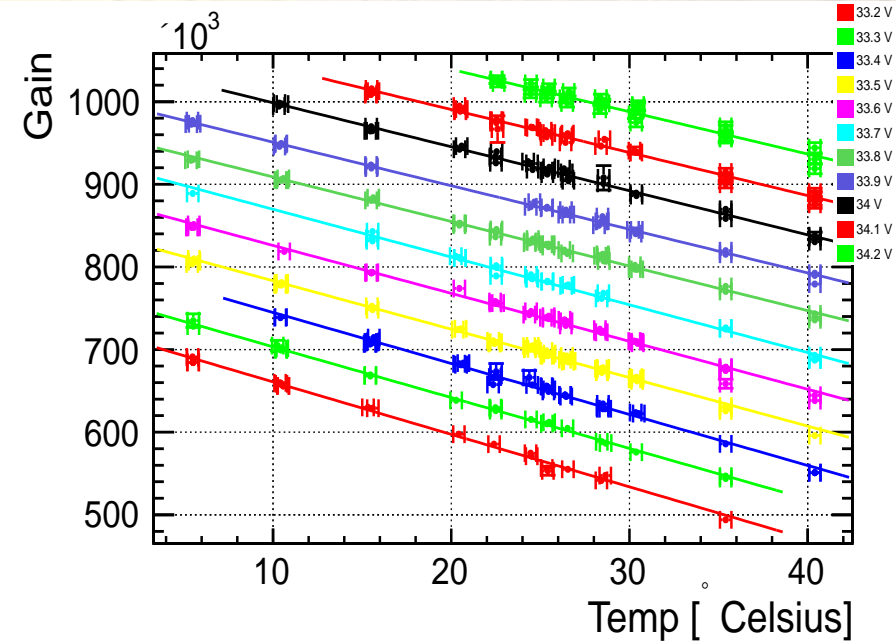

- 0<sup>th</sup> order polynomial fit yields:  
 $dG/dT=(-5.76 \pm 0.02_{\text{stat}}) \times 10^3/\text{K}$


- Determine:  
 $dV/dT = \langle dG/dT \rangle / \langle dG/dV \rangle$   
 $= 13.33 \pm 0.35 \text{ mV/K}$

- Gain stability:  
 $\sigma(dV/dT) \cdot (dG/dV) \cdot (\Delta T/G)$   
 $= 0.31\%$

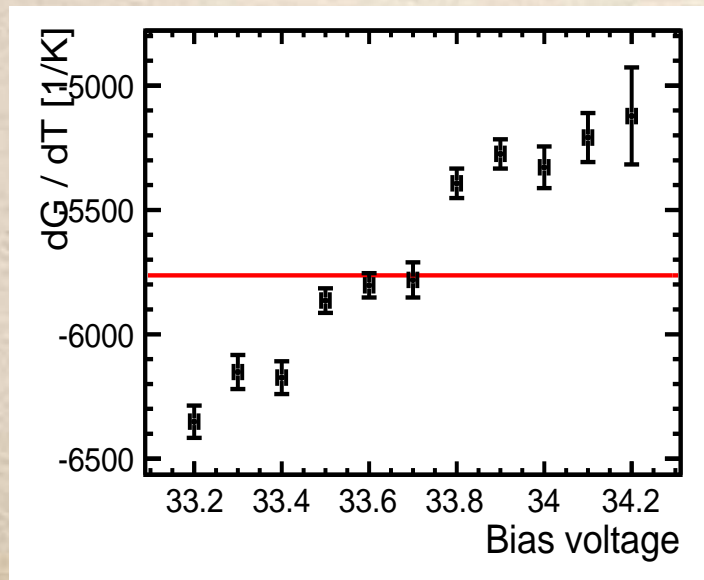

# Gain after $V_{bias}$ Adjustment for CPTA 857

- Adjust voltage using  $V_{bias}$  regulator test board  
(Note: color code gives the range of voltage applied  
e.g. blue:  $33.35 < V_{bias} < 33.45$ )

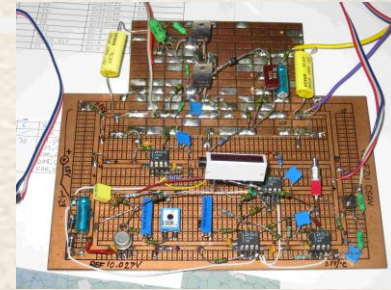

- At each temperature, take 20 samples with 50k waveform each

- Linear fit to all data points


- offset:  $(6.71 \pm 0.02) \times 10^5$

- slope:  $15.38 \pm 75.87$

- Gain is uniform in range of interest  $5^\circ - 40^\circ\text{C}$




→ measured non-uniformity is  $< \pm 0.04\%$

CPTA 857

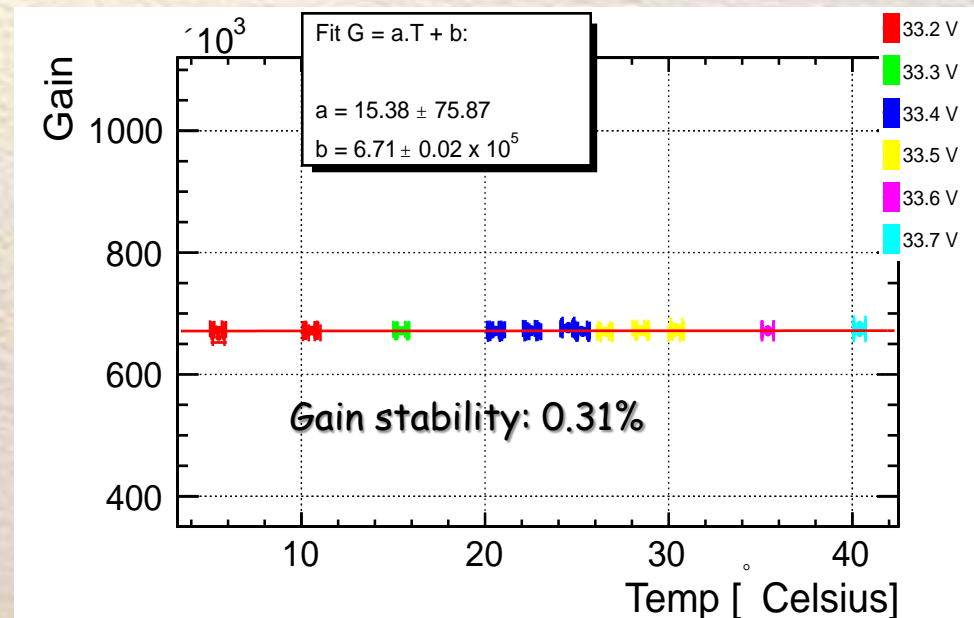

# Gain after $V_{bias}$ Adjustment for other SiPMs

- Perform similar study with 3 other SiPMs from **CPTA**, **KETEK** and **Hamamatsu**

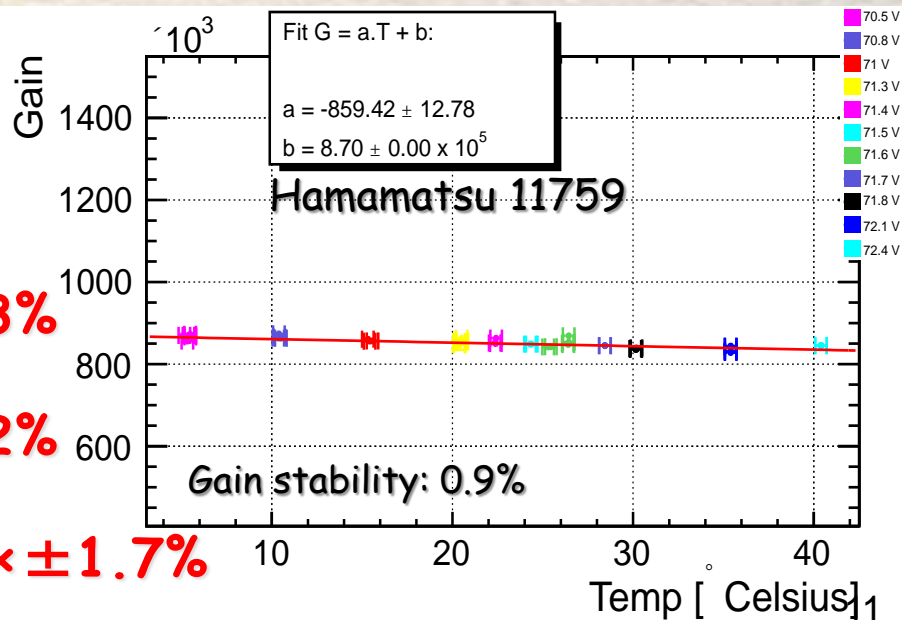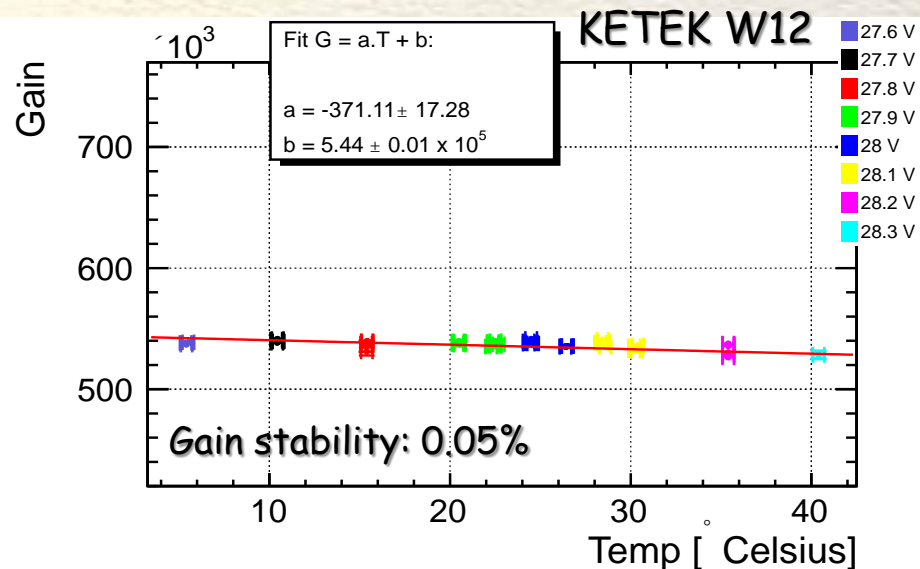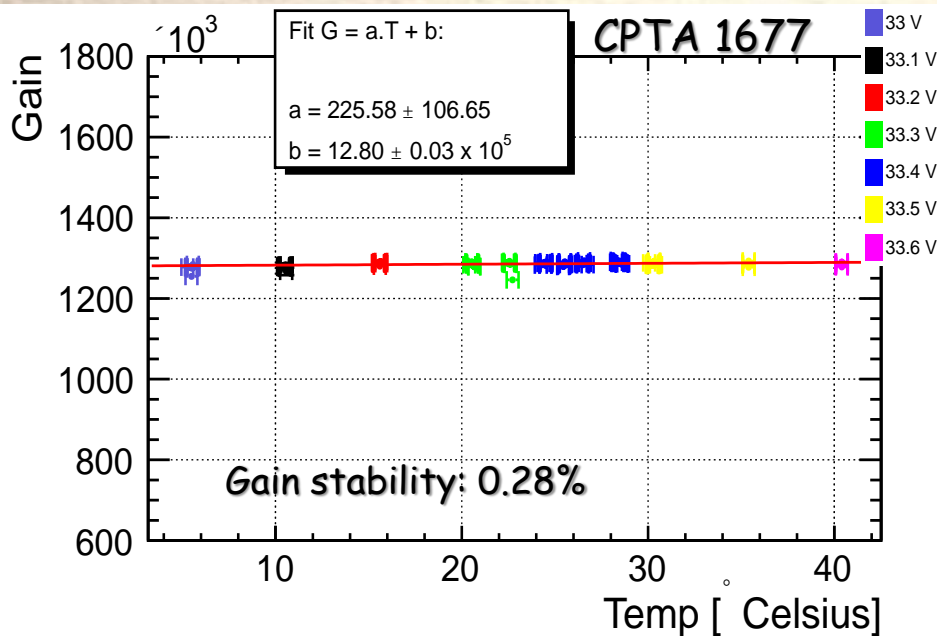



- CPTA 1677**: non-uniformity  $< \pm 0.3\%$
- KETEK W12**: non-uniformity  $< \pm 1.2\%$
- Hamamatsu 11759**: non-uniformity  $< \pm 1.7\%$

# Summary of the 2013 measurements

- Results from the measurements @ CERN 2013:
  - 4 SiPM measured and compensated
    - T range  $5^{\circ} - 40^{\circ}\text{C}$
    - Large statistics taken,  $dG/dV$ ,  $dG/dT$  calculated
    - $dV/dT$  extrapolated  $\rightarrow$  used as a compensation constant
    - Measurement taken with the Adaptive  $V_{\text{bias}}$  adjustment test board
  - Various  $dV/dT$ :
    - 15-20 mV/K for CPTA & KETEK sensors
    - 55 mV/K for Hamamatsu sensors
  - Hamamatsu sensors operate at higher  $V_{\text{bias}}$  than CPTA/KETEK sensors
  - Adjustment range  $\Delta V=0.7$  (1.9) V for CPTA & KETEK (Hamamatsu) for
- The gain stabilization with the  $V_{\text{bias}}$  regulator test board works well  $\rightarrow$  for all four tested SiPMs, gain stability is **< 1%** as required




# Adaptive Power Regulator 2<sup>nd</sup> Prototype

- Prototype finished in Jan 2014
  - Extended V range:
    - SiPM <130 V
    - APD <450V
  - Has a front panel
- Delivered to CERN in Feb 2014
  - 5 SiPMs measured, same setup
  - T range extended: 1~50°C
  - Data analysis ongoing

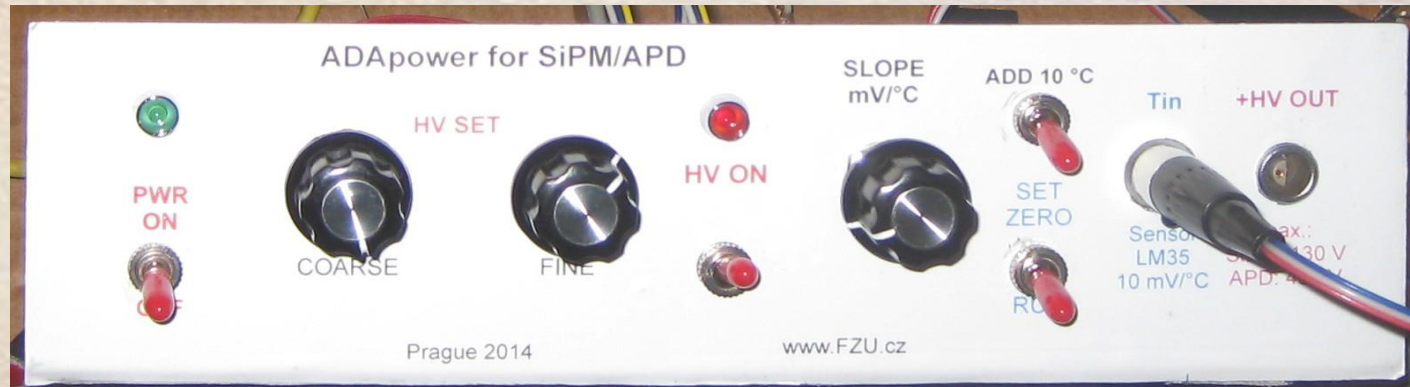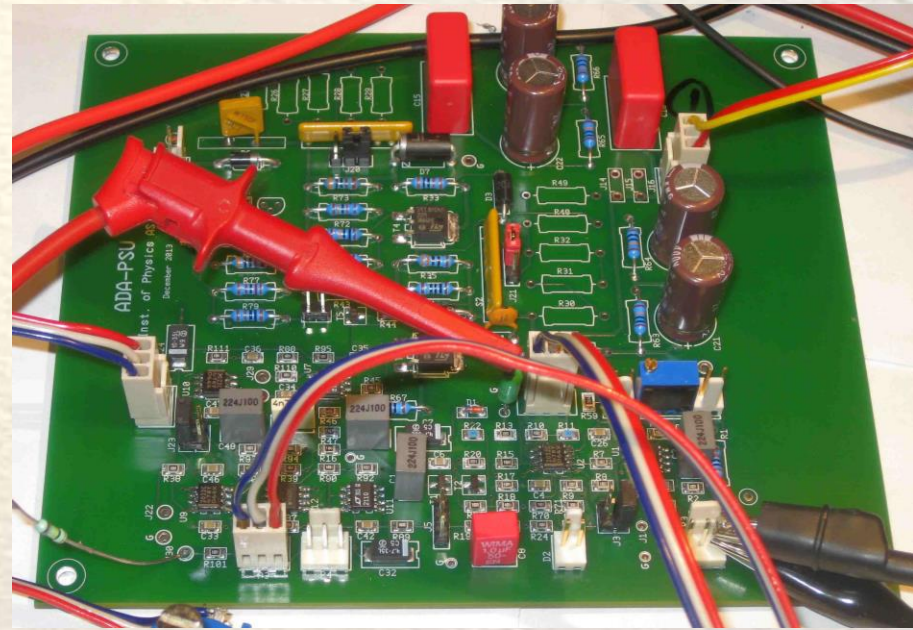

# Analysis (being updated)

- **Some** bad fits observed in the data → losing statistics → we want to **improve** that
  - Problem observed in the histogram
  - Cause: Numerical rounding issue?
- Charge extraction procedure rewritten
- Ongoing evaluation of best fit option
  - Individual peak fits
  - RootKeysPDF
  - Sum of Gaussians (deals better with noisy histograms from high T)

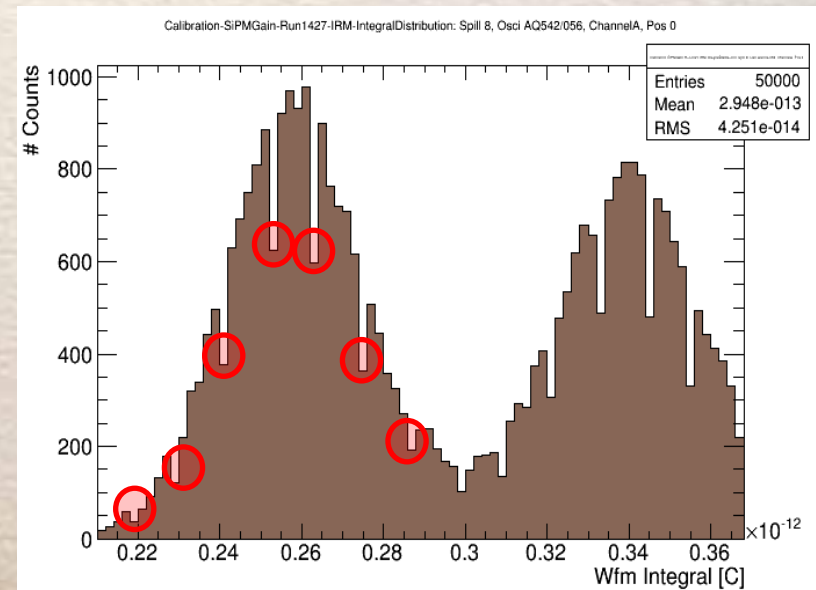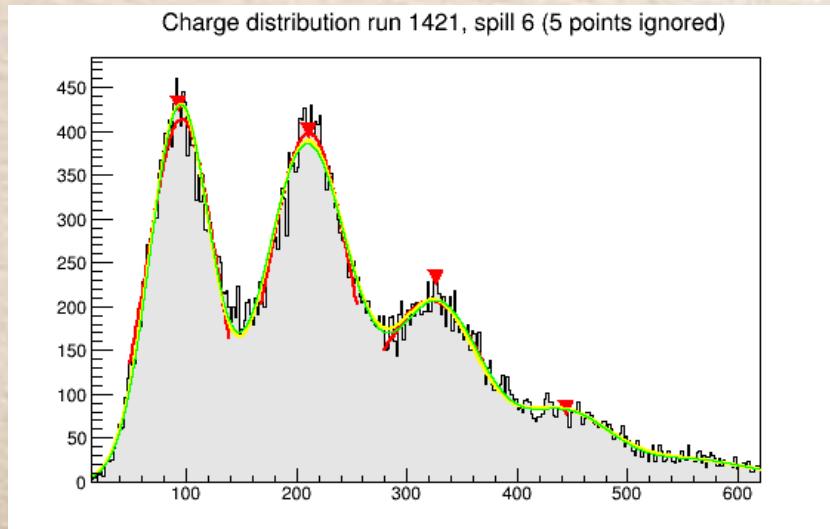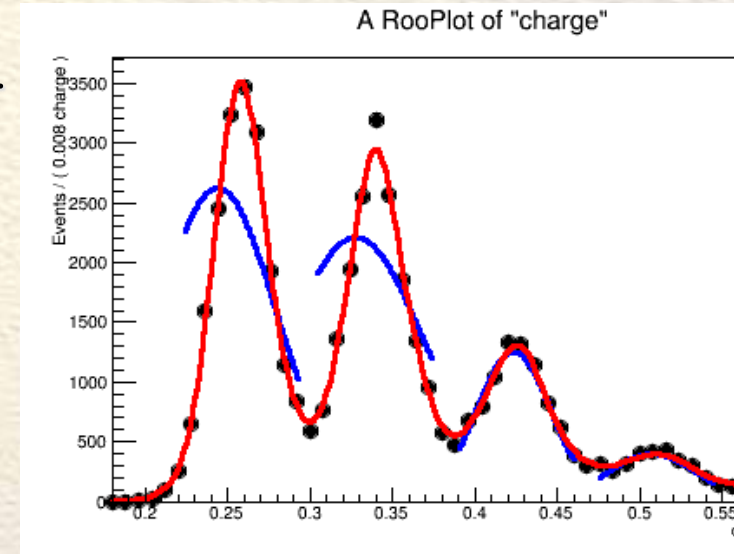

# Summary (2014) and Next Steps

- ADAPower prototype finished Jan 2014
- New data was taken @ CERN Feb 2014 and will be analyzed →
  - Aim for better gain extraction
  - Check the previous (2013) data
- AIDA note almost finished (delayed), will be released soon
- Q2 2014 assemble and finalize few other units of ADAPower box
- Integrate the  $V_{\text{bias}}$  regulator PCB into the FE readout electronics of the AHCAL → summer 2014
- Write final report for AIDA project → fall 2014

# Backup Slides

---



# Voltage Temperature Relation

●  $dV/dT$  is obtained from a ratio of 2 first-order differential equations


●  $dG/dT = a - b \cdot V + O(V^2)$

●  $dG/dV = c + d \cdot T + O(T^2)$

● Thus, an analytical solution exists

● For the above linear case, we get:  $V[T] = \frac{a}{b} + (c + d \cdot T)^{\frac{-b}{d}} \cdot C \quad (d \neq 0)$

● For a linear model in  $dG/dT$  and  $dG/dV$  find following  $V$  versus  $T$  dependence

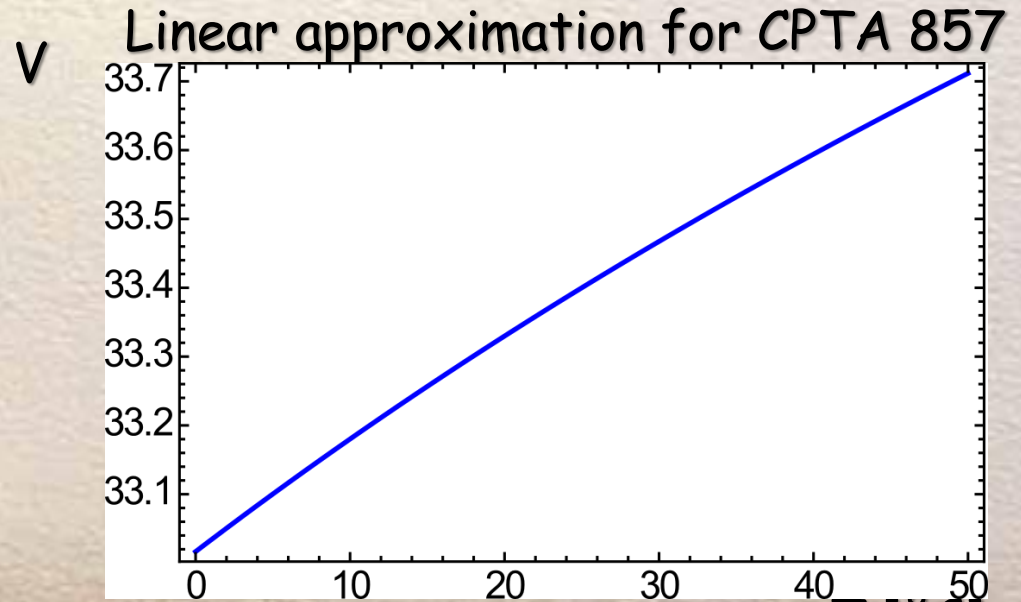

# Summary of dV/dT Measurements

- $V_{\text{bias}}$  for Hamamatsu is  $\sim 70$  V while  $V_{\text{bias}}$  for CPTA is  $\sim 33$  V &  $V_{\text{bias}}$  for KETEK is  $\sim 28$  V


- For KETEK and CPTA, dV/dT is  $\sim 15-20$  mV/K for Hamamatsu, dV/dT is  $\sim 55$  mV/K

- Thus, compensation will be simpler for CPTA and KETEK SiPMs

- We tested the compensation on:






- 4 SiPMs in 2013

- The same 4 and 1 additional SiPMs in 2014

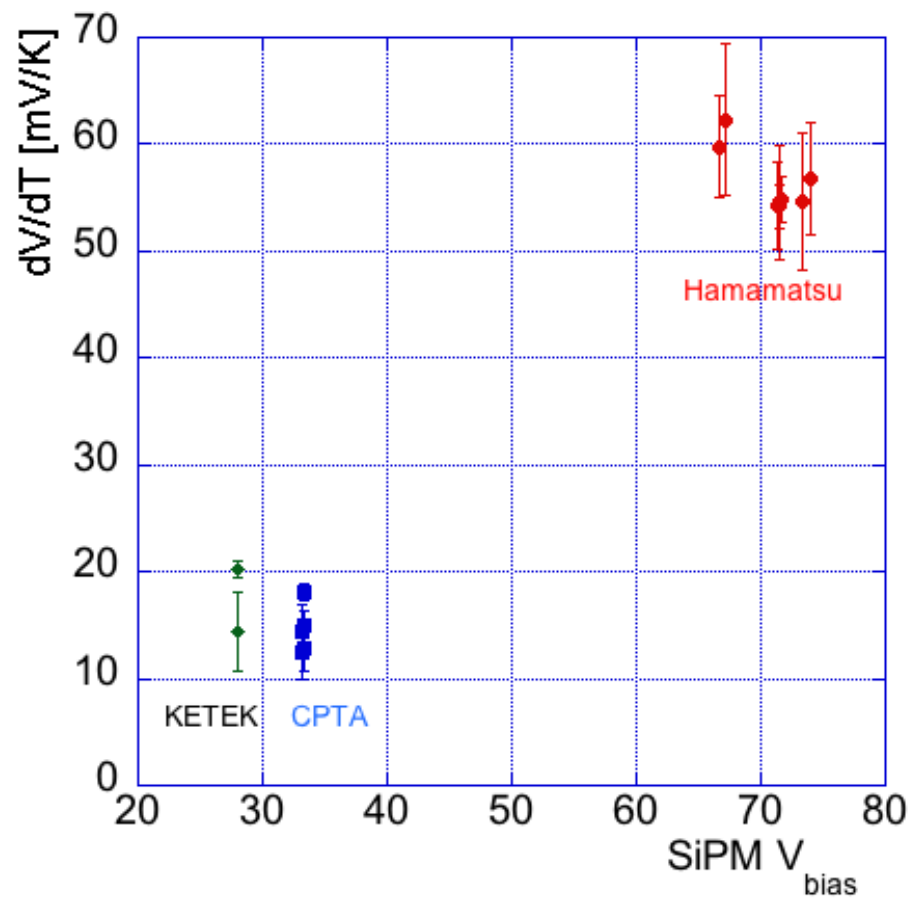






# Results for CPTA 1677

● Extract  $dV/dT=18.51 \pm 0.31$  mV/K and gain stability of 0.1%

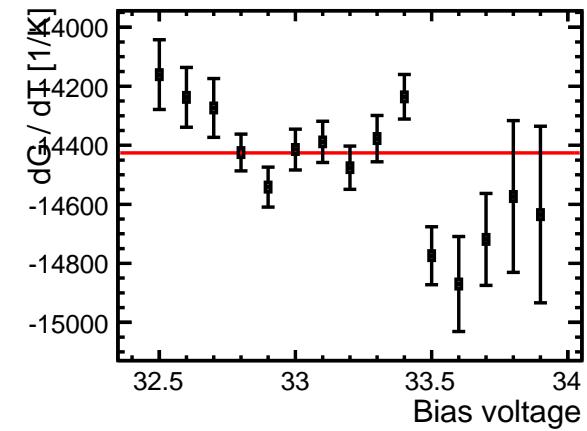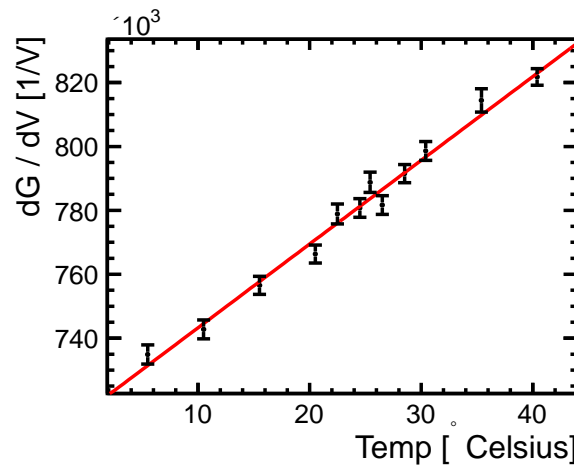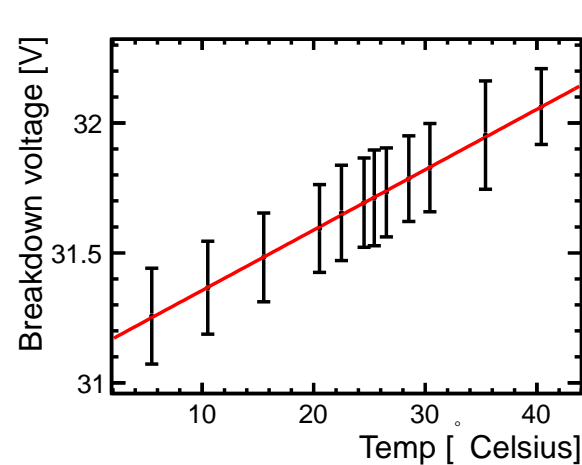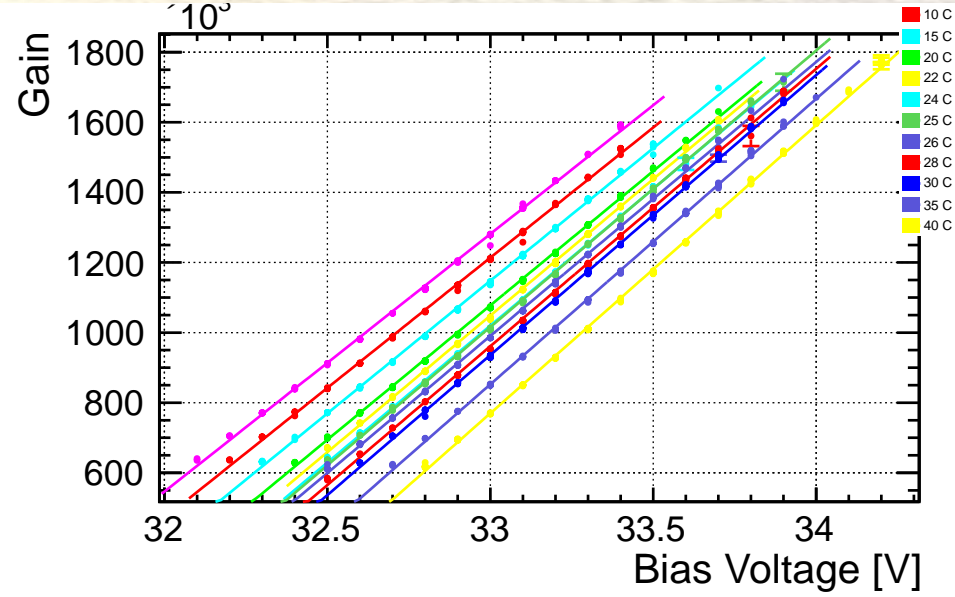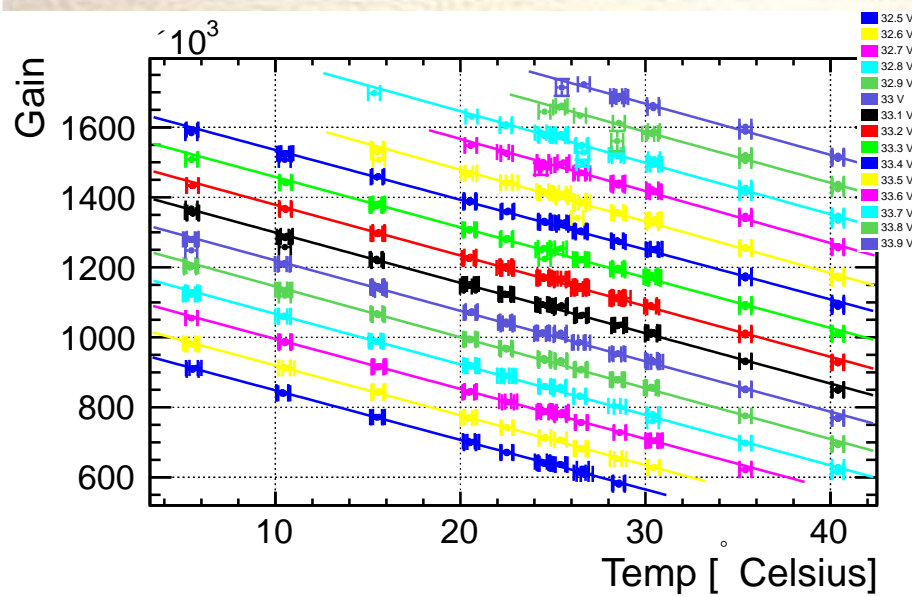

# Results for KETEK W12

● Extract  $dV/dT=21.29 \pm 0.08$  mV/K and gain stability of 0.01%

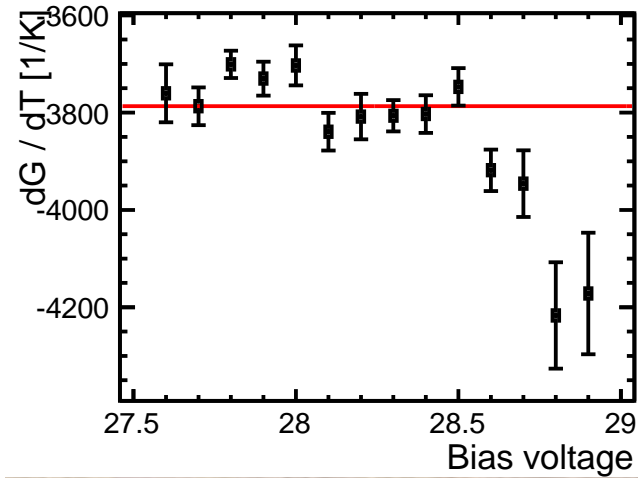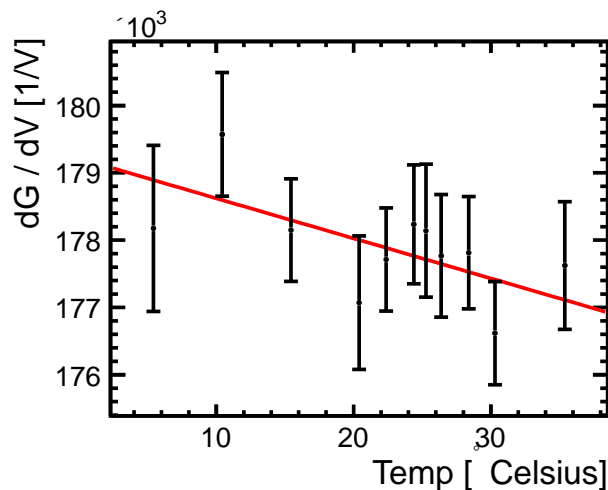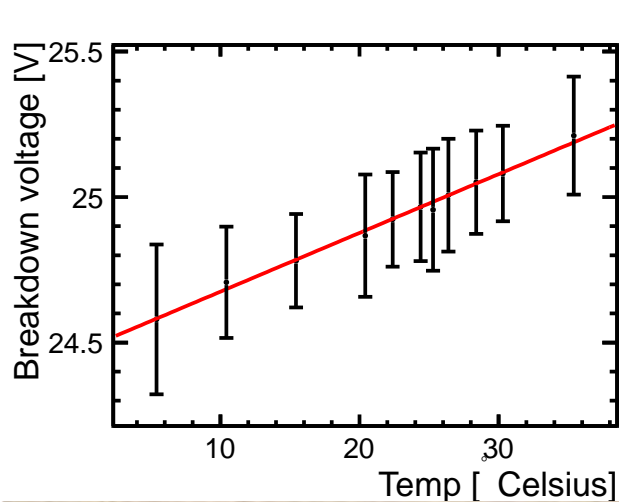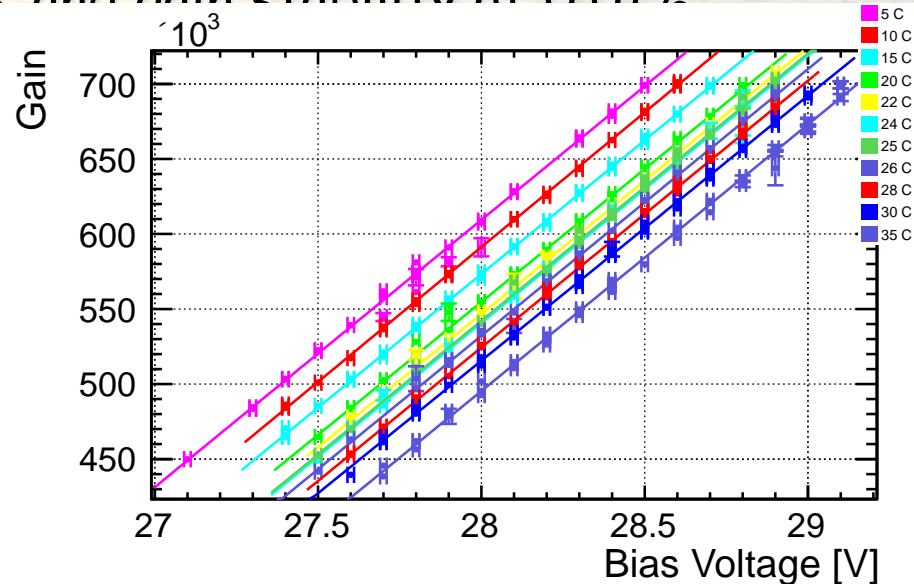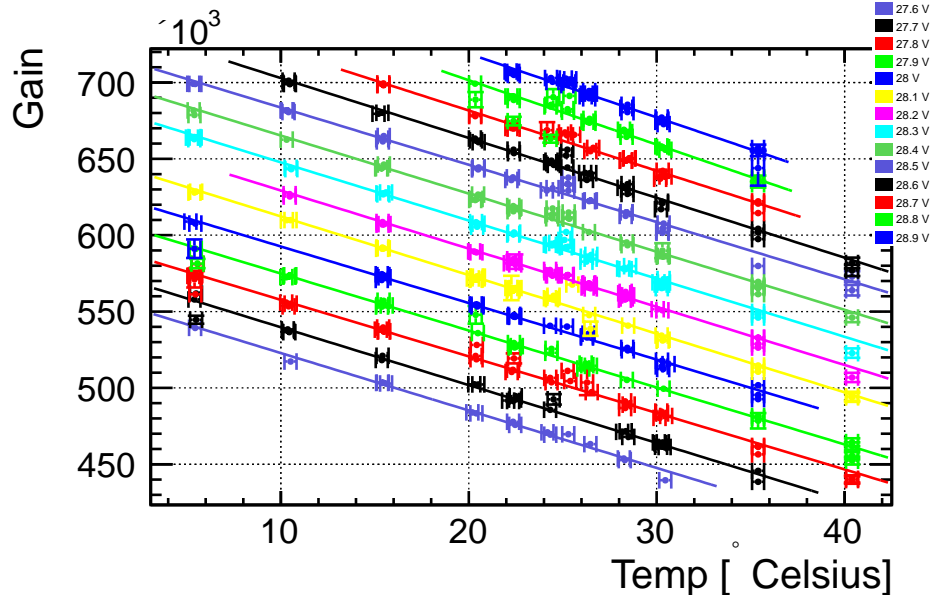

# Results for Hamamatsu

● Extract  $dV/dT=54.3 \pm 0.75$  mV/K and gain stability of 0.28%

