

*Presentation and
discussion about the
energy measurement in
the ECAL*

J-Y. Hostachy and L. Morin
LPSC-Grenoble


Problem: existence of the guard-rings

CERN DATA
($\theta=0$ degree)

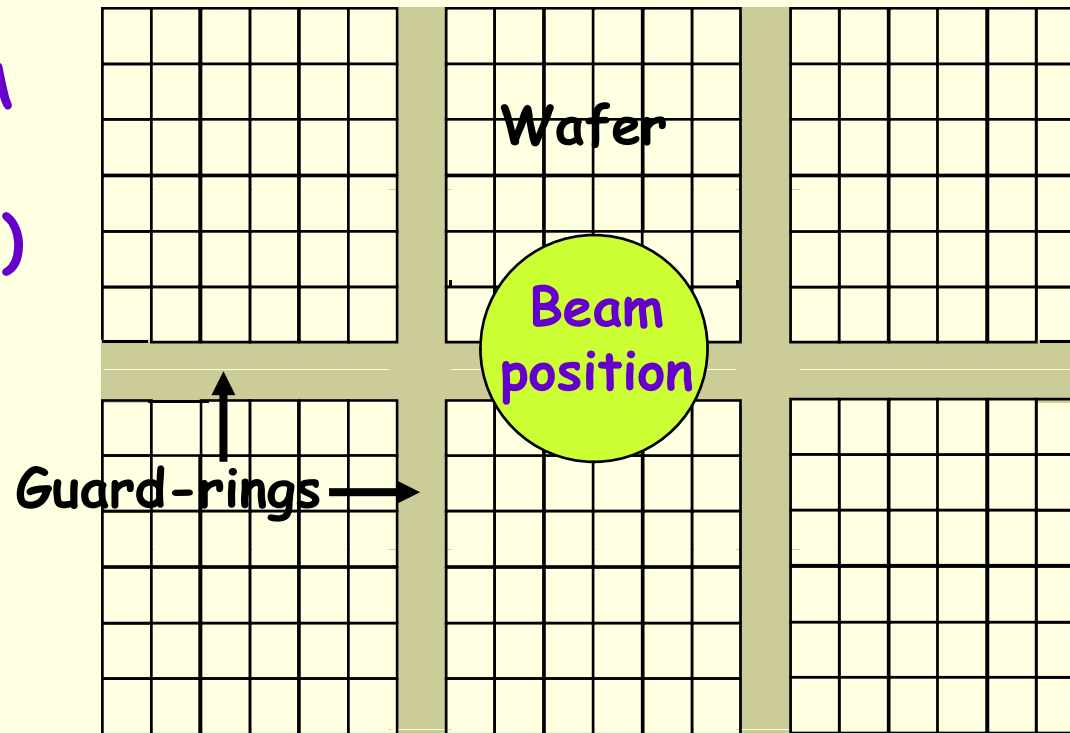


Selection of the electrons

Obtained from the shape of the showers (σ_x , σ_y and σ_z)

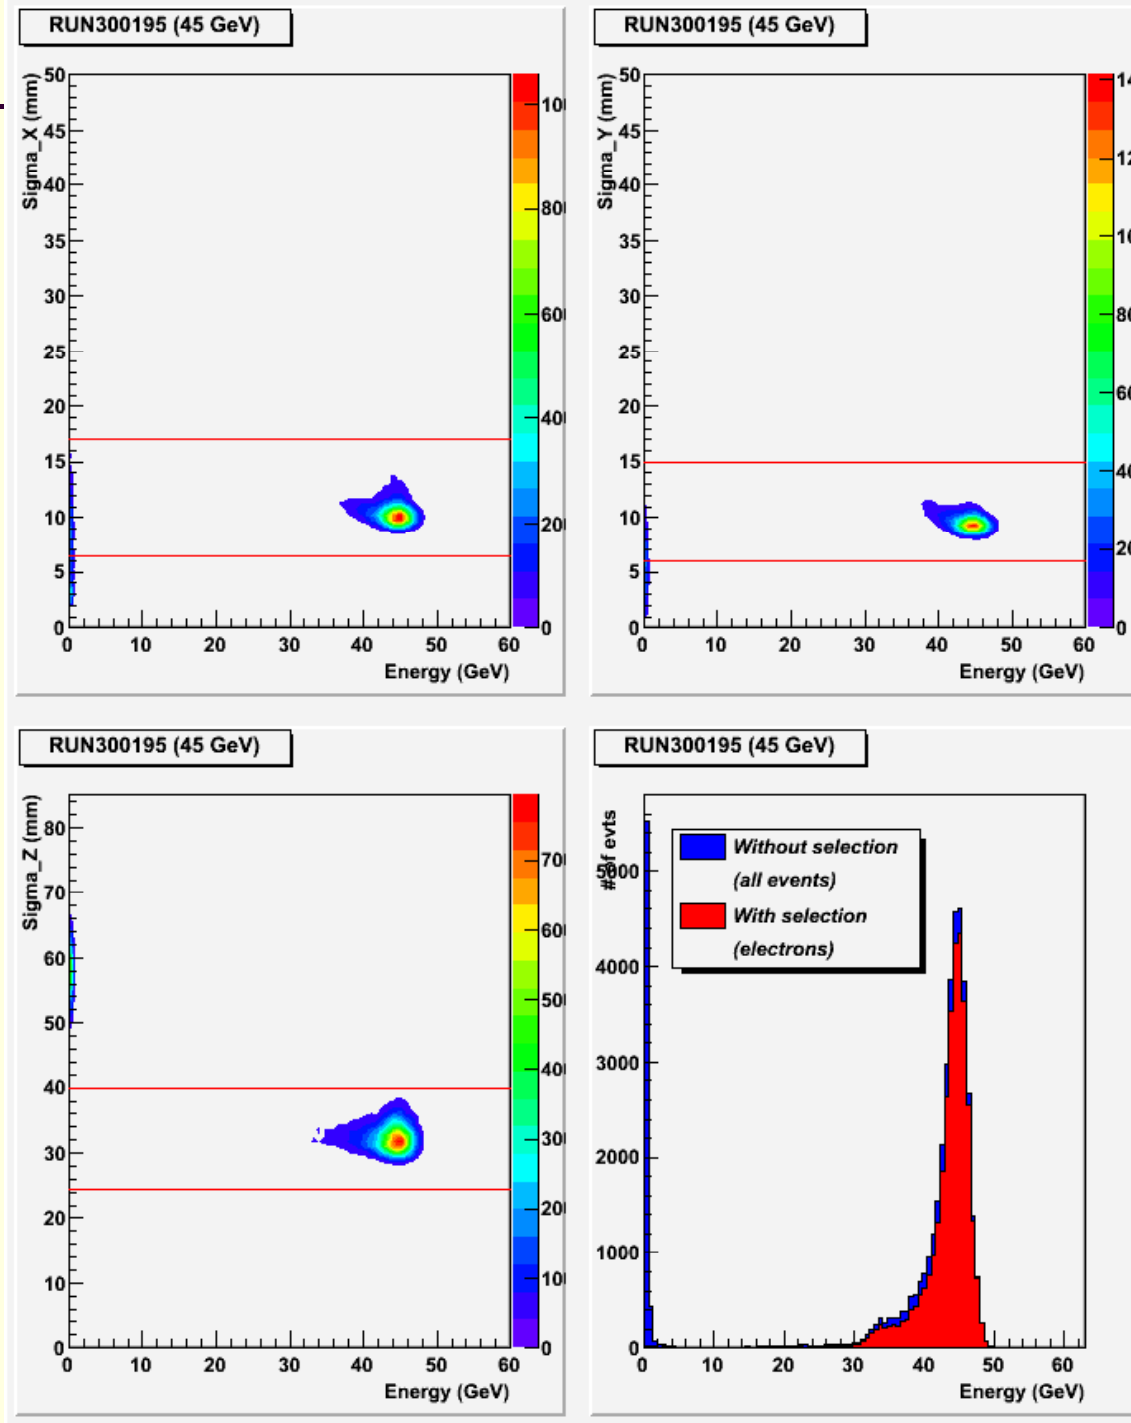

Effect of the
guard-rings
(drawings of
the profiles)

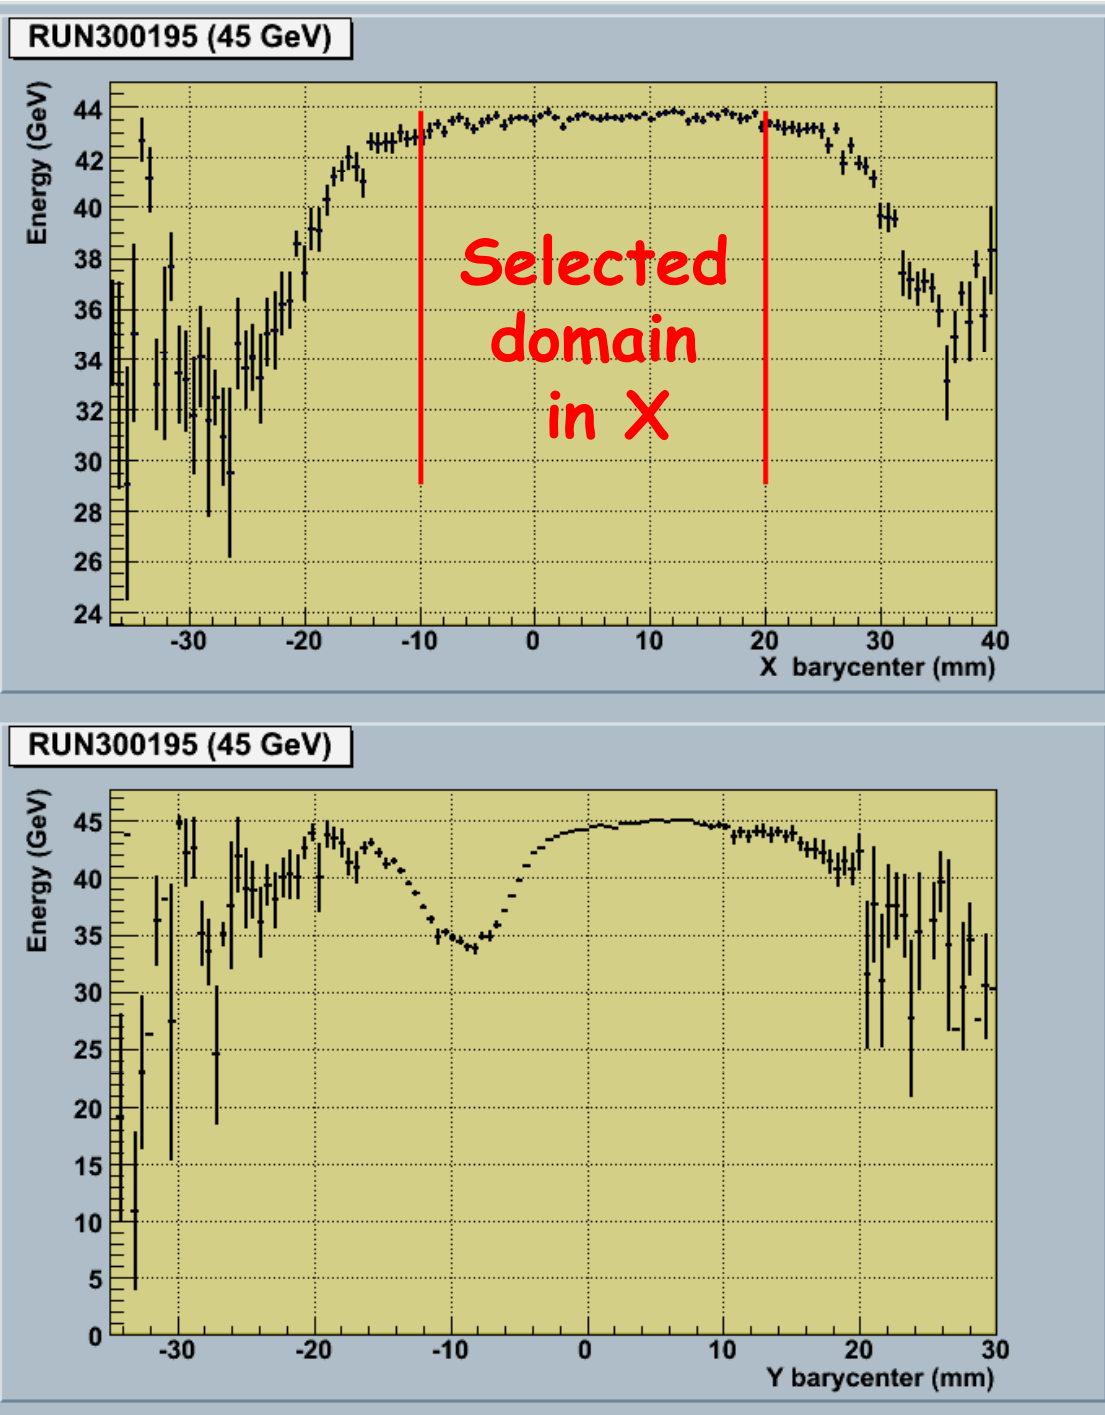

Correction in γ

Fit :

Plateau (1 parameter) – Gaussian (3 parameters)

$$[3] - [0] \cdot e^{-\frac{(Y-[1])^2}{2 \cdot [2]^2}}$$

(where parameter [2] = RMS)


Fonction of correction :

(only 3 parameters)





$$\frac{[3]}{[3] - [0] \cdot e^{-\frac{(Y-[1])^2}{2 \cdot [2]^2}}} = \frac{1}{1 - [0'] \cdot e^{-\frac{(Y-[1])^2}{2 \cdot [2]^2}}}$$

RUN300195 (45 GeV)


Results:
global
correction
in Y

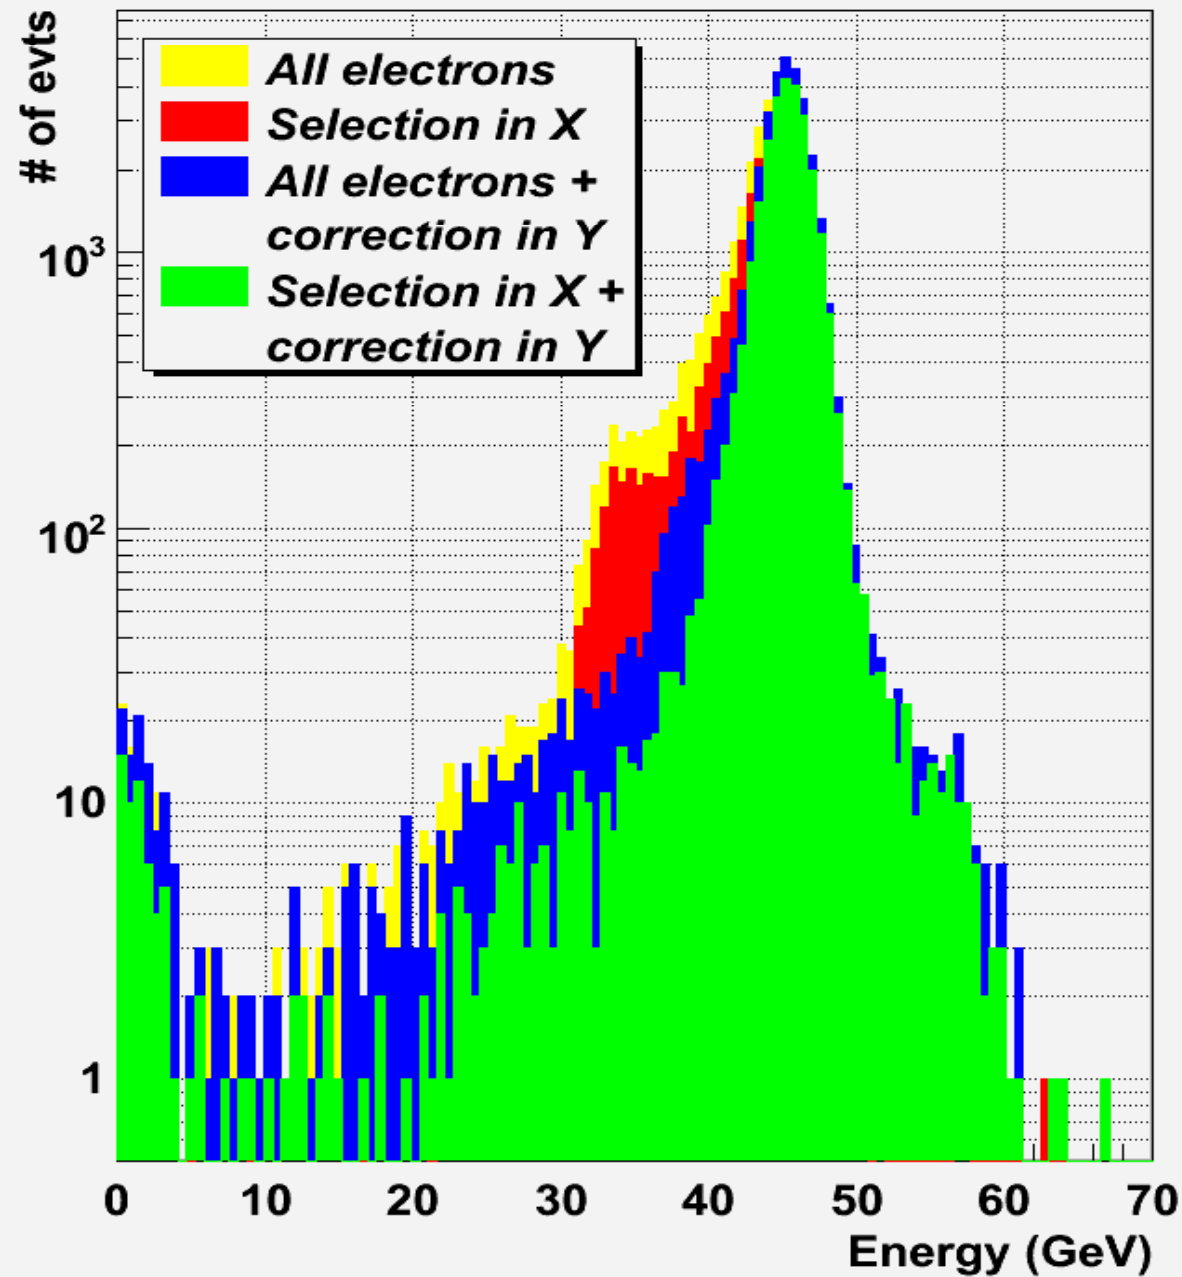

Some troubles

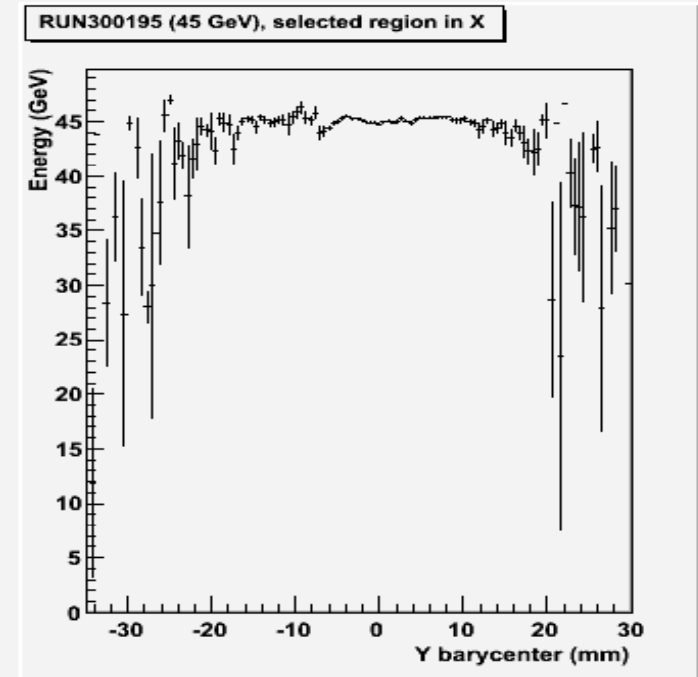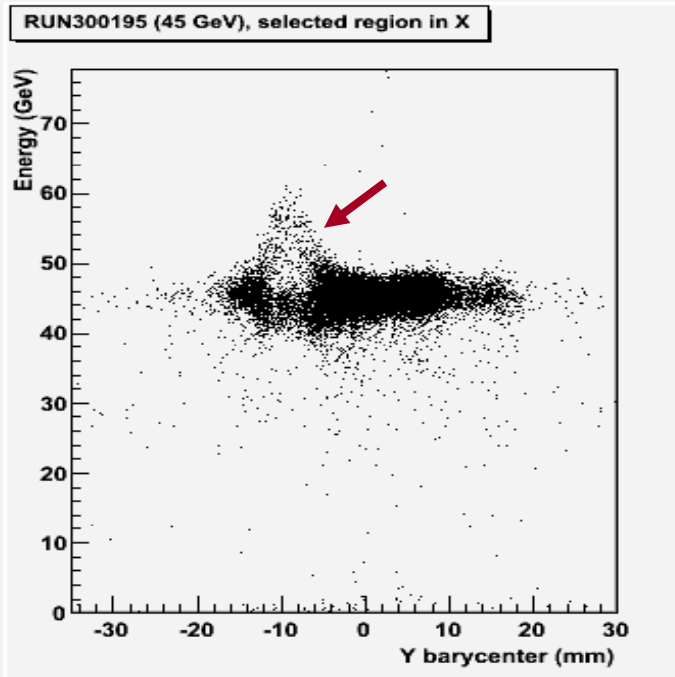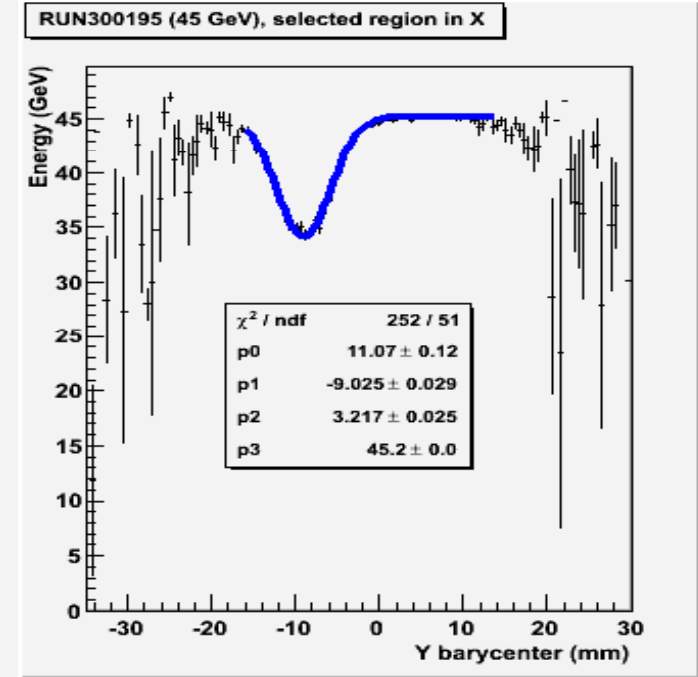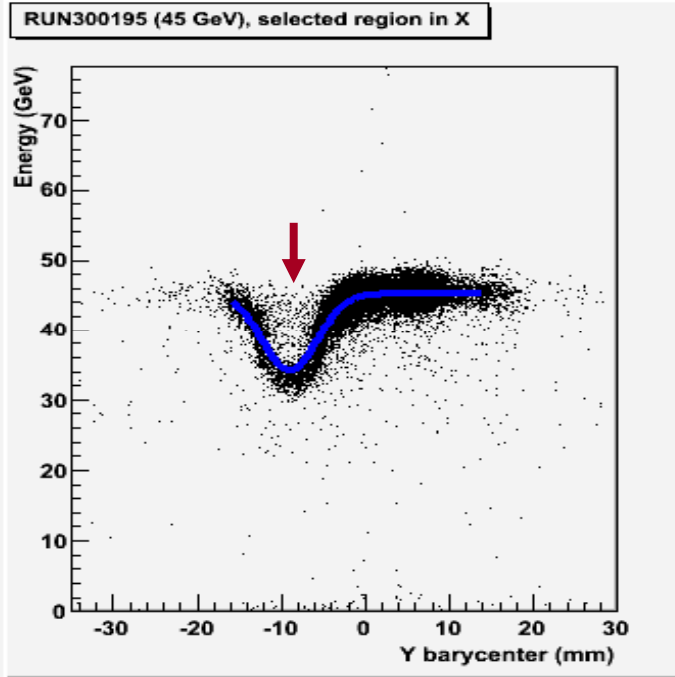

Layer per layer correction

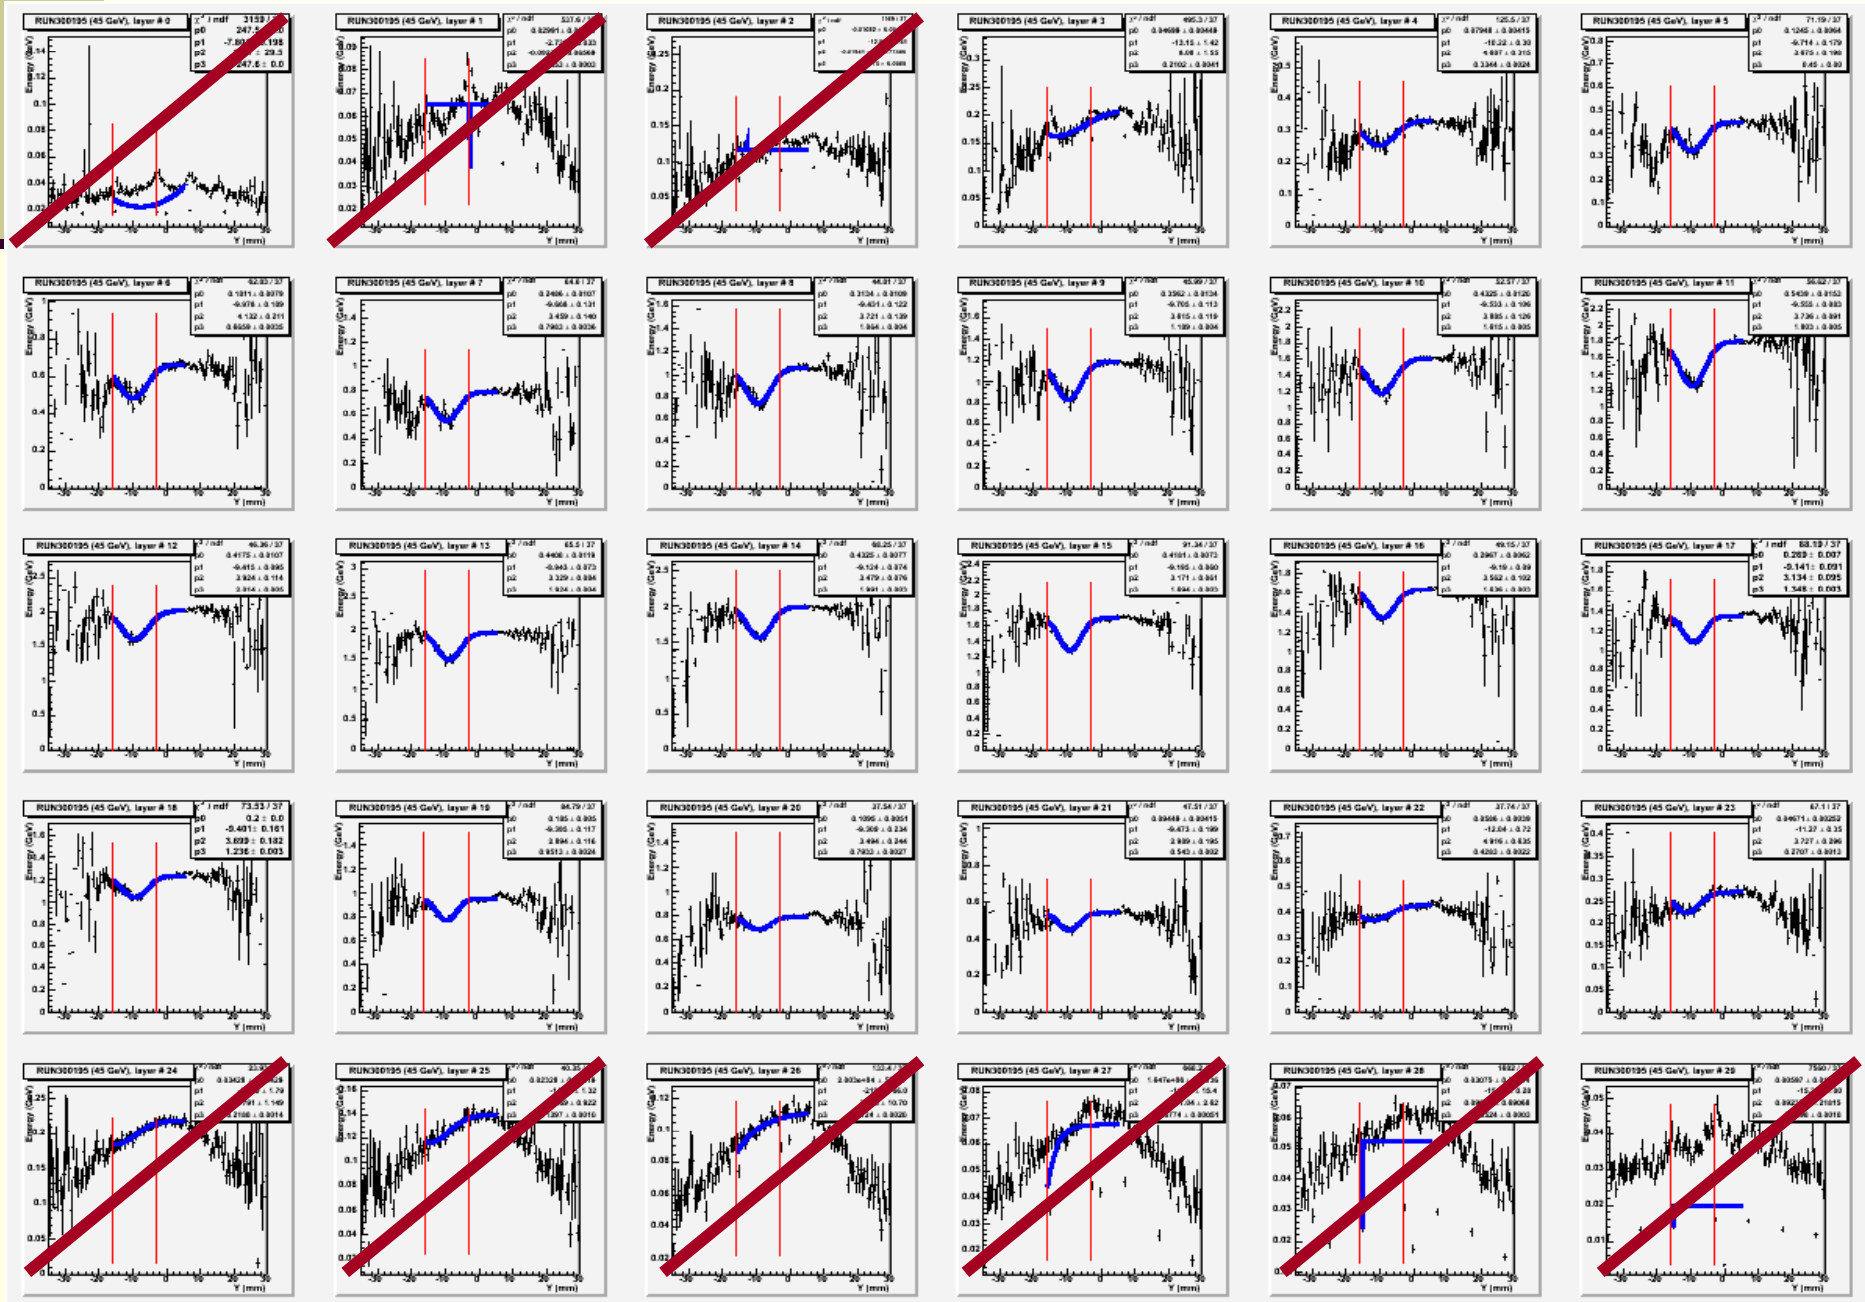


Remarks:

In the previous histograms :

$Y = Y$ barycenter calculated in the studied layer





Energy = Energy deposited in the studied layer

It is not always possible to fit the response of each layer, for instance : layer # 0. In that case, for these layers, there will be no correction in Y .

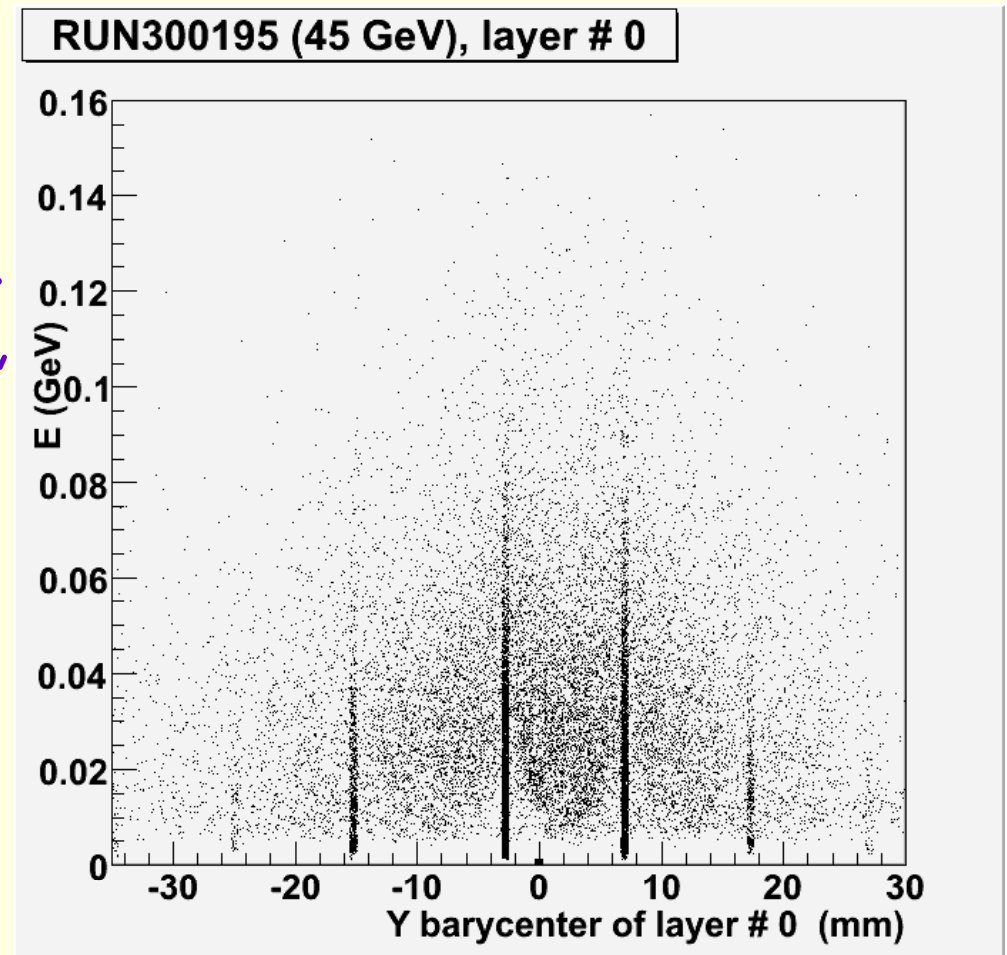


Fitting parameters (45 GeV)

Not the same
sampling term
between even
and odd layers!

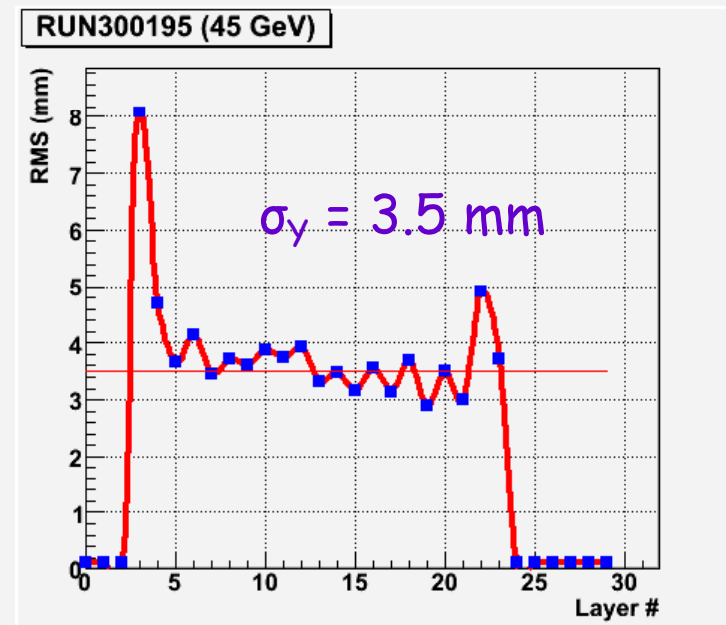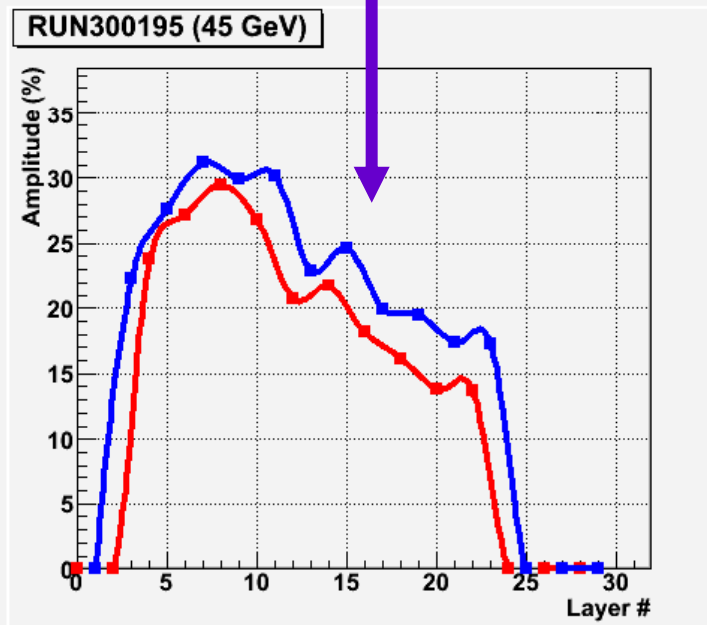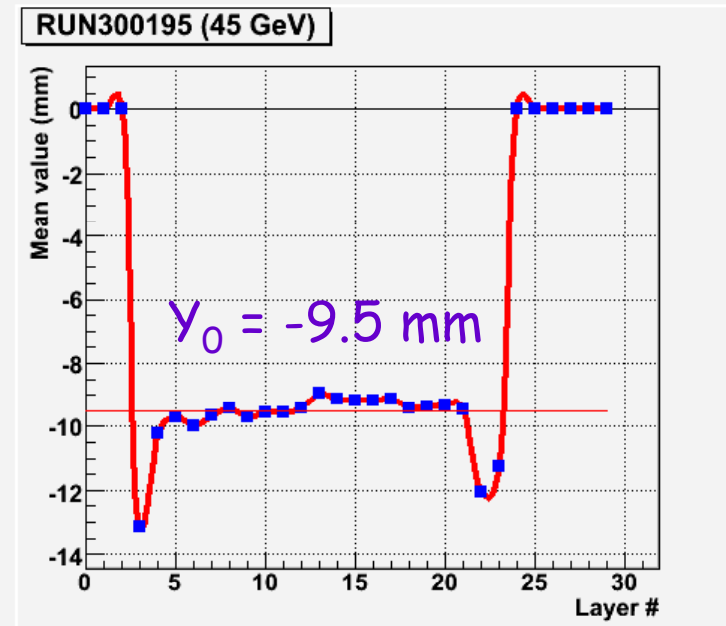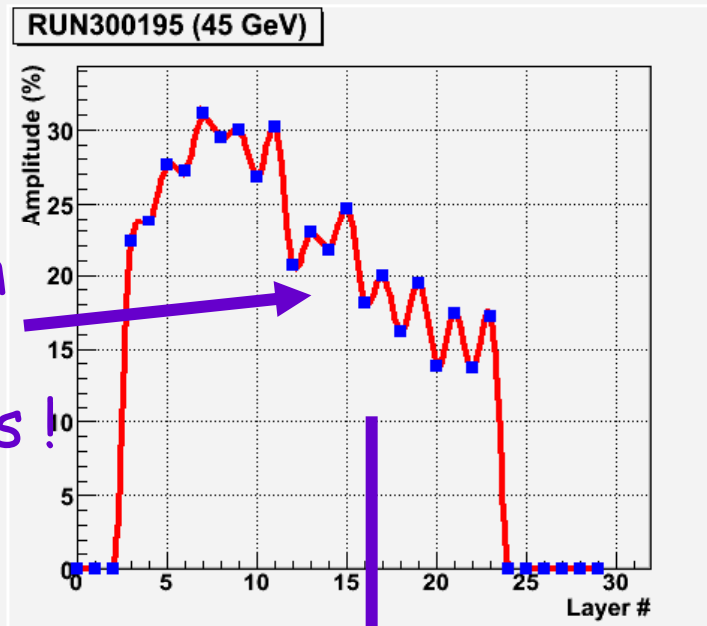



With only 2 param. (\Rightarrow 1 param. for the corrective function)

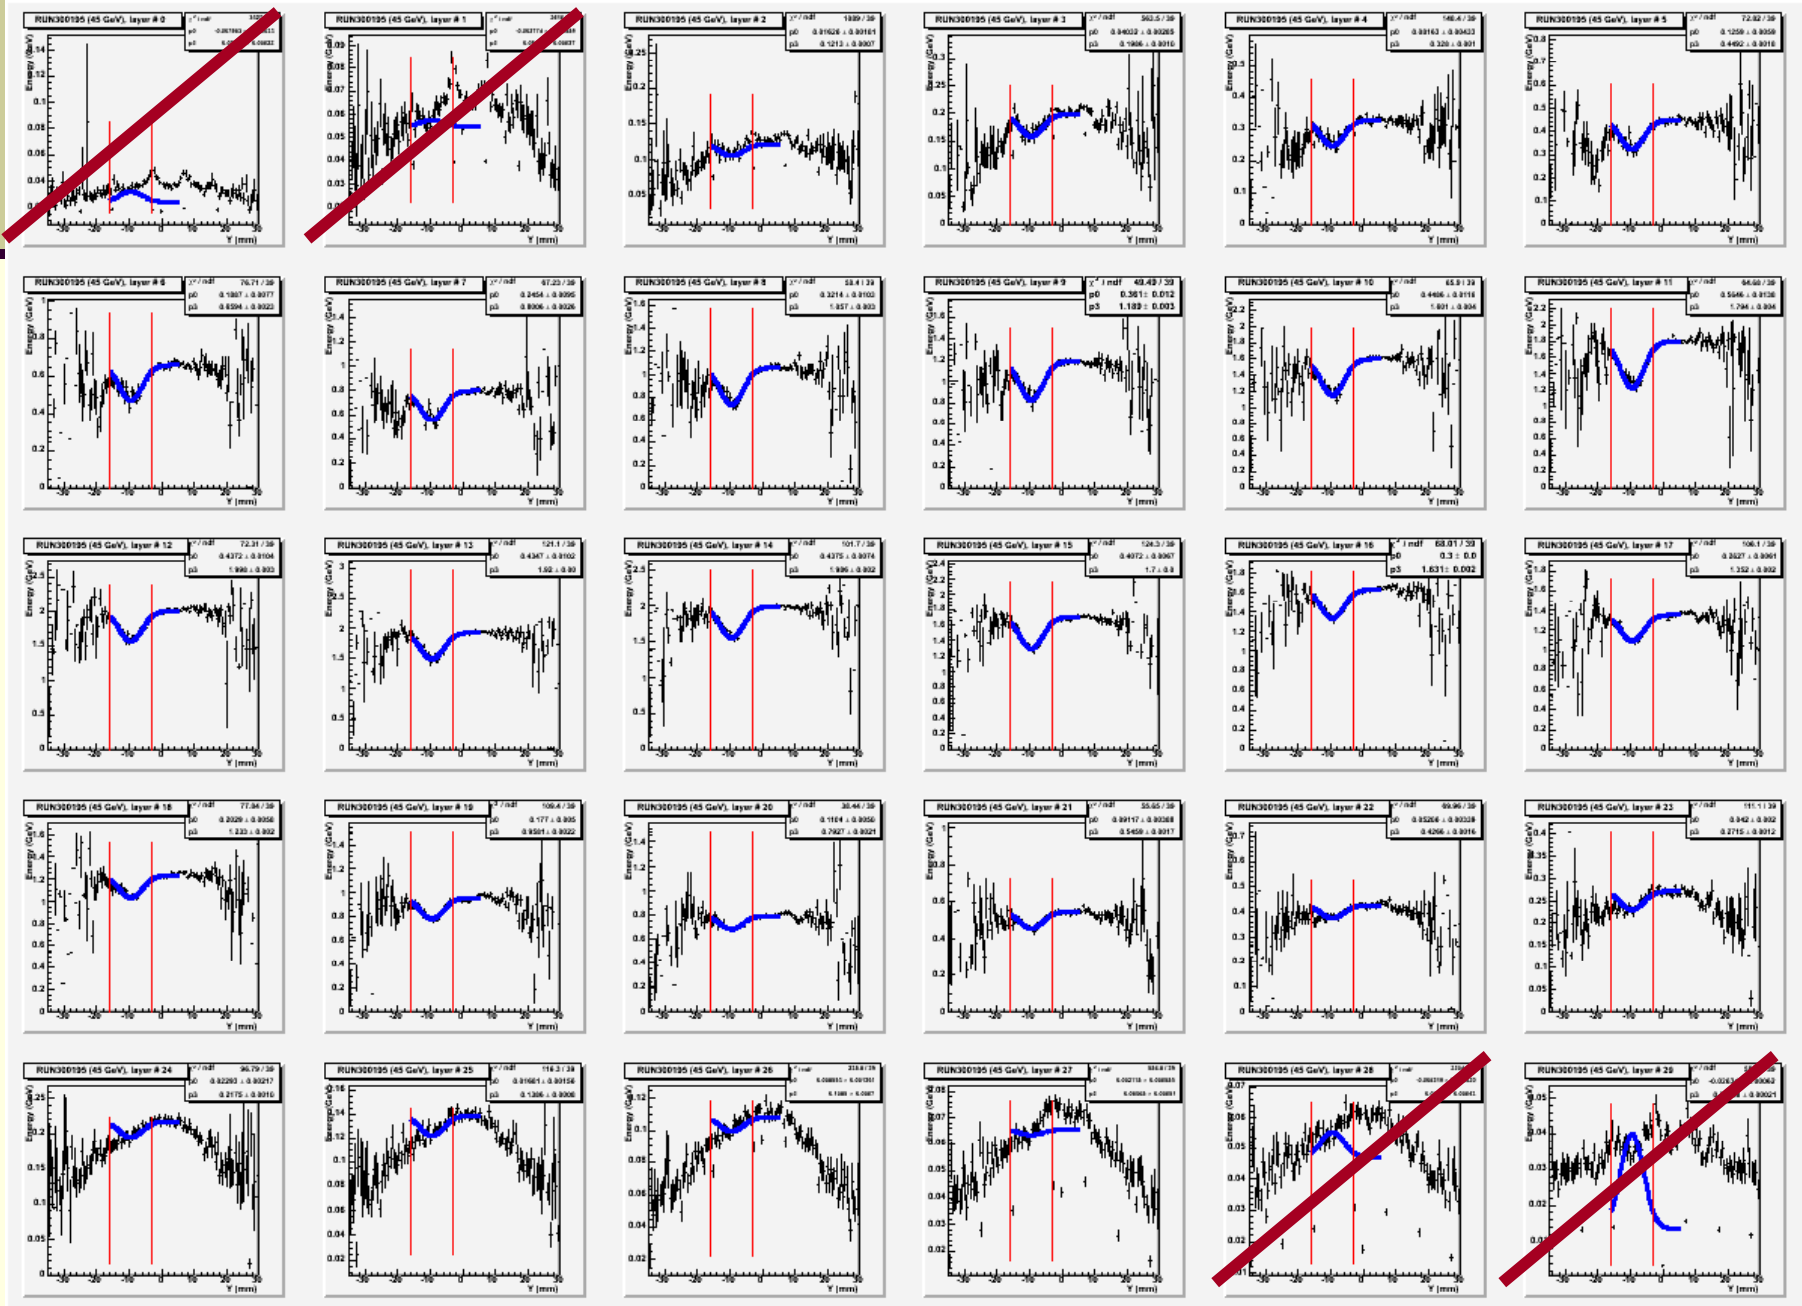

Results (45 GeV)


RUN300195 (45 GeV)

RUN300195 (45 GeV)

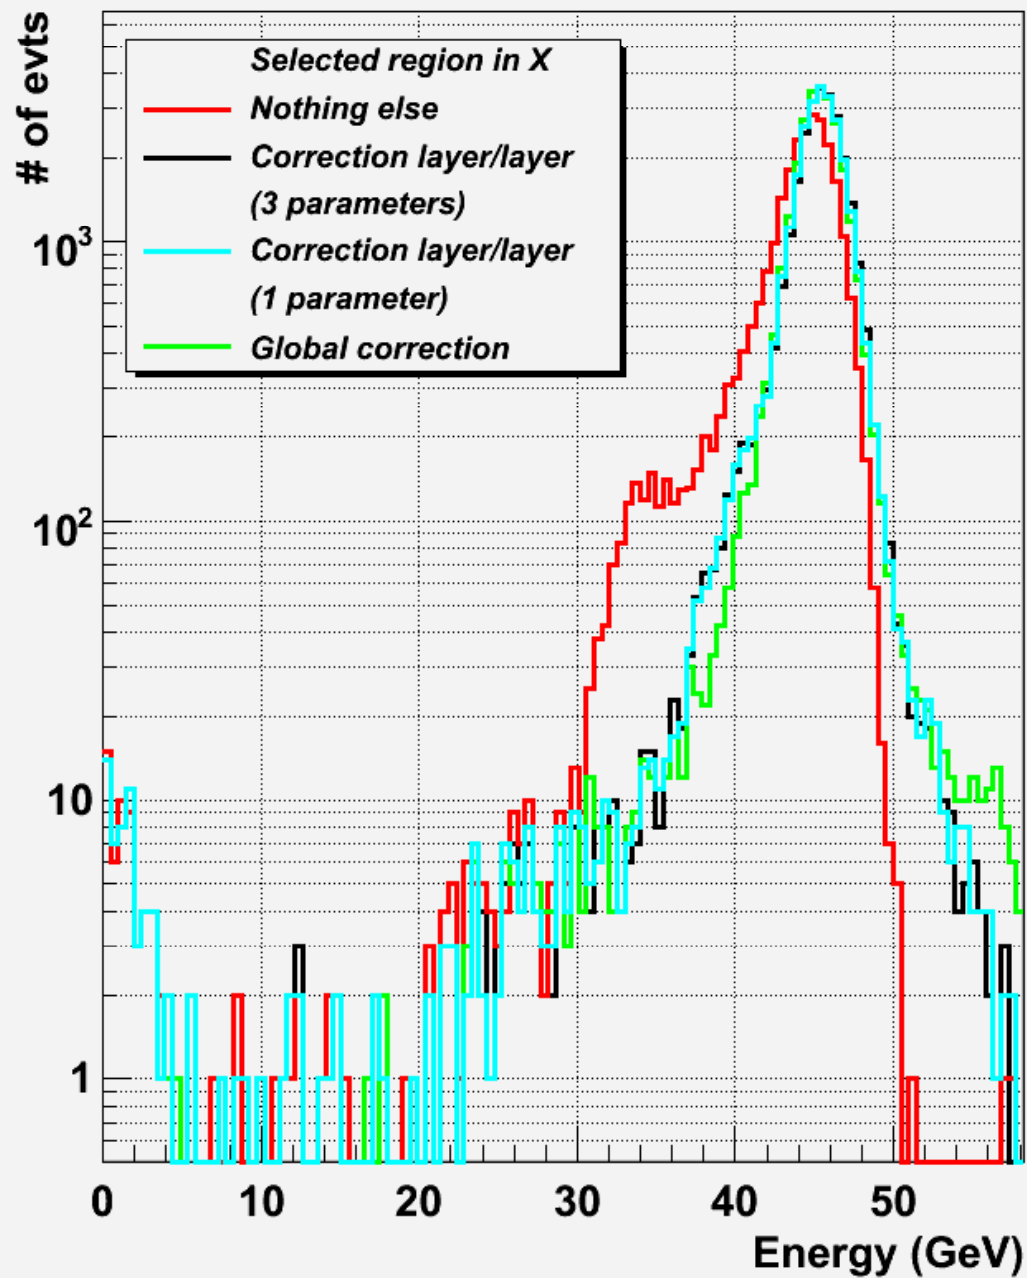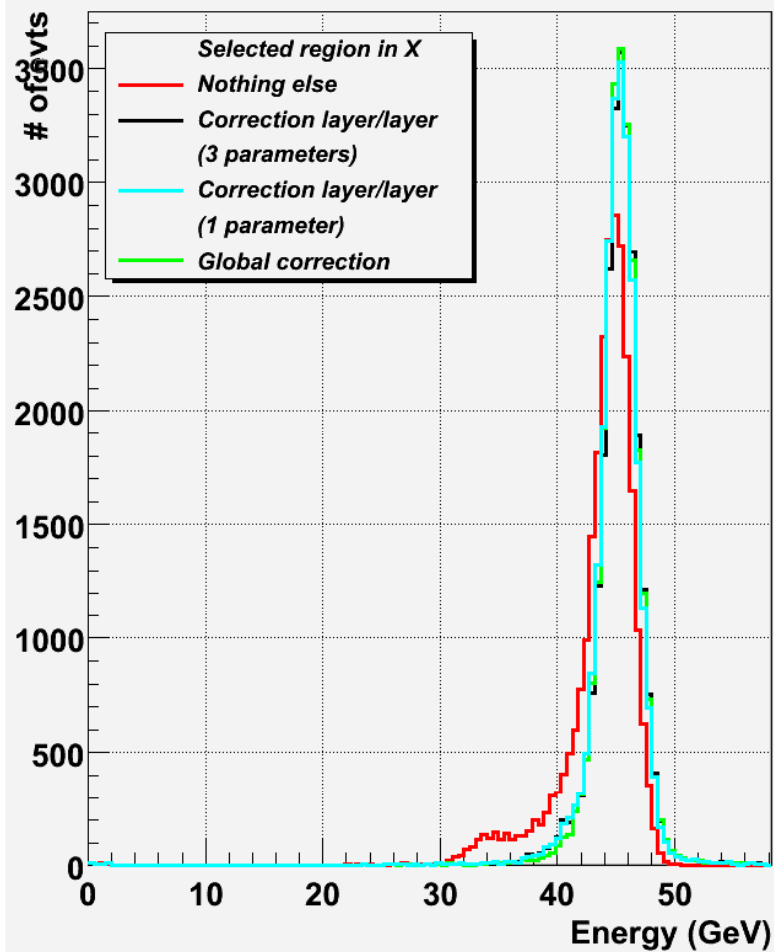


Comparisons: 45 GeV, 30 GeV and 15 GeV (layer/layer)


RUN300195 (45 GeV)

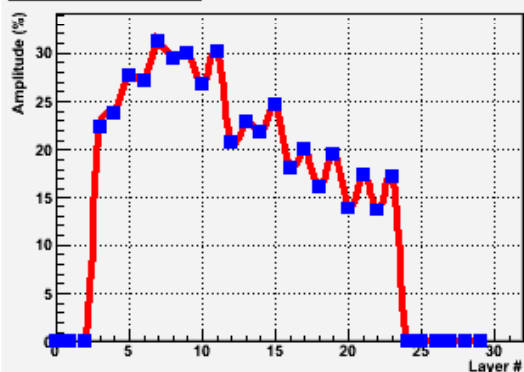


RUN300207 (30 GeV)

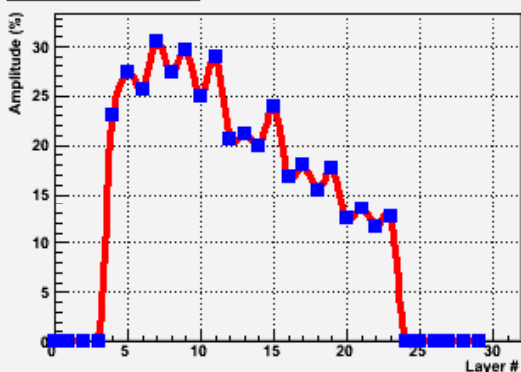


RUN300202 (15 GeV)

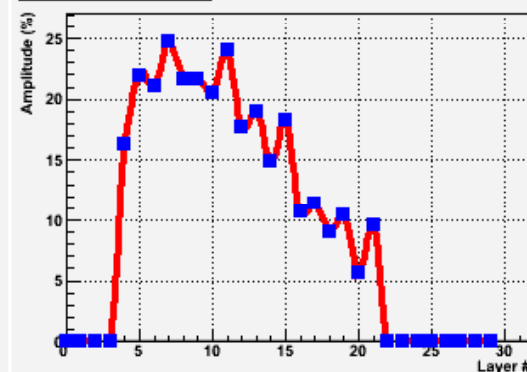


RUN300195 (45 GeV)

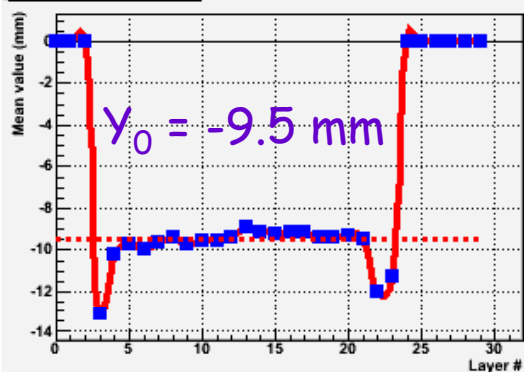


RUN300207 (30 GeV)

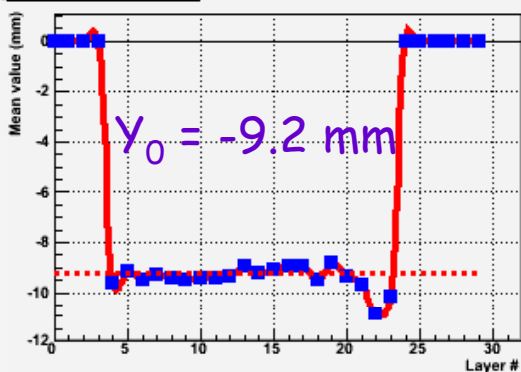


RUN300202 (15 GeV)

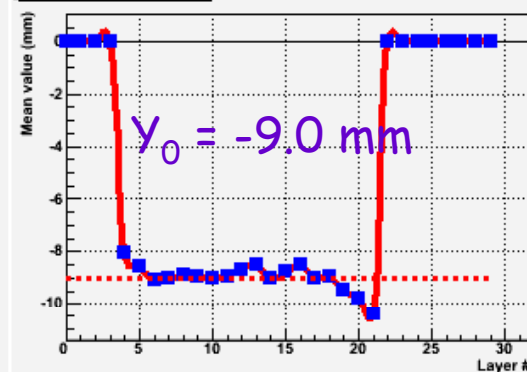


RUN300195 (45 GeV)

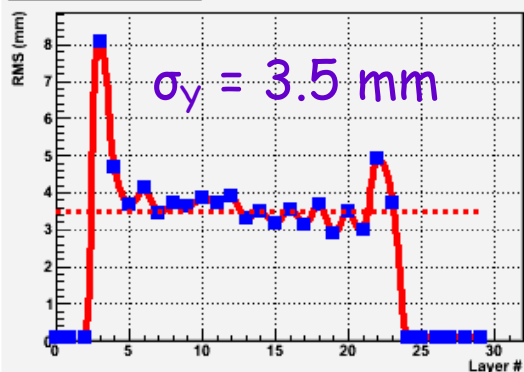







RUN300207 (30 GeV)

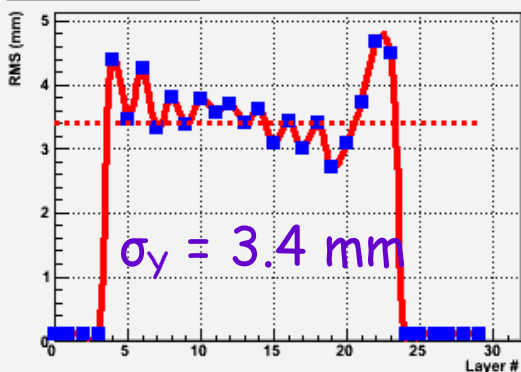



RUN300202 (15 GeV)

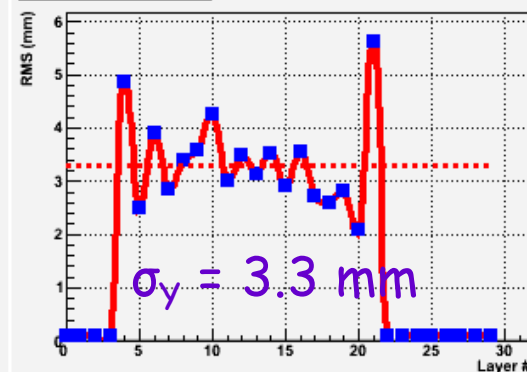

Results: 45 GeV, 30 GeV and 15 GeV (selected region in X)

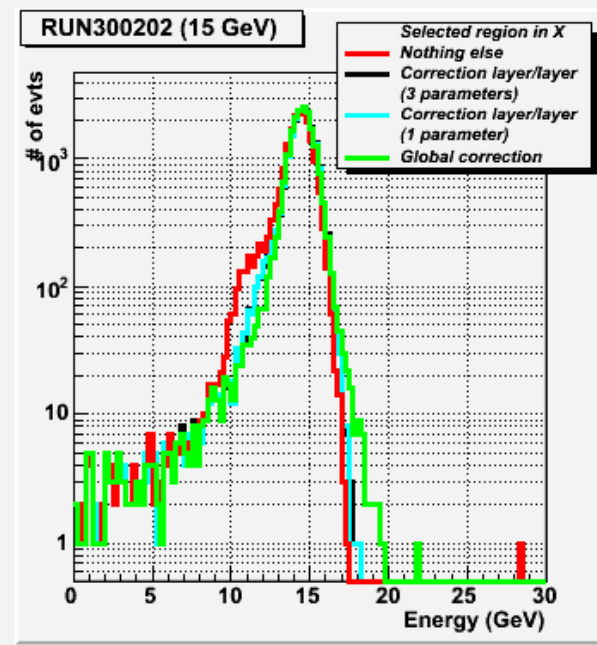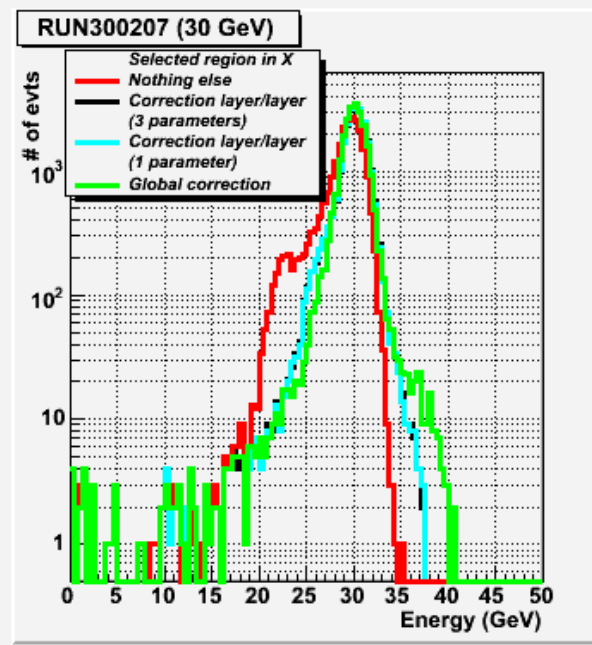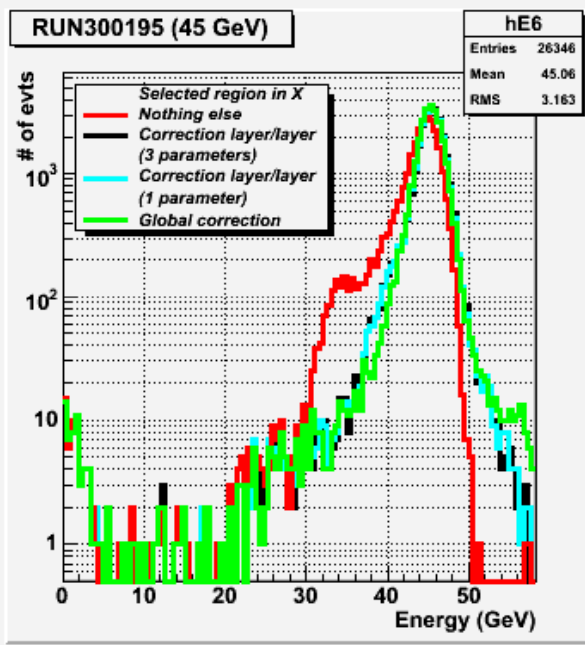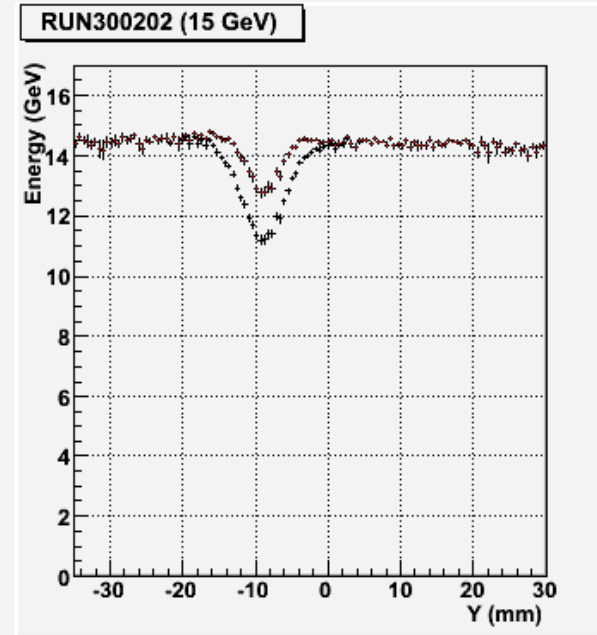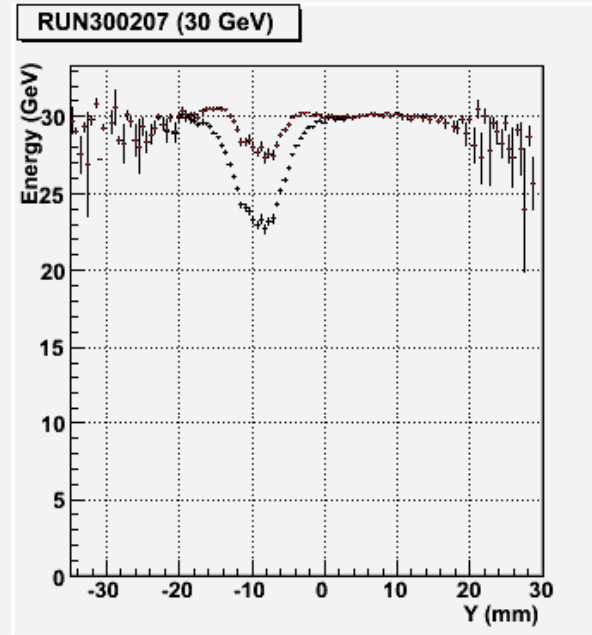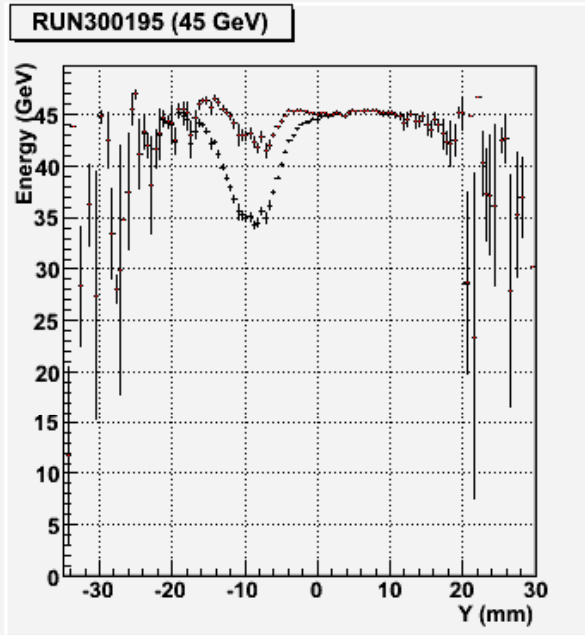

Correction in X (\Rightarrow selected region in Y)

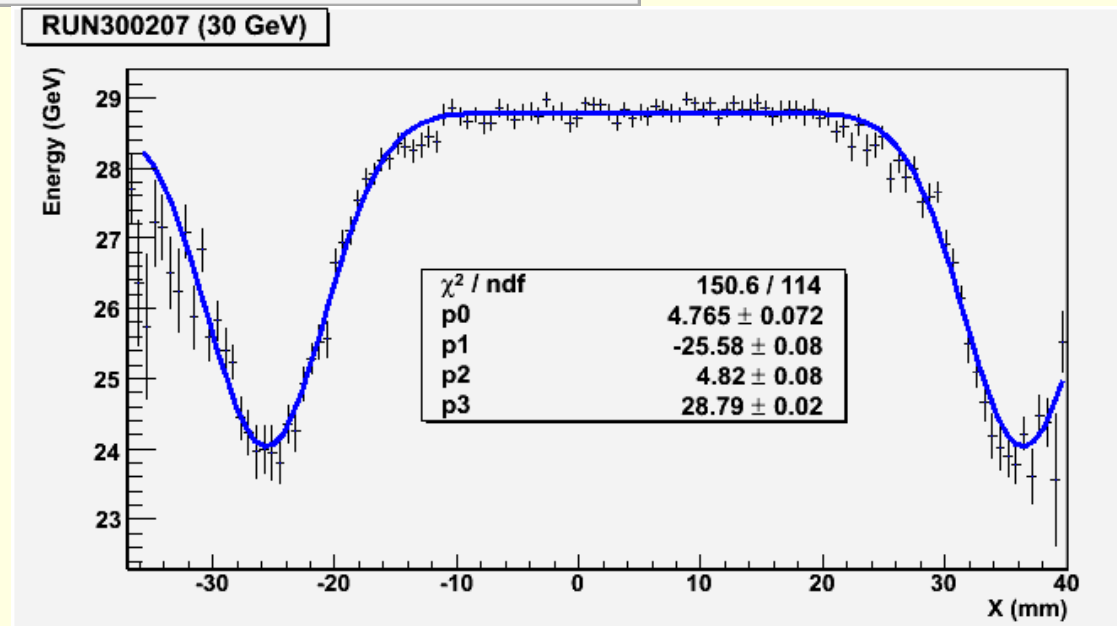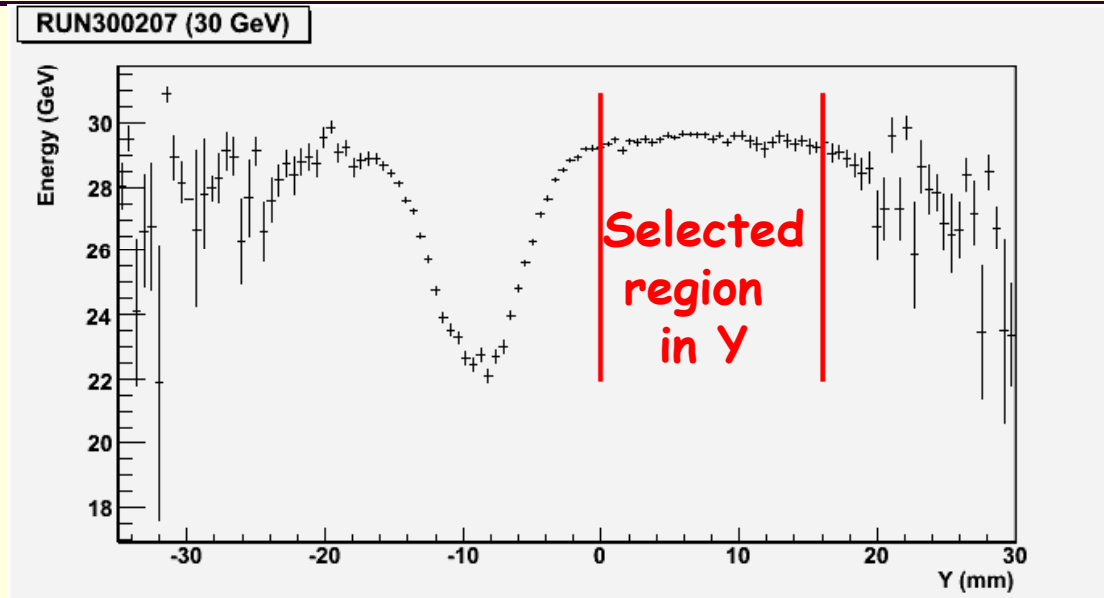


Fit :

Plateau – Gaussian_1 – Gaussian_2

$$[3] - [0] \cdot \left(e^{-\frac{(Y-[1])^2}{2 \cdot [2]^2}} + e^{-\frac{(Y - ([1] + 62 \text{mm}))^2}{2 \cdot [2]^2}} \right)$$


(\Rightarrow 4 parameters)

Layer per layer correction in X (4 parameters)

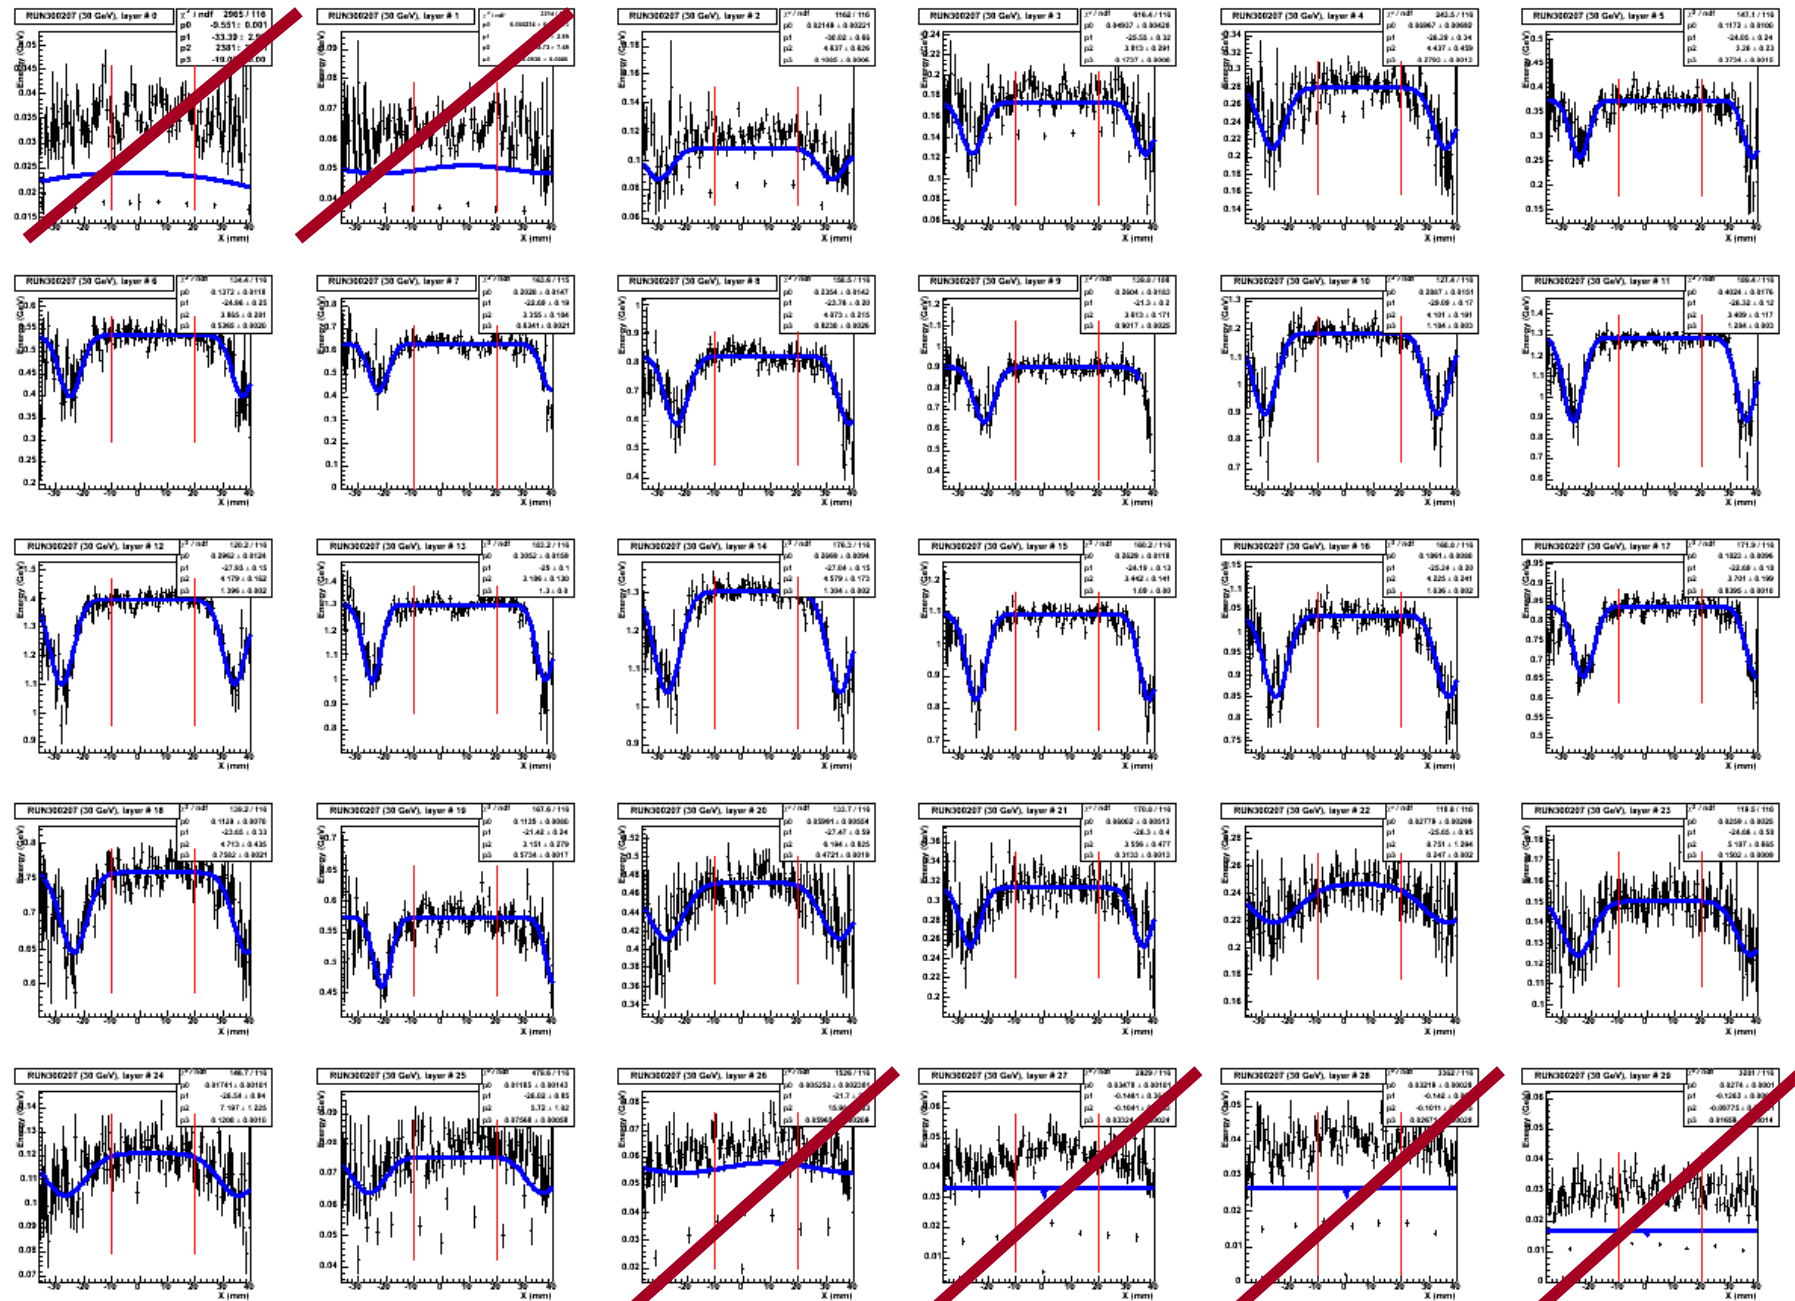


Remarks:


RUN300207 (30 GeV)

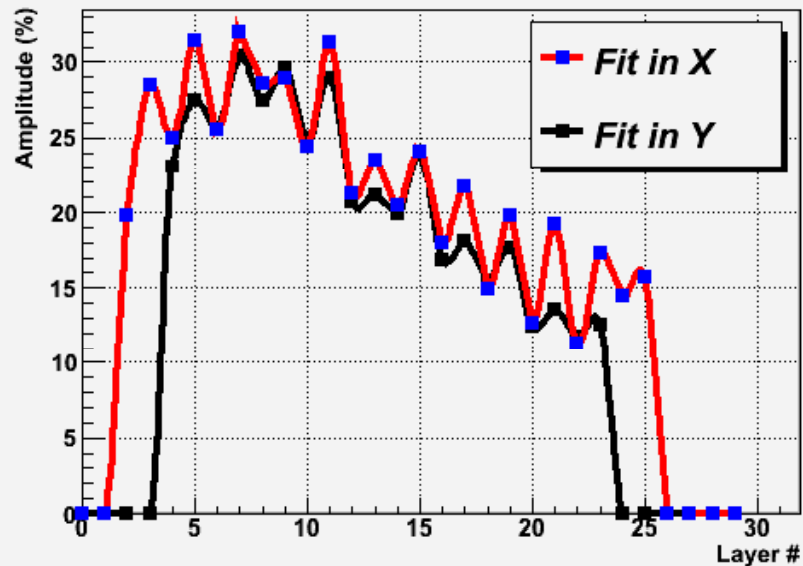

RUN300207 (30 GeV)

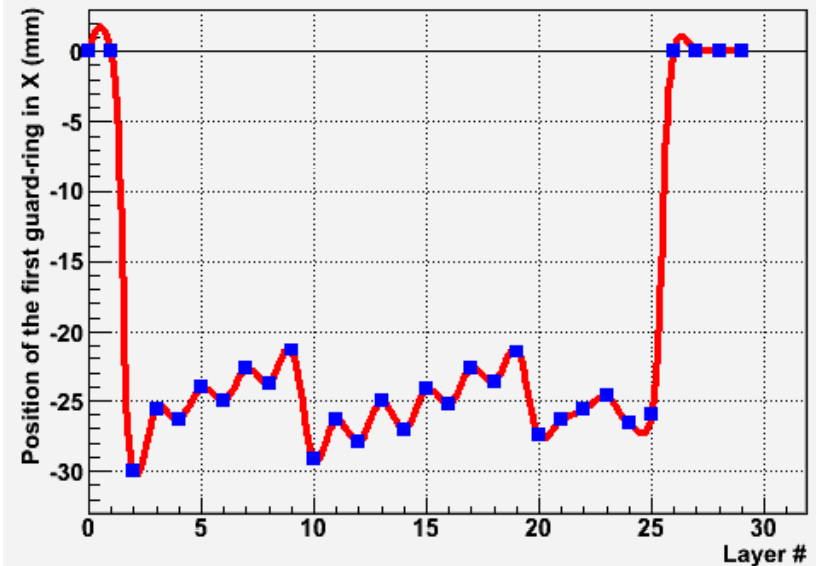


RUN300207 (30 GeV)

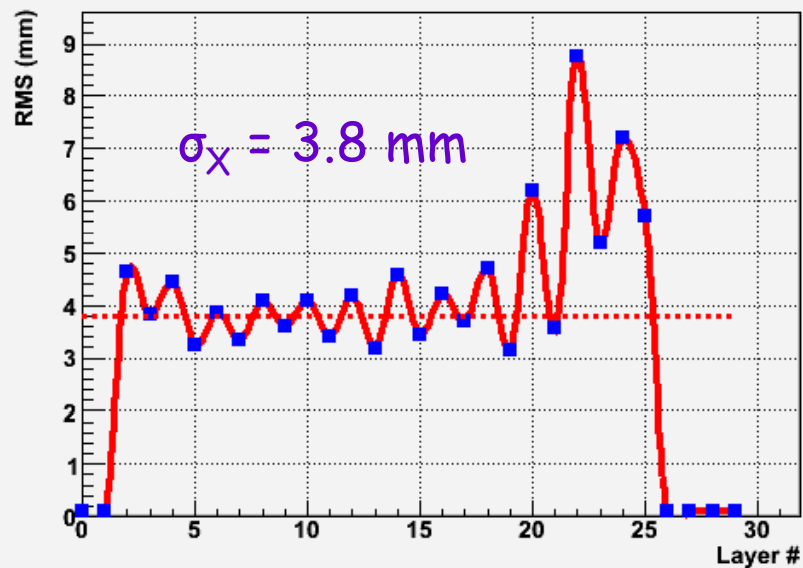

$\sigma_x = 3.8 \text{ mm}$ but $\sigma_x = 3.4$ leads to good fits \rightarrow


Layer per layer correction in X (2 parameters)

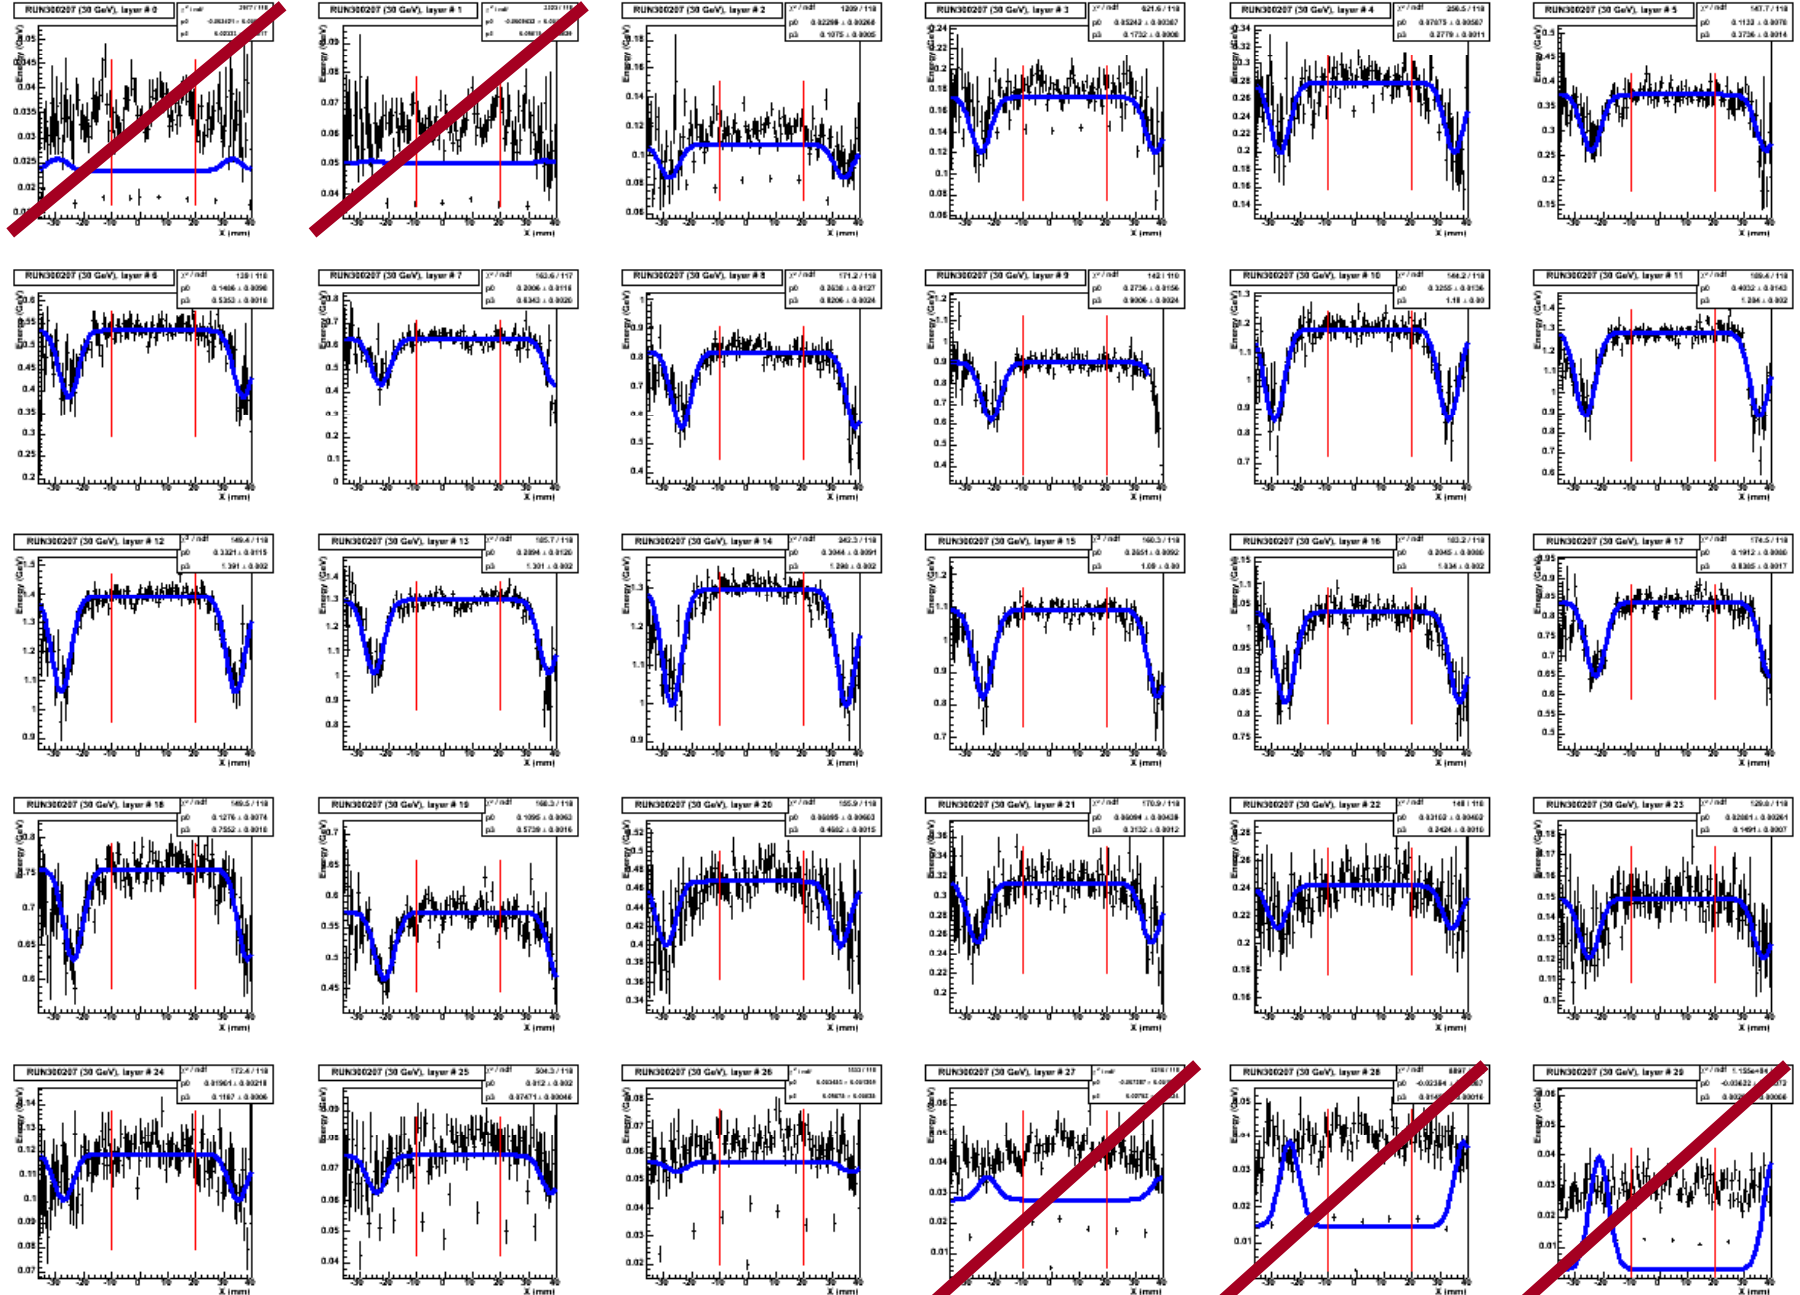


Profiles (corrections in Y and X)

(1) from para. obtained in Y; (2) from para. obtained in X


RUN300207 (30 GeV)

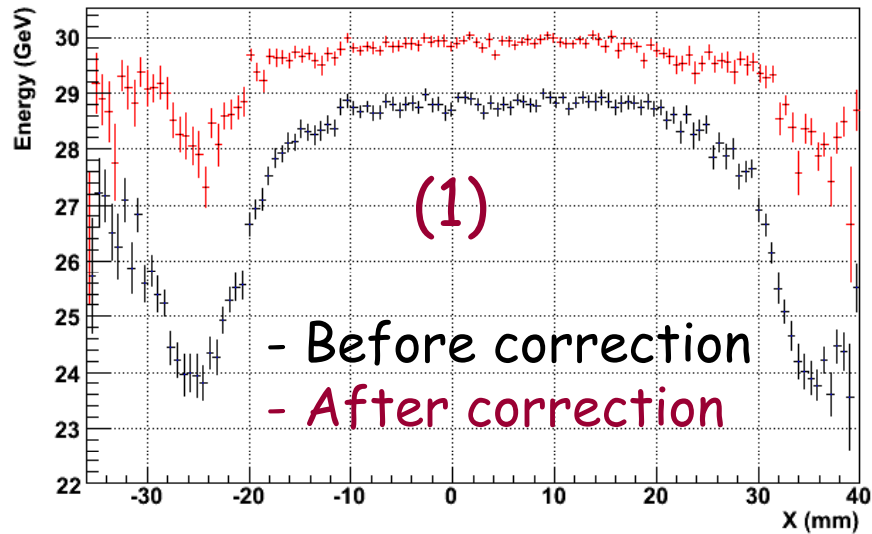


RUN300207 (30 GeV)

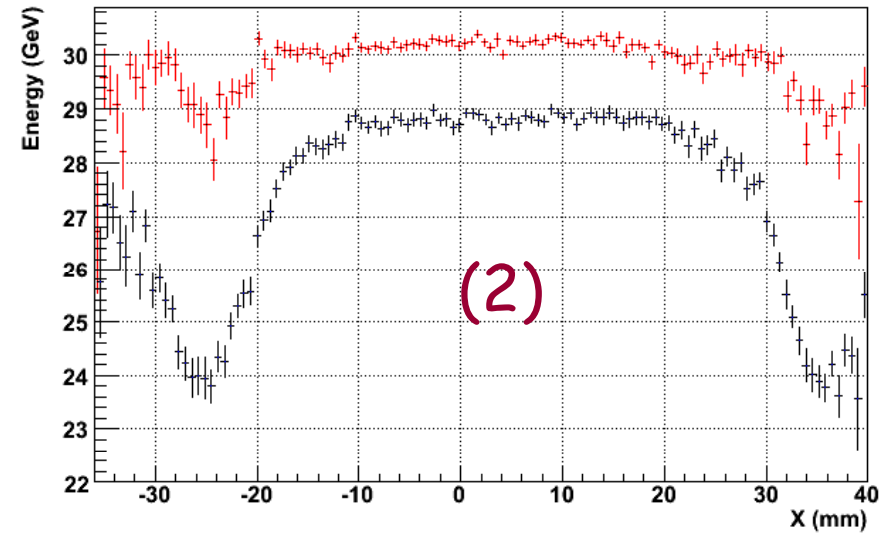

RUN300207 (30 GeV)


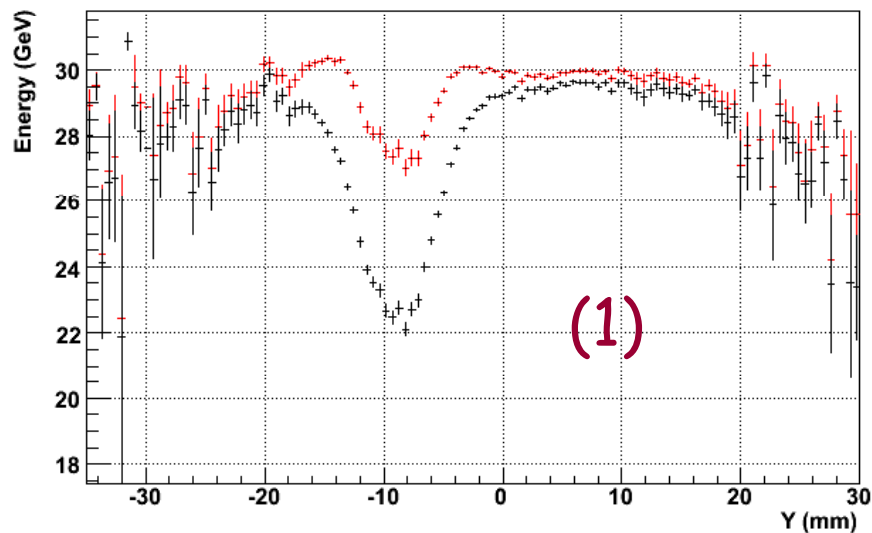


RUN300207 (30 GeV)


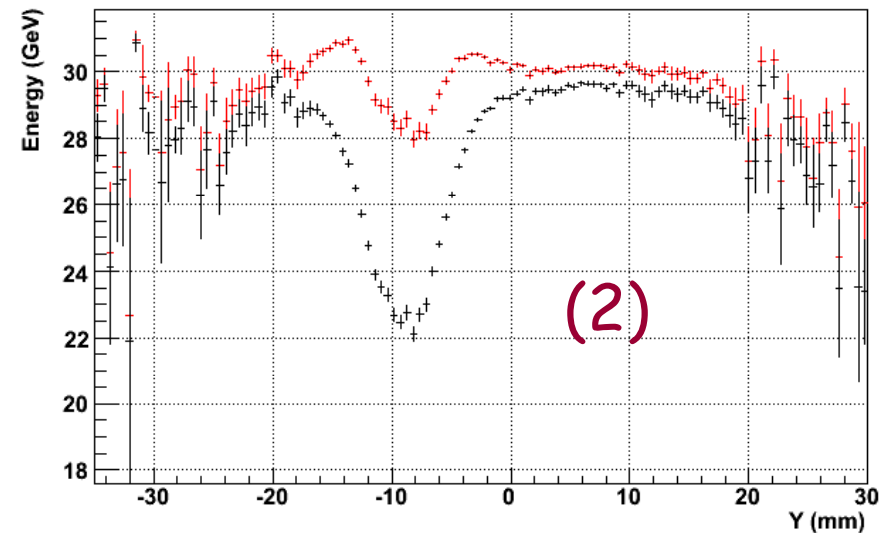


Distributions in energy (corrections in Y and X)








(1) from para. obtained in Y; (2) from para. obtained in X

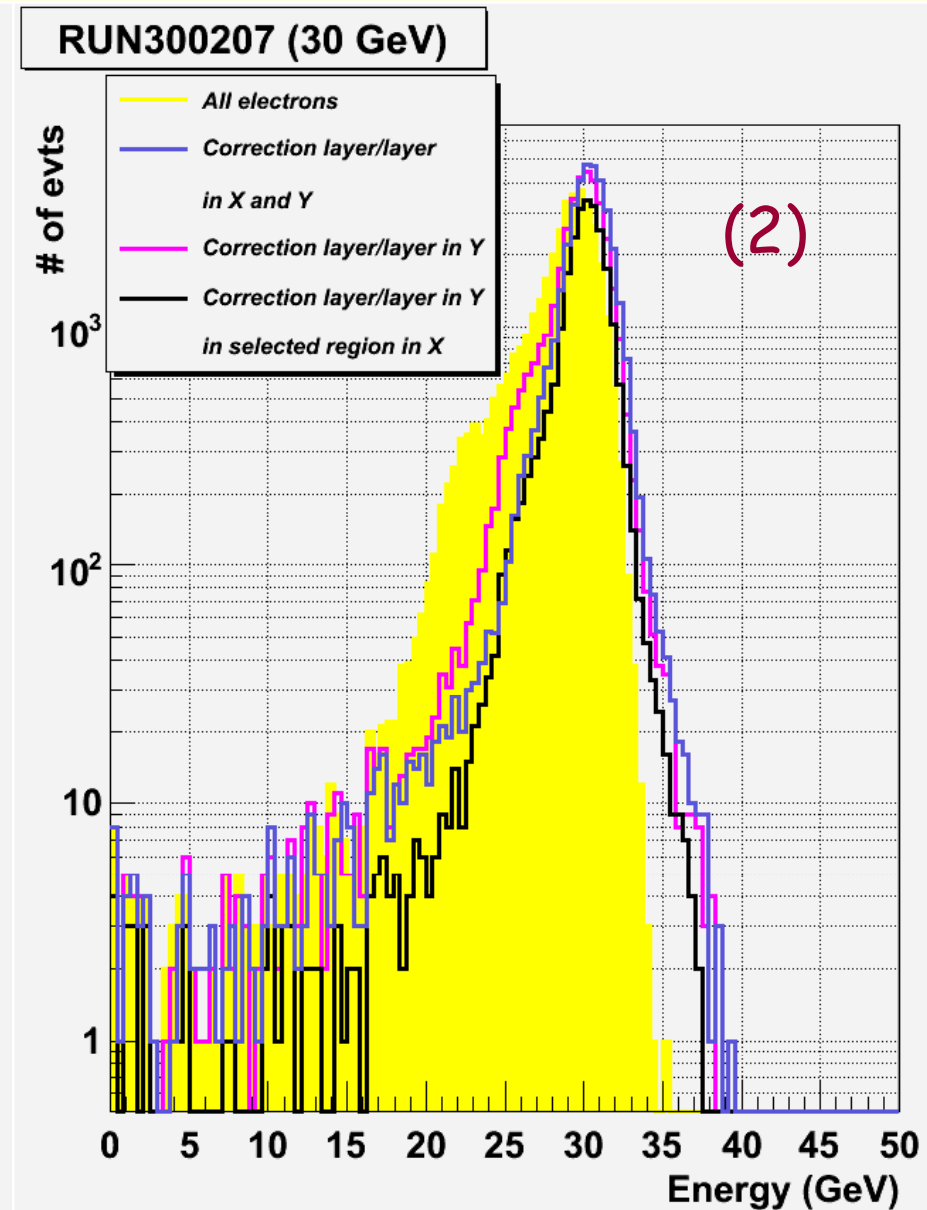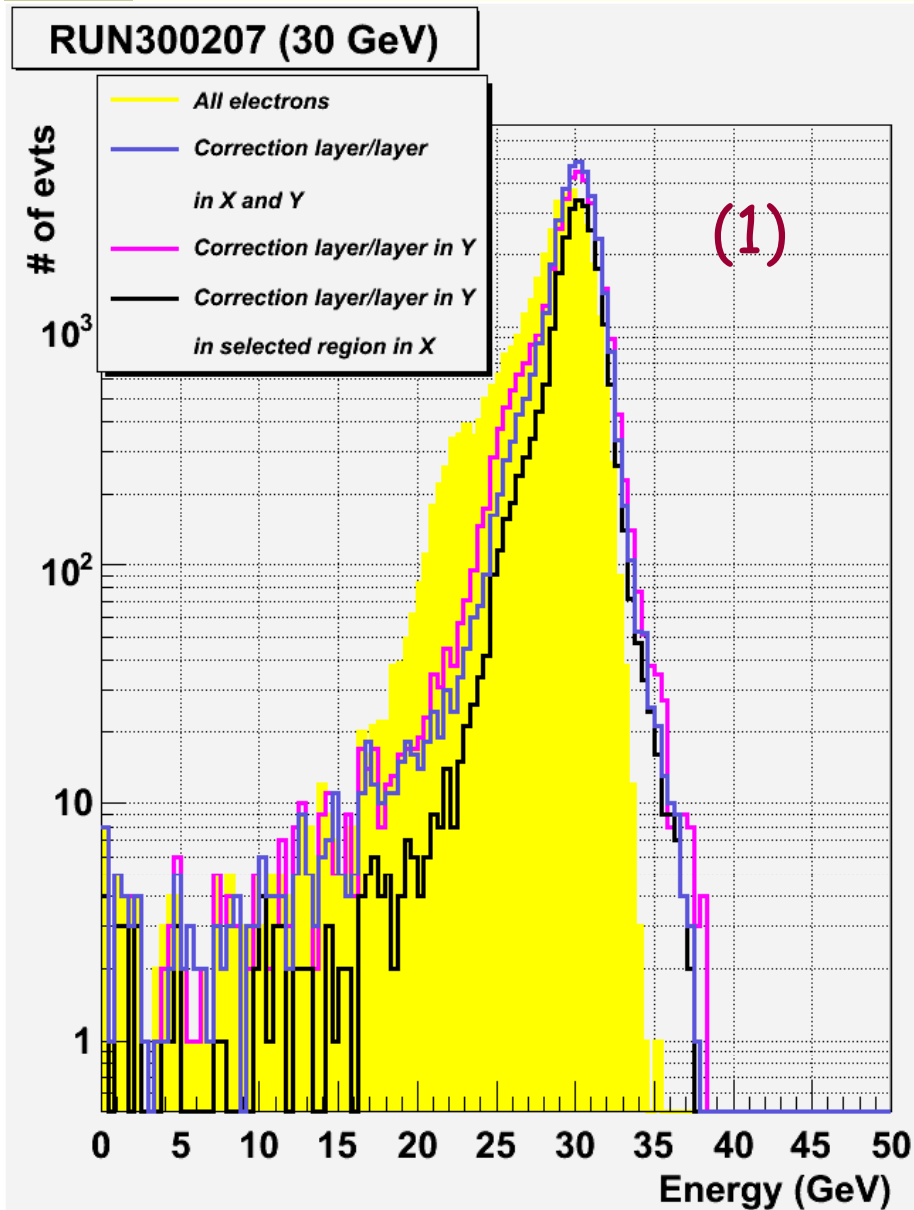

Comparison with simulations

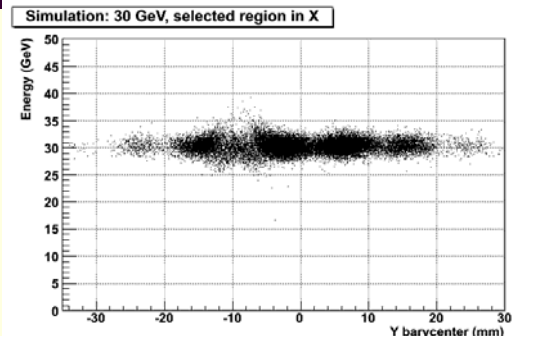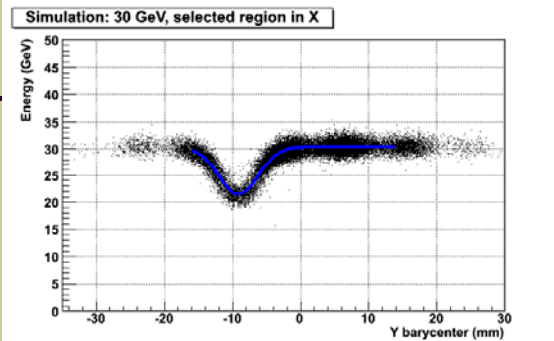


Data/Simulation, 30 GeV

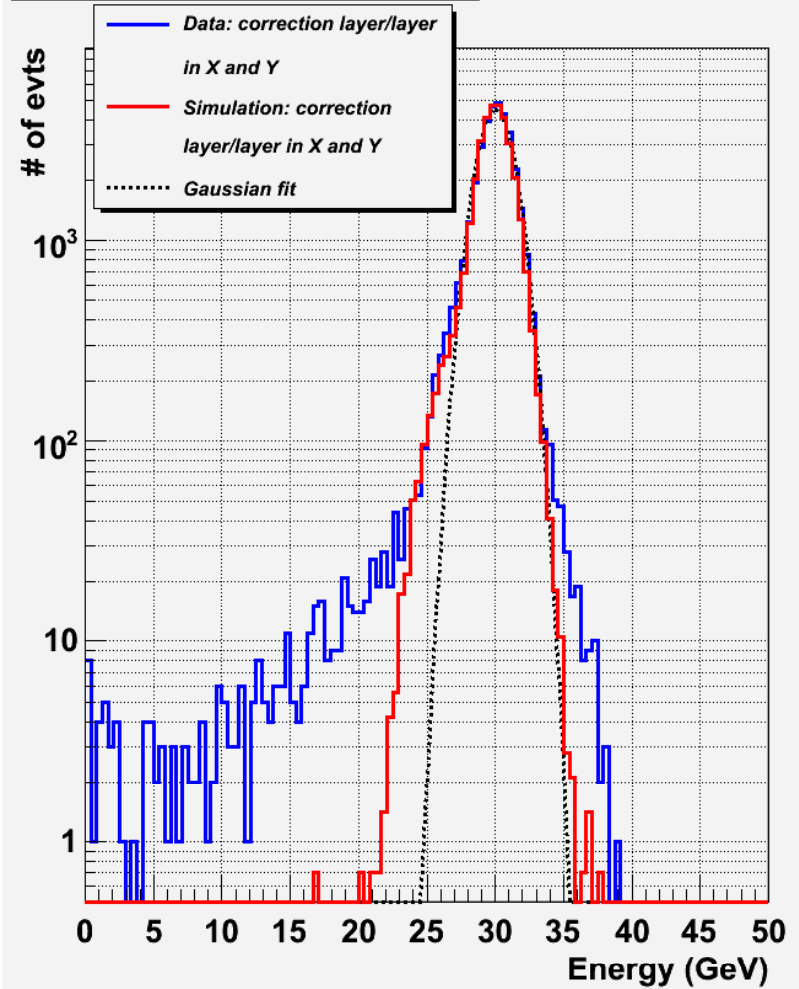


Other methods: 1. virtual cells

- o In order to estimate the energy lost in the inter-wafer gaps virtual cells are added
- o The virtual cell energy is calculated from the interpolation of the deposited energies in the 2 closest cells:

$$E_{virtual} = K \cdot (E_{i-1} + E_{i+1})$$

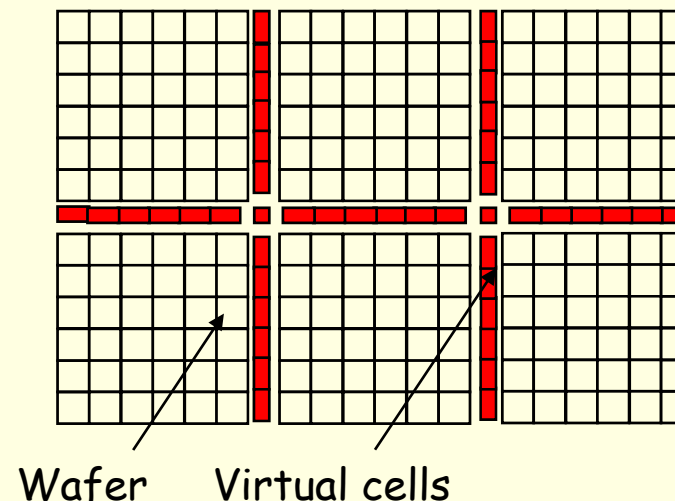

Simulation: 45 GeV e^-

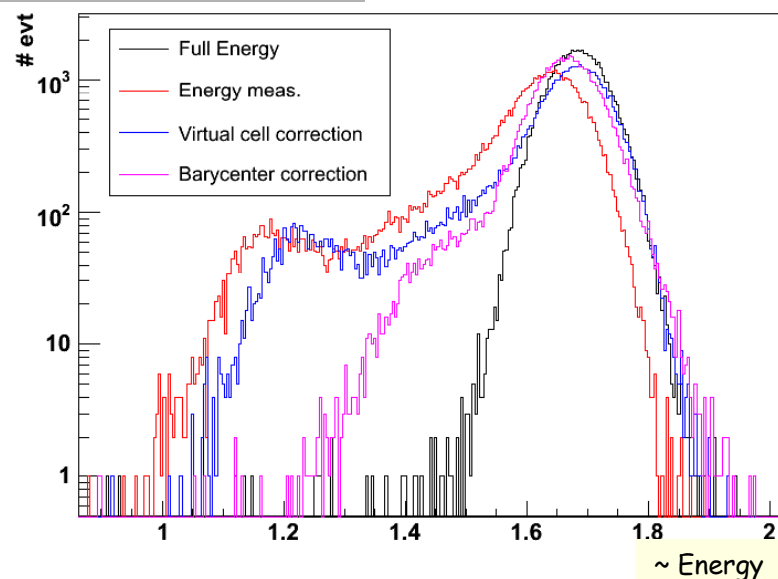


- o This method is quite simple, it leads to an energy resolution improvement but do not really or sufficiently correct the gap problem

Virtual cell method

o Actually the value of the factor K depends on the shower barycenter in each layer and therefore this method loses one of its big advantage


$$E_{virtual} = K(X_b, Y_b) \cdot (E_{i-1} + E_{i+1})$$

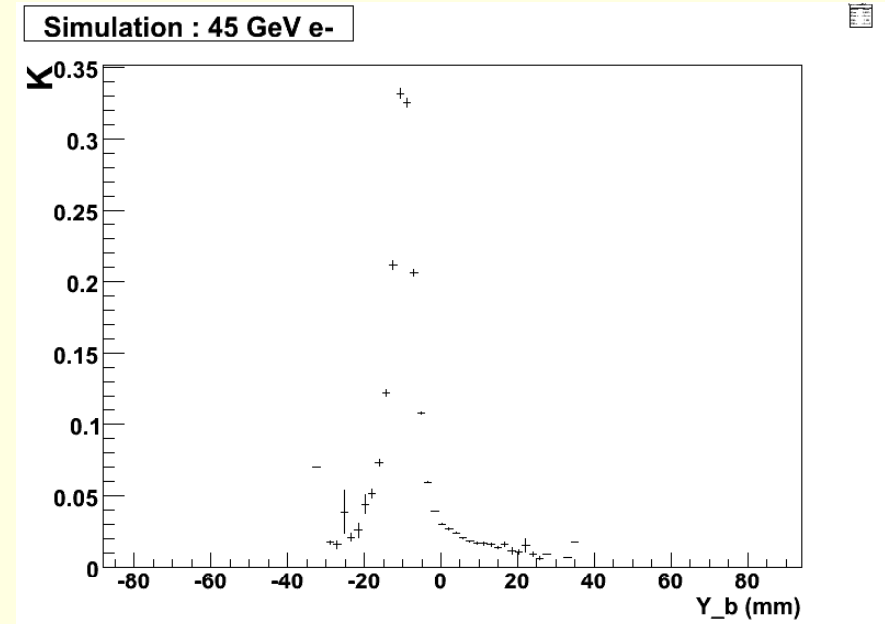

But what happens if the pad size changes :
i.e. 1 cm x 1cm \rightarrow 5 mm x 5 mm
?

2. Spline interpolation method


- o A spline is an interpolation defined piecewise by polynomials
- o A spline (actually, third spline polynomial term) has been used to make interpolation with each row and each column of cells

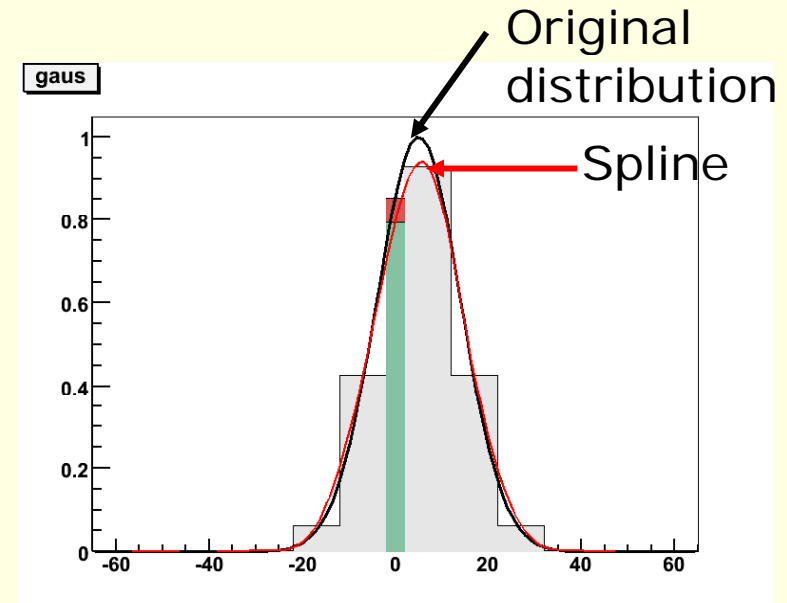

Interpolation of a gaussian distribution by a spline

- o Again the energy resolution is improved, but the tail at low energy is not well corrected
- o It gives results close to what was obtained with the virtual cell method

Run300195: 45 GeV e^-

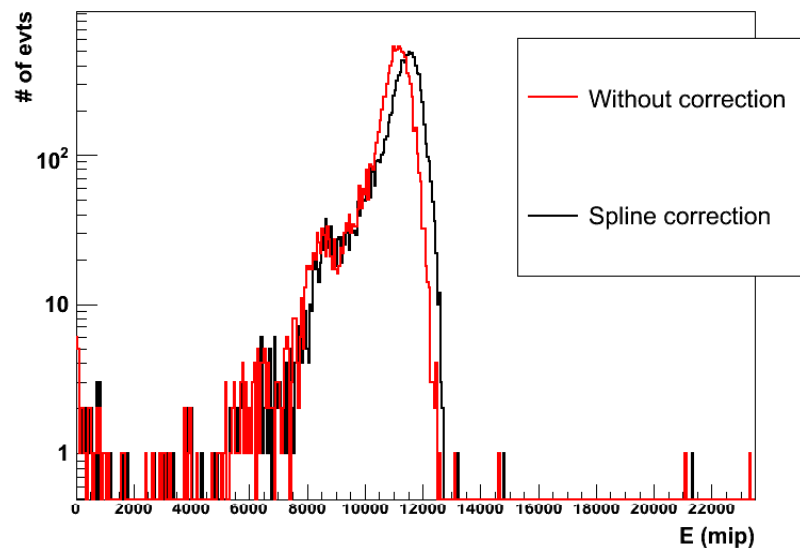

Conclusion

Effect of the guard rings can be corrected thanks to a correction method using the barycenter calculated layer per layer. But this technique requires lots of parameters and is a little « heavy »

Other simpler methods have been tested, but for the time being, they does not lead to a good improvement for 1 cm x 1 cm pads

MOKKA with 5 mm x 5mm pads is needed in order to test these methods in a more realistic case