

EUDET beam telescope

ILC Vertex Workshop
Villa Vigoni - Menaggio

22nd April 2008

Antonio Bulgheroni
INFN – Milano

On behalf of the JRA1 EUDET collaboration





- Introduction to EURECA
- Pixel beam telescope
 - Overall description
 - DAQ hardware / software
 - Analysis and reconstruction software
 - Summary of the test beam results
 - Future
- Conclusion



- EU funded program supporting ILC detector R&D in Europe
 - EUDET:
 - **Is not a detector R&D programme in its narrower sense.** It provides a framework for ILC detector R&D with larger prototypes
 - **Does not cover all future needs (both financial and personnel).** Additional resources required to exploit EUDET infrastructures.
 - **Is not a closed club.** Other institutes (European & non-European) are invited to contribute and exploit the developed infrastructures.



EUDET partners



**Charles University Prague
IPASCR Prague**



HIP Helsinki

**LPC Clermont-Ferrand
LPSC Grenoble**



**LPHNE Paris
Ecole Polytechnique Palaiseau
LAL Orsay
IReS Strasbourg
CEA Saclay**

DESY



**Bonn University
Freiburg University
Hamburg University
Mannheim University
MPI Munich
Rostock University**



Tel Aviv University



**INFN Ferrara
INFN Milan
INFN Pavia
INFN Rome**



NIKHEF Amsterdam



**AGH Cracow
INPPAS Cracow**



CSIC Santander



Lund University



**CERN Geneva
Geneva University**



**Bristol University
UCL London**

+ 22 associated institutes

EUDET map




- **EUDET partners**
- **EUDET associates**

- Novosibirsk
- Protvino
- ITEP
- MPHI
- MSU
- Obninsk
- KEK (Japan)





- Three pillars: **Networking Activities, Transnational Access and Joint Research Activities**

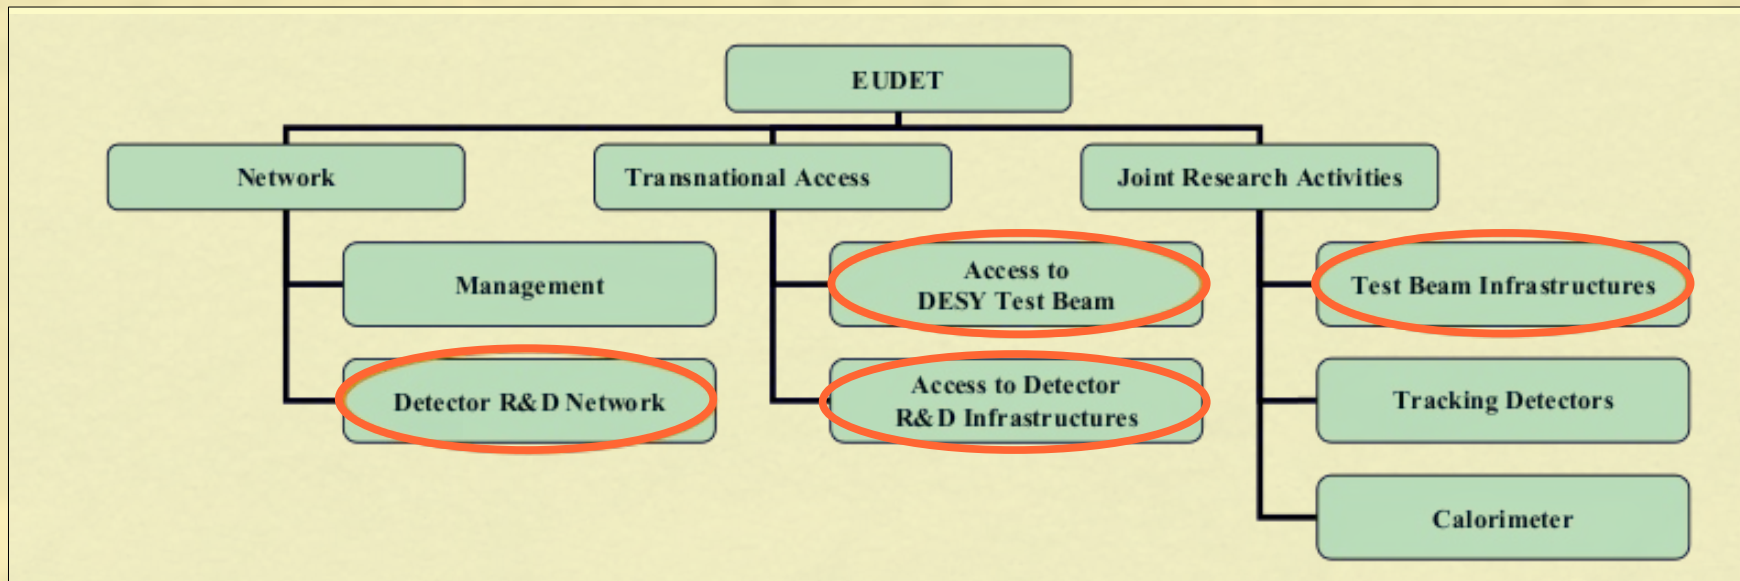


- NA2:** Common software framework for TB and simulations, Common DAQ, deep-sub μ electronics (CERN).
- TA1:** Using the DESY test beam area.
- TA2:** Access to the EUDET infrastructures (like the beam telescope)
- JRA1:** Large bore magnet and pixel beam telescope

Pixel beam telescope



Two phases:


- 1st with analog sensors and sparsification @ the DAQ level (demonstrator)
- 2nd digital sensors with binary output and higher frame rate

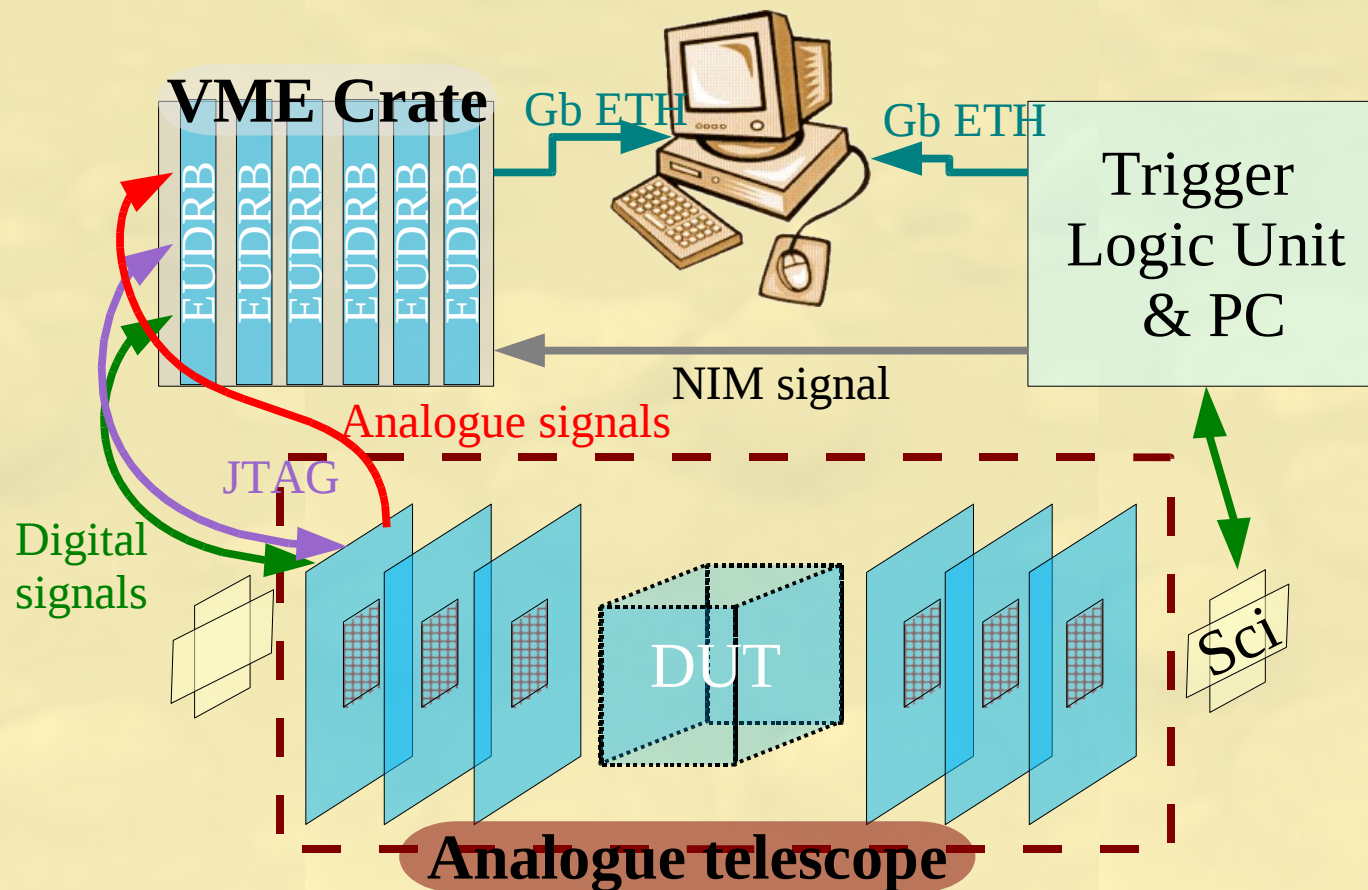

Looking closer at the demonstrator




- MAPS sensor with SB structure
- 65k pixels with 30 um pitch
- Four parallel output channels
- Clock < 20 MHz

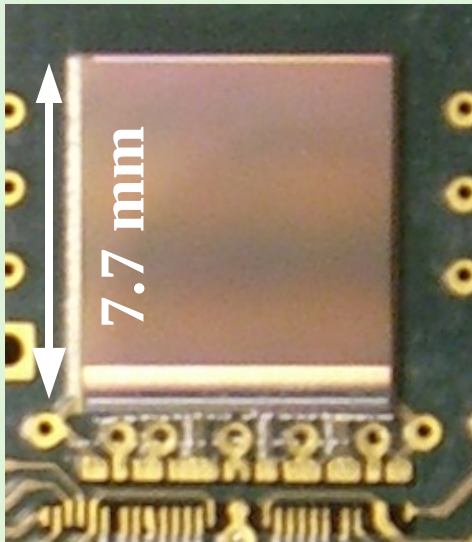


MimoTel

- VME 64x and USB2.0 DAQ board
- 1 board for each detector plane
- Two acquisition modalities:
 - RAW mode
 - **ZS mode**

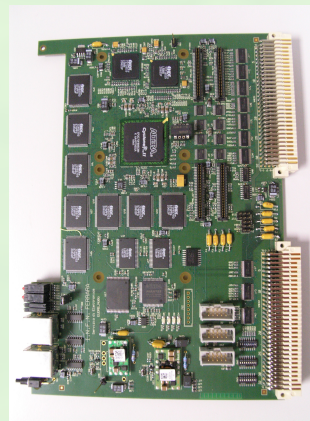


EUDRB

- TLU used to synchronize all the telescope boards
- The DUT receive the trigger signal and the trigger number from the TLU
- Replacement of a NIM crate and modules!

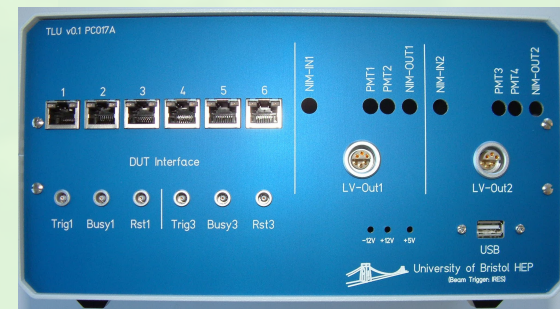

TLU


Alive and kicking!

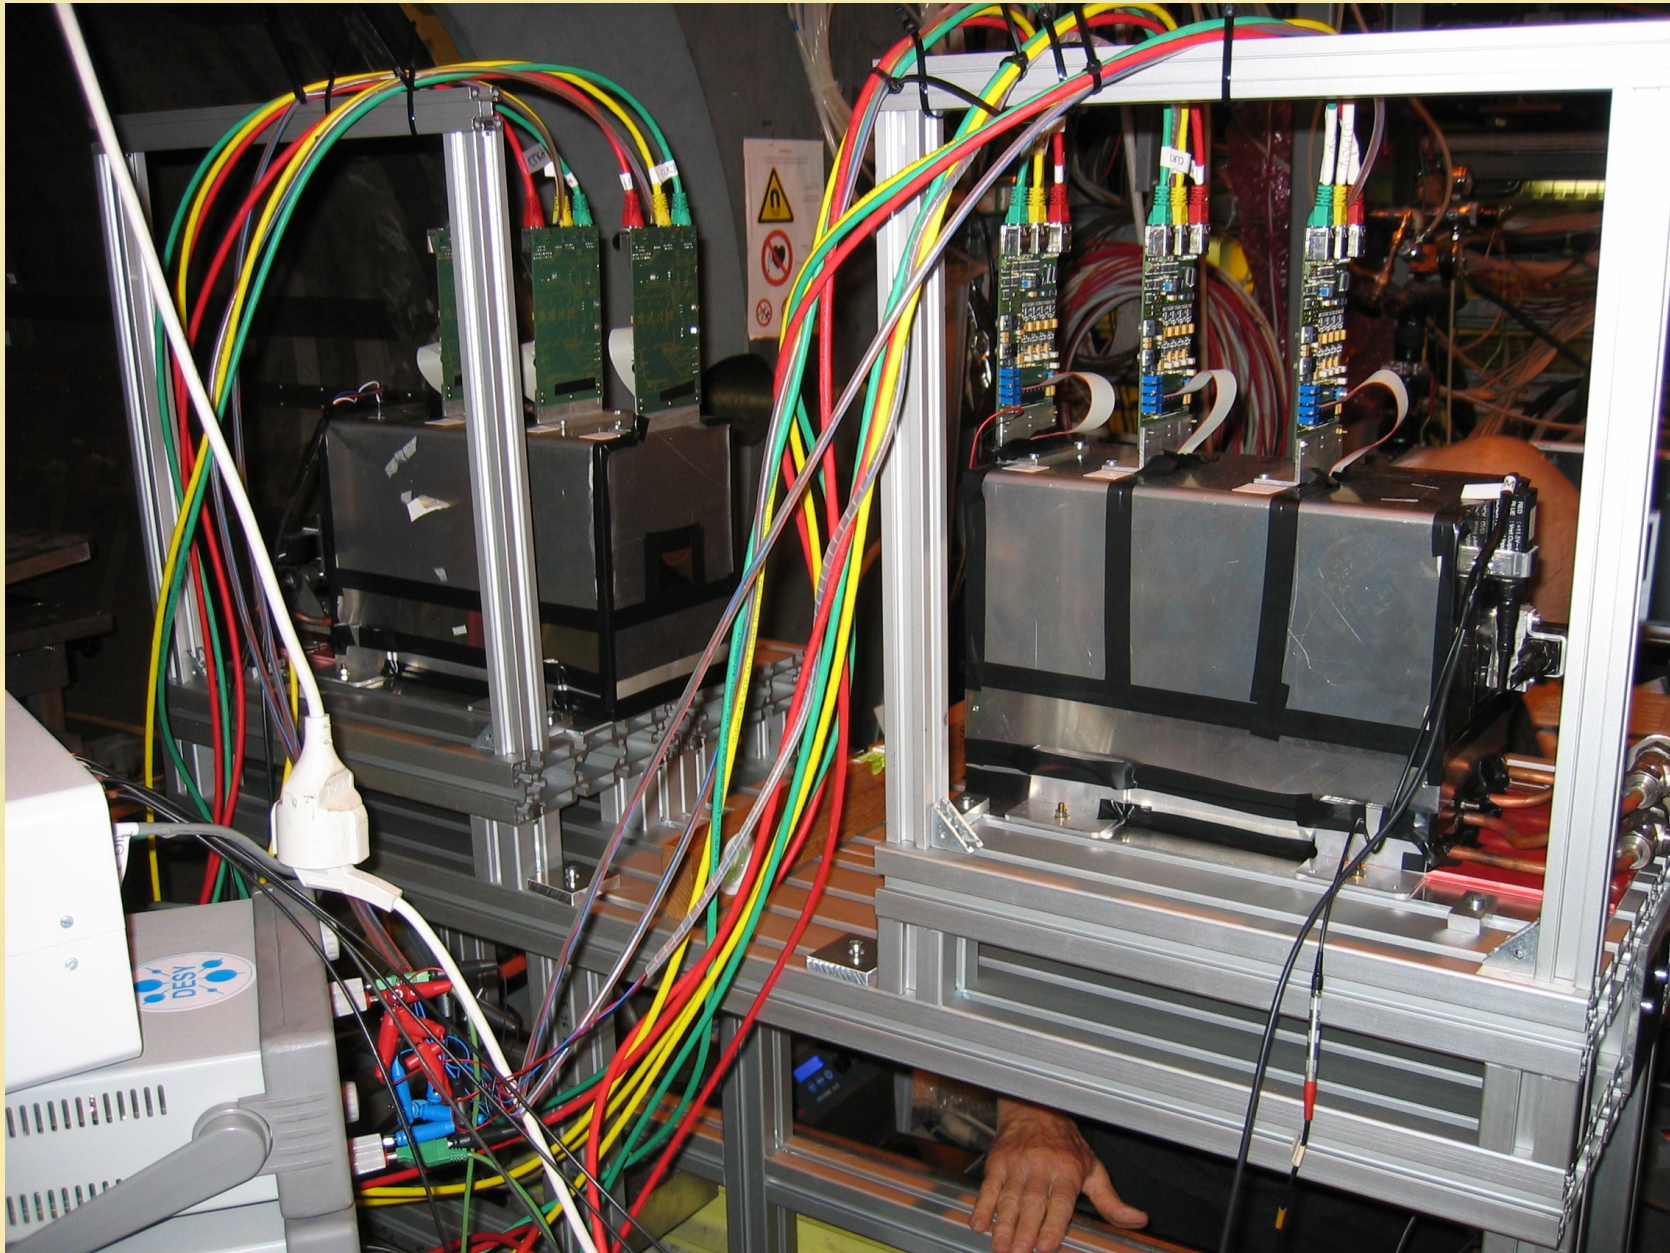

A closer look to the DAQ: hardware-wise




- EUDRB: EUDET Data Reduction Board, developed by INFN-Fe (see Angelo's talk)
 - Mother / Daughters approach:
 - Mother equipped with a powerful FPGA takes care of data handling, event building and data transmission.
 - Daughters are detector specific interface cards with eventually ADCs
- Two data transmission protocols:
 - VME 64x for test beam like setups and multiboard synchronization
 - USB2.0 for table top experiments and debug

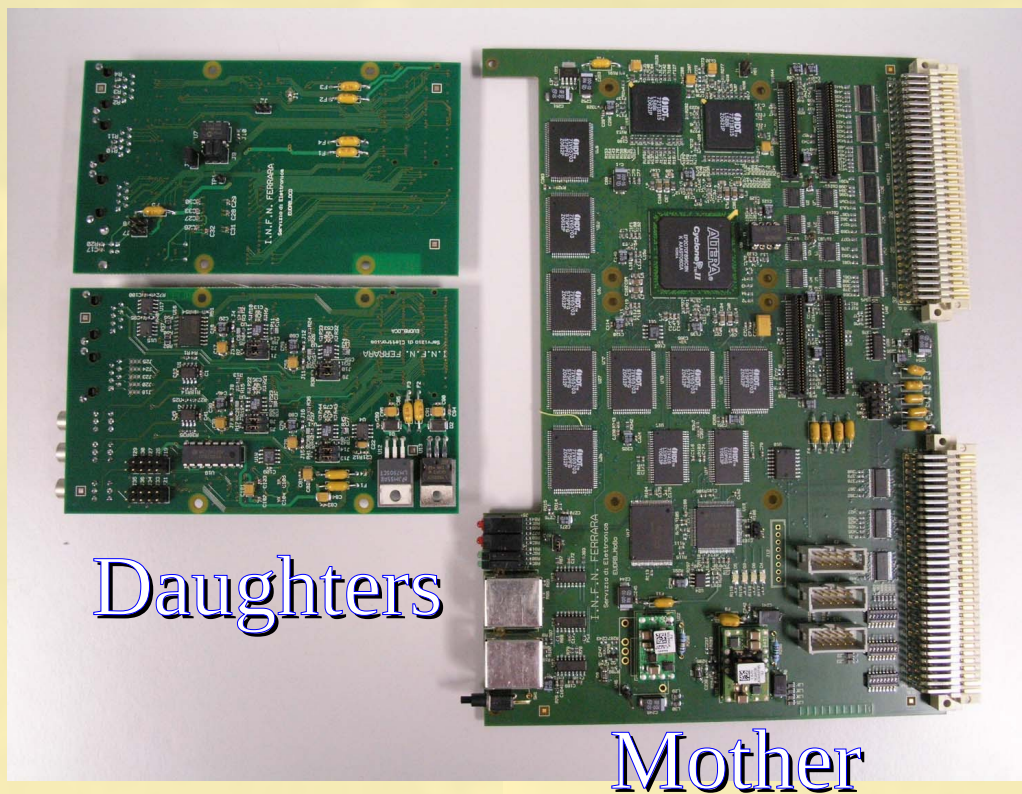



It's a very modern piece of code exploiting all the bleeding edge features now available:

- Object Oriented C++
- Multi-thread
- Distributed (TCP/IP)
- Highly modular

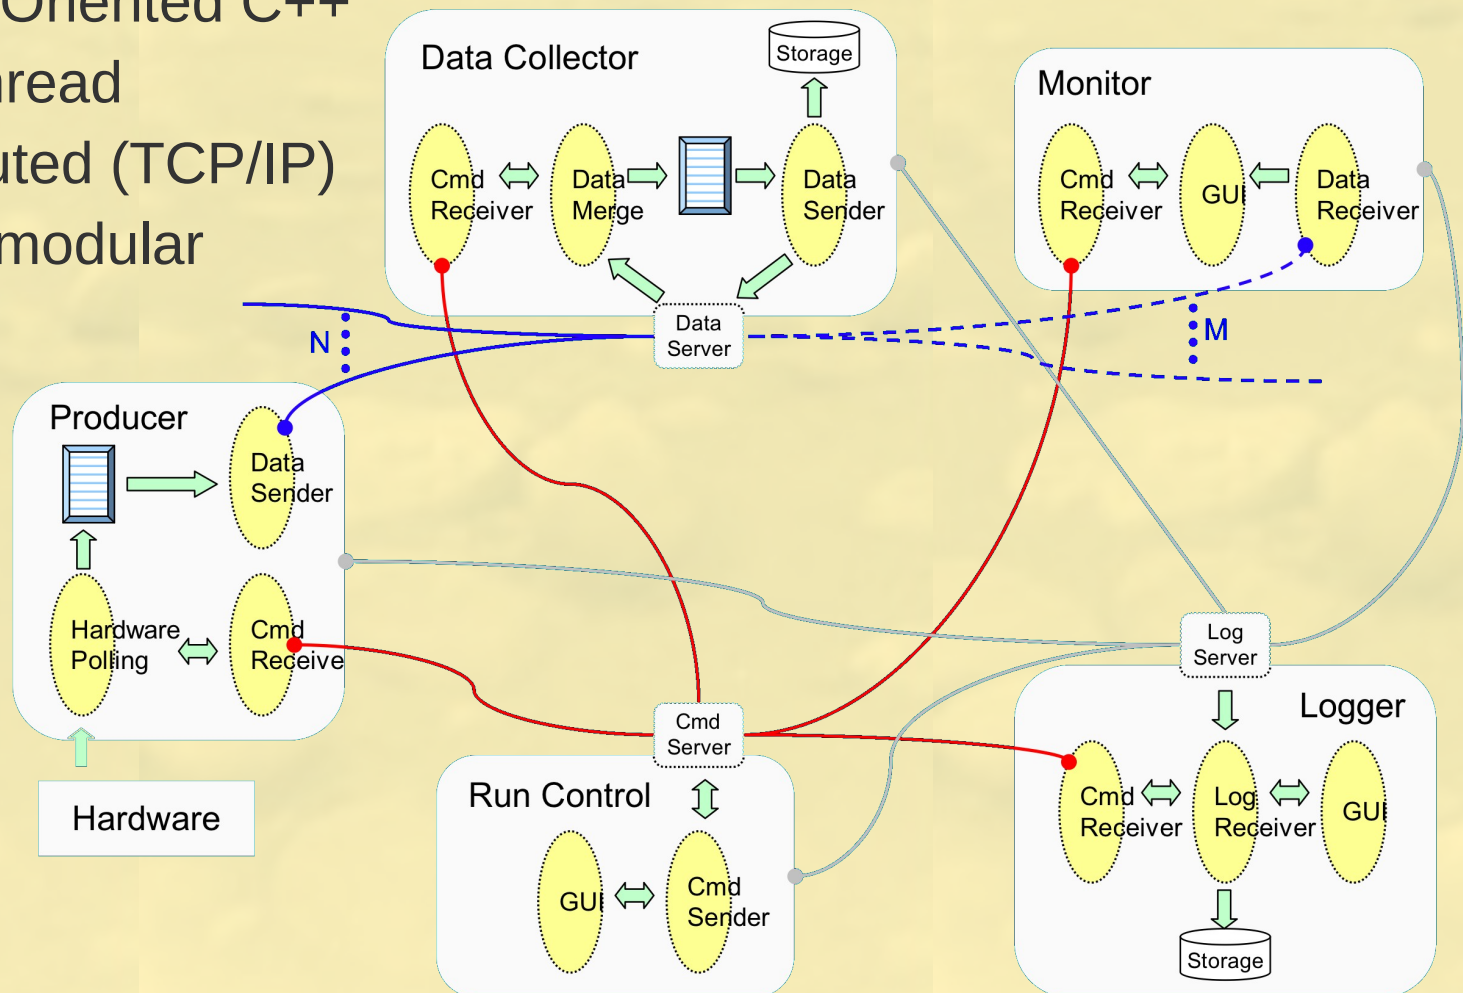




A world about the analysis software: EUTelescope

- Developed within the Software Networking activity, it is based on the official ILC framework: Marlin + LCIO
- EUTelescope is a set of Processors taking to care to handle the data stream from the DAQ to the reconstructed tracks
- Sticking to the ILC de-facto standard offers the possibility to easily use the GRID.
 - Calice and our pixel telescope are the first two experiments in the world doing “real” analysis on the GRID

The screenshot shows a Mozilla Firefox browser window displaying the EUTelescope documentation server. The address bar shows the URL <http://www.roma3.infn.it/~bulgheroni/Eut>. The page content includes a navigation menu with tabs for Main Page, Namespaces, Classes, Files, Directories, and Related Pages. The main heading is "EUTelescope" with the version "v00-00-06". The text on the page reads: "Welcome to the EUTelescope documentation server. This is the place where you can find all the explanation and the examples you may need to run the EUTelescope processors within Marlin. If you know already something about this software project, then you can browse the documentation clicking on the button above or putting a keyword in the search field in top right corner of this page. If you feel you don't know enough on the EUTelescope then we encourage you take have a look at the following pages:" followed by a bulleted list of links: Introduction, The preparation steps, The analysis chain, and Download and installation. At the bottom, it says "If those information are not yet enough, consider contact us on the Linear Collider [Forum](#)." and "Generated on Fri Nov 9 12:33:23 2007 by [doxygen](#) 1.5.2". The browser status bar at the bottom shows "Done" and "0 toto".

Analysis and reconstruction software diagram

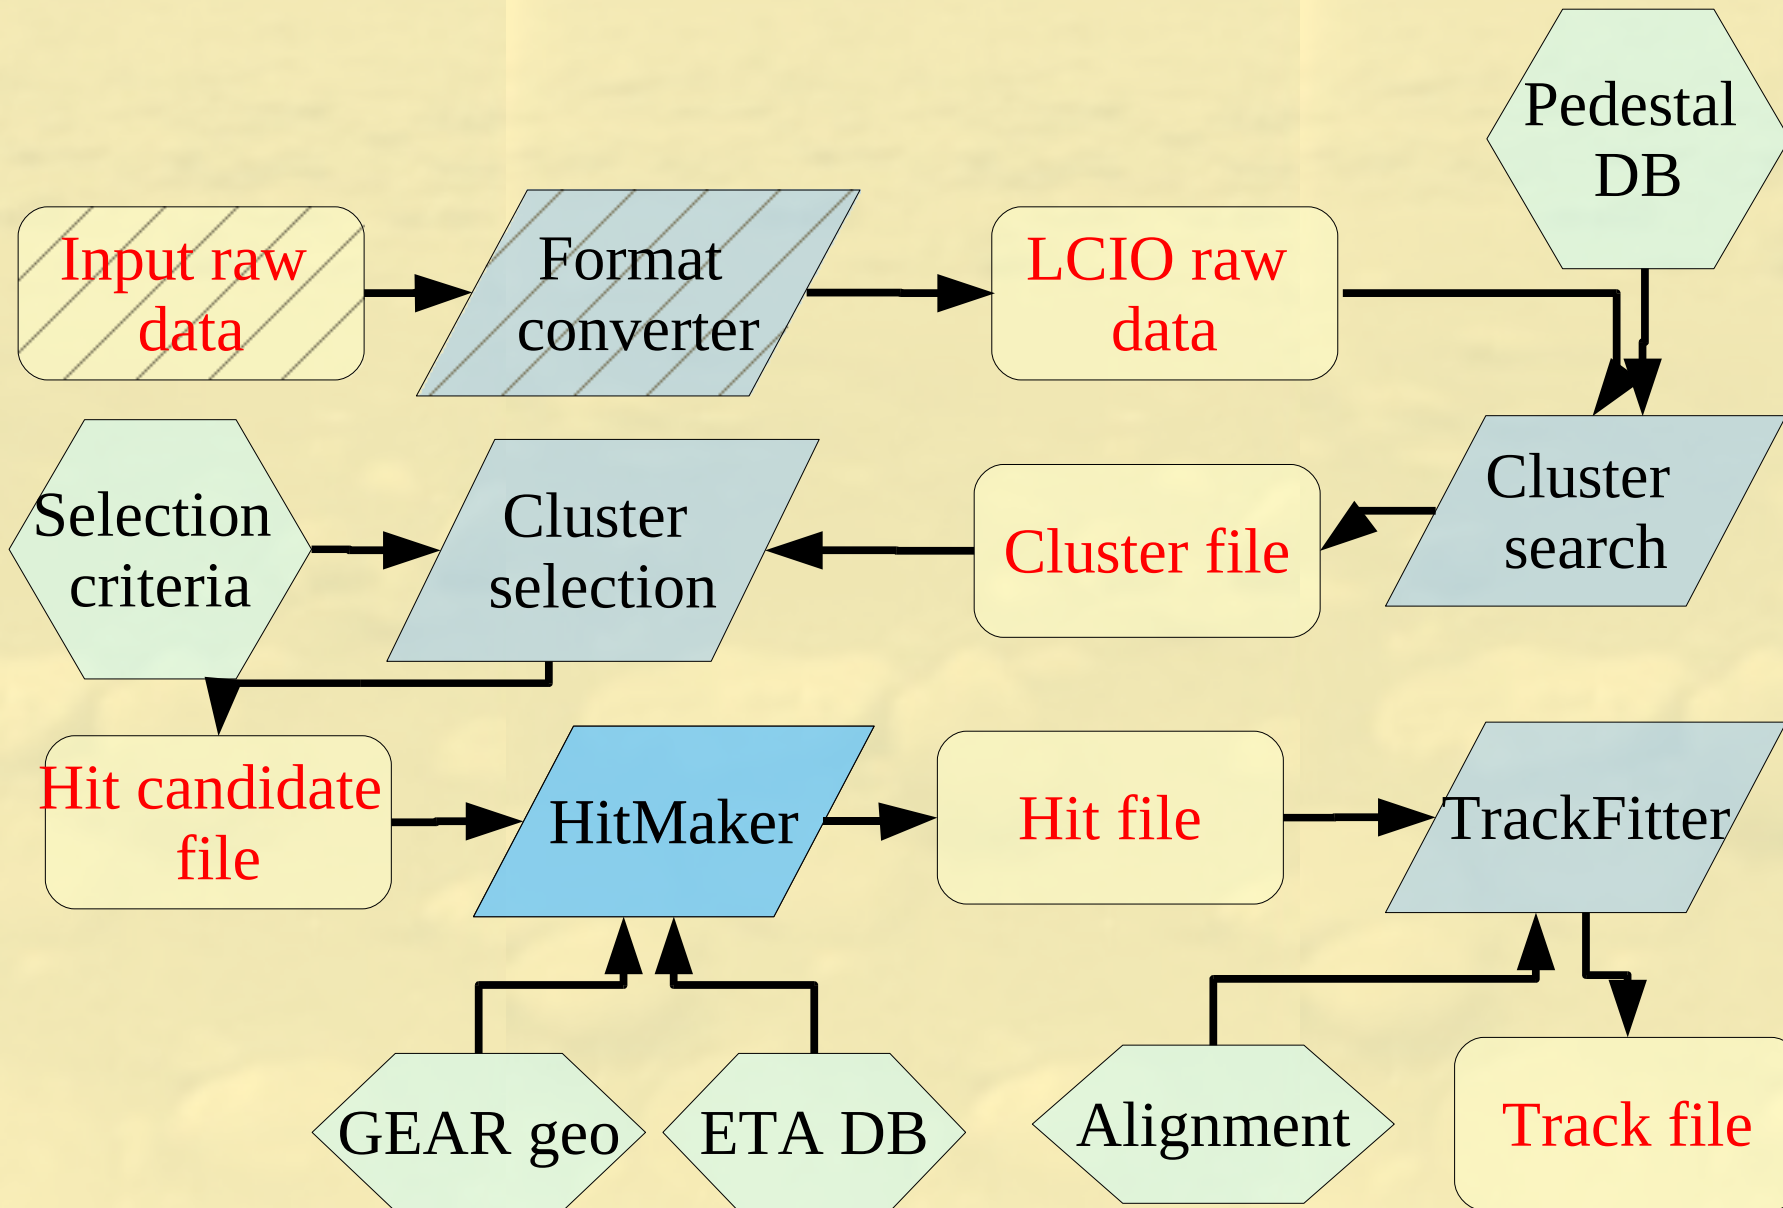

Test beam effort in 2007 and 2008



• The JRA1 group organized three tests on beam from June to September (2 at DESY and 1 at CERN) for a total of 6 weeks of data taking out of 12 working weeks... a real effort!

😊 TB-DESY-JUNE (11 / 24 June 2007)

- Integration (and smoke) test

😊 TB-DESY-AUGUST (13 / 24 August 2007)

- Testing the tester

😊 TB-CERN-SEPTEMBER (17 / 27 September 2007)

- First high energy test and first user: DEPFET

TB-CADARACHE-APRIL (on going)

- Using the high resolution telescope to track nuclear reactor neutrons

TB-CERN-JUNE

- Main user SiLC

TB-CERN-AUGUST

- Several users: MimoRoma, DEPFET, LCFI






- All-inclusive package

- The two arm telescope with different geometries with the possibility to add one extra high resolution sensor plane.
 - The telescope comes with all the mechanics and the cooling system.
 - Operating support: mainly remote but also local in some circumstances.
- The DAQ system both hardware and software.
 - You can connect your device to our TLU, or (better) help is provided to integrate your R/O in our DAQ software.
- The analysis and reconstruction software.
 - As for the DAQ, you can rely on our output track file, or integrate your device in the main analysis stream.

Summary of the results: the event display



TB-CERN
SEPTEMBER

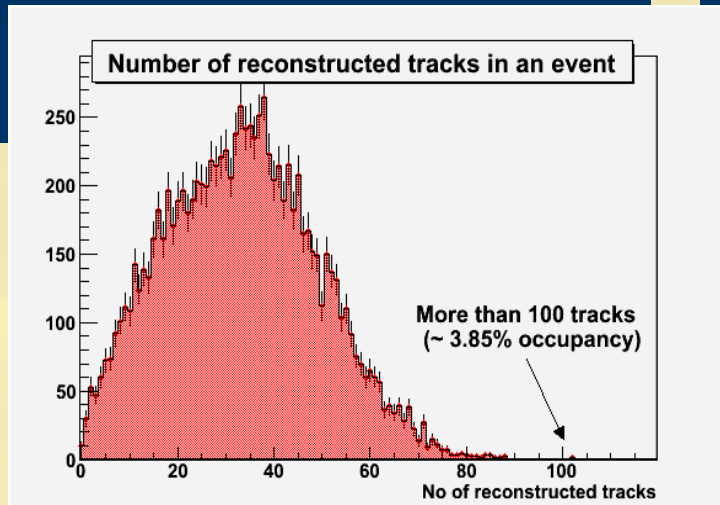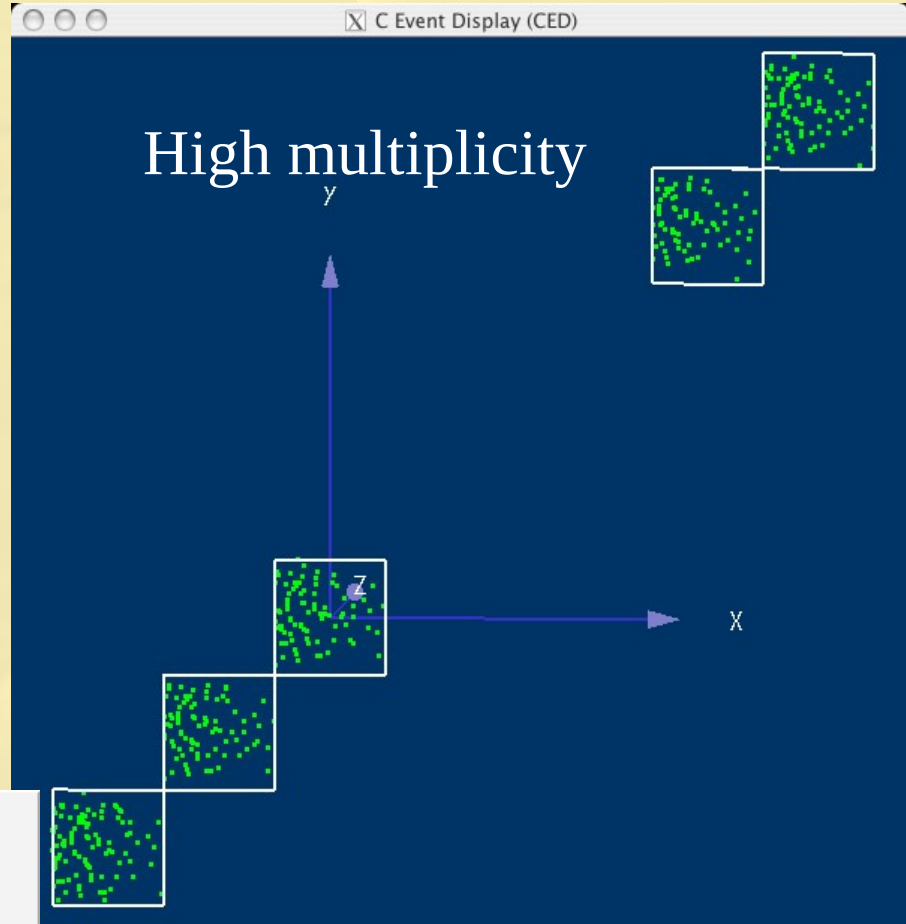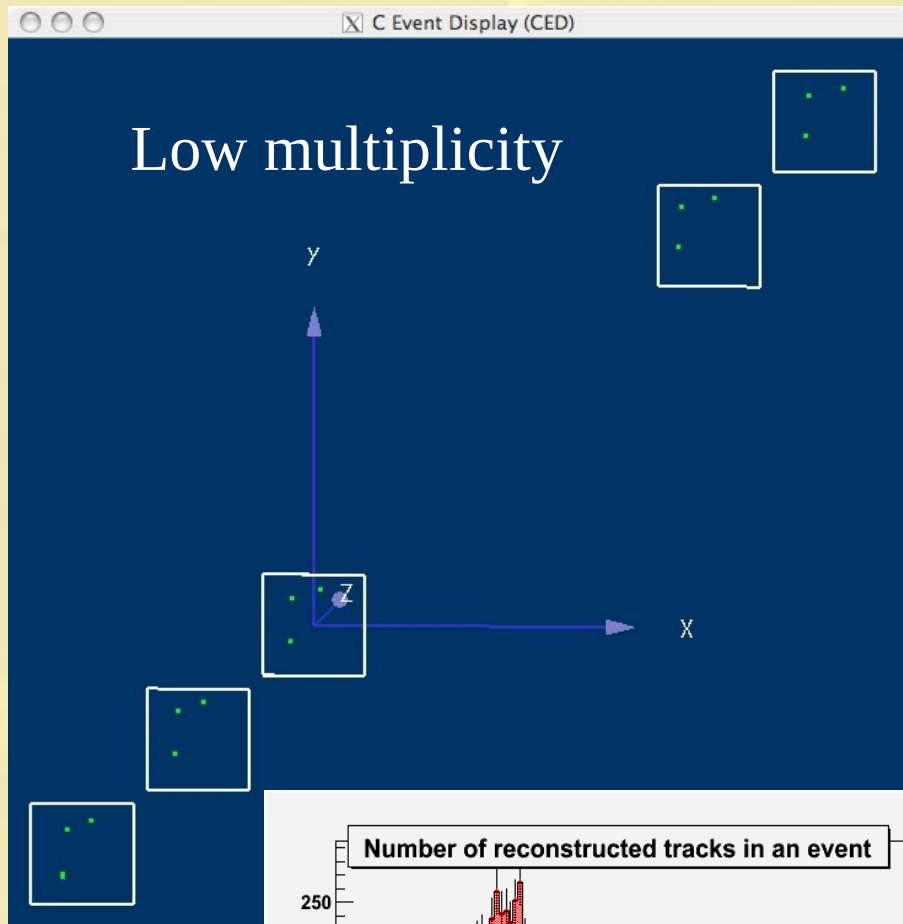

- OpenGL event display fully scalable and movable
- The same used for the ILD detector



Sensor plane characterization



TB-CERN
SEPTEMBER

Detector #	SNR4	SNR3x3	Signal4 [ADC]	Signal3x3	SeedSNR
14 μm epi D0	14.0	11.2	104.4	131.0	12.5
14 μm epi D1	13.6	10.9	103.0	129.0	12.2
14 μm epi D2	14.3	11.3	105.0	130.3	12.8
20 μm D3	13.0	11.0	112.8	151.4	10.9
20 μm D4	15.0	13.2	109.7	147.6	12.6

Landau MPV; $T = 21 \text{ }^\circ\text{C}$; Typical single pixel noise = 3.6 ADC (17 e-)

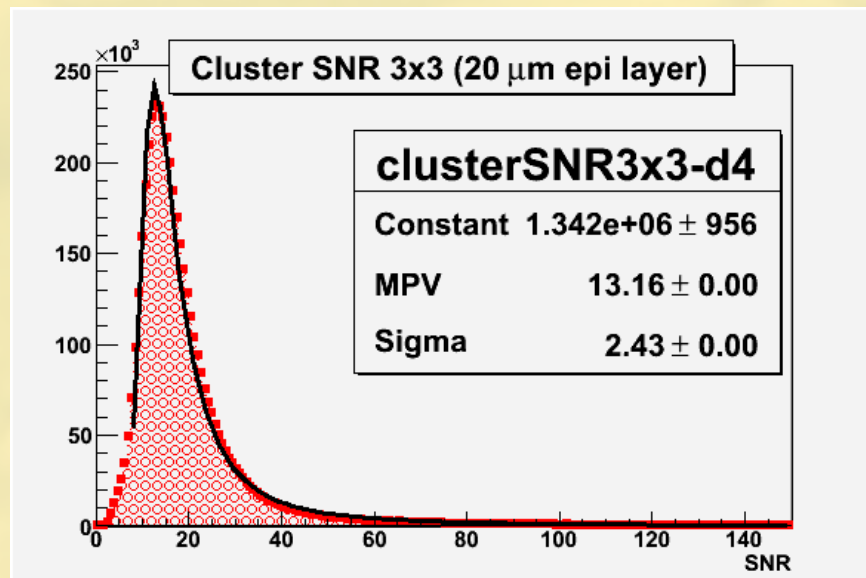
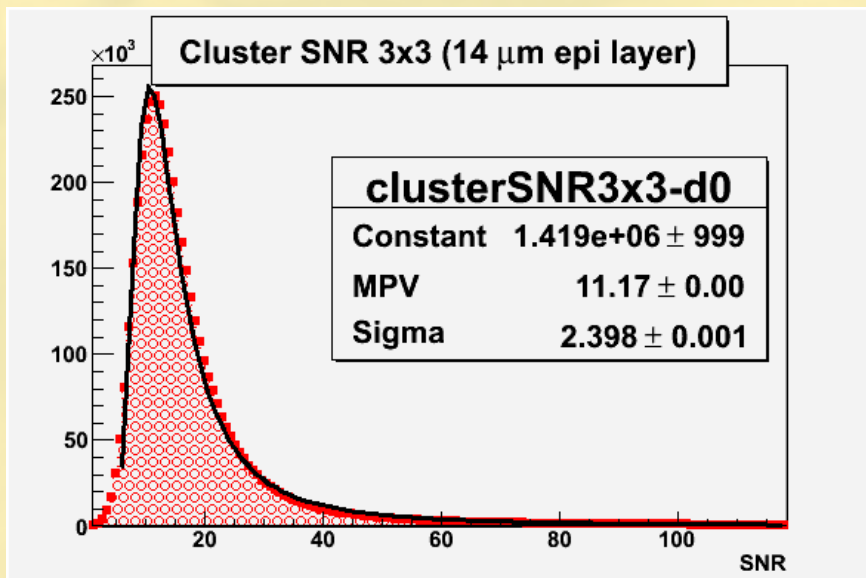


Telescope alignment



Detector #	Before alignment [μm]		After alignment [μm]	
	X	Y	X	Y
D0	REFERENCE			
D1	334.7	-395.3	0.26	0.68
D2	438.5	-345.9	-0.05	-0.26
D3	871.5	-547.4	0.38	-0.04
D4	54.7	-285.9	-0.31	0.01



TB-CERN
 SEPTEMBER

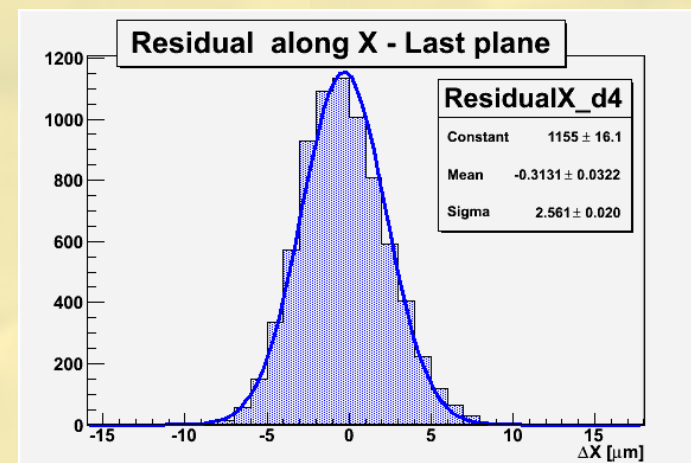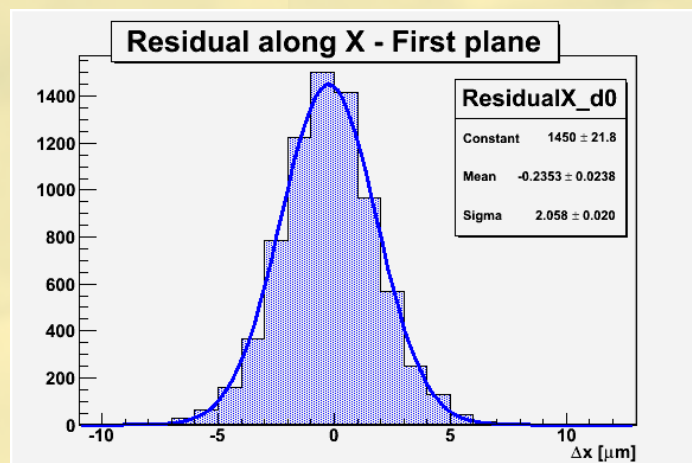

Using one plane as a DUT



- Straight line fitting procedure using four planes only and extrapolating on the central one
- Fitting on x and y independently
- χ^2 cut < 20

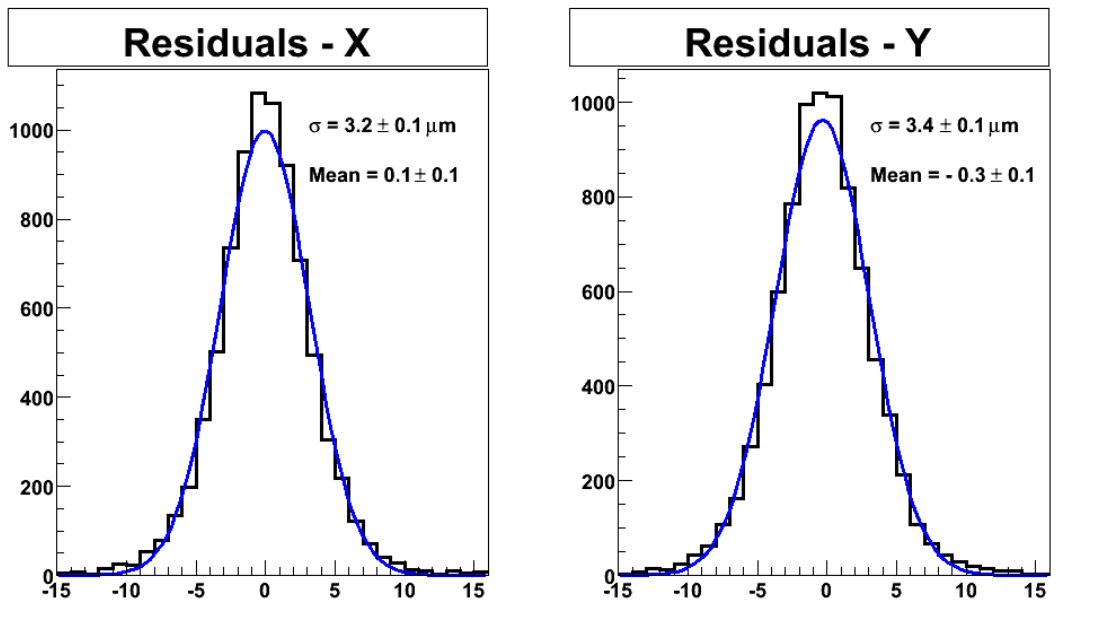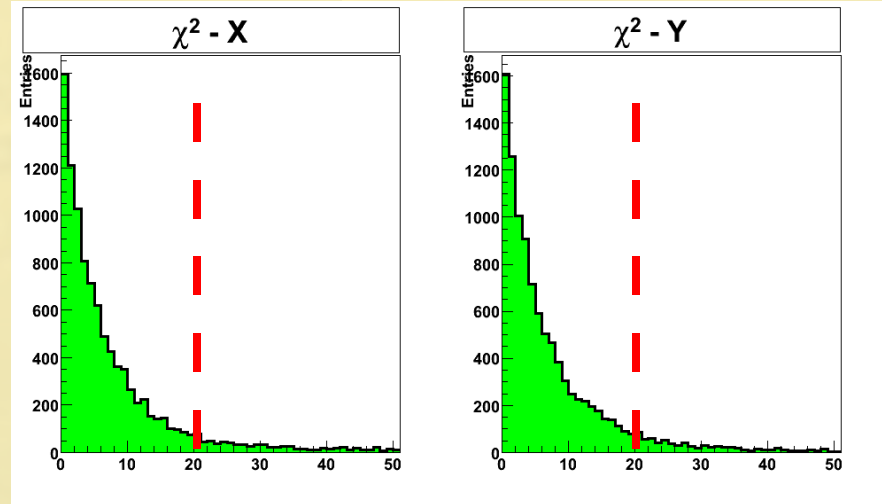

- Measured (intrinsic \oplus telescope) resolution is **3.4 μm**

TB-CERN
SEPTEMBER

When the MS does matter





TB-DESY
AUGUST

- When working with 3 and 6 GeV e^- , multiple scattering does play a role.
- Forget about straight lines and consider the multiple scattering angles.
- Contribution of plane i to χ^2

$$\Delta\chi_i^2 = \left(\frac{y_i - p_i}{\sigma_i} \right)^2 + \left(\frac{\Theta_i - \Theta_{i-1}}{\Delta\Theta_i} \right)^2$$


position measurement multiple scattering

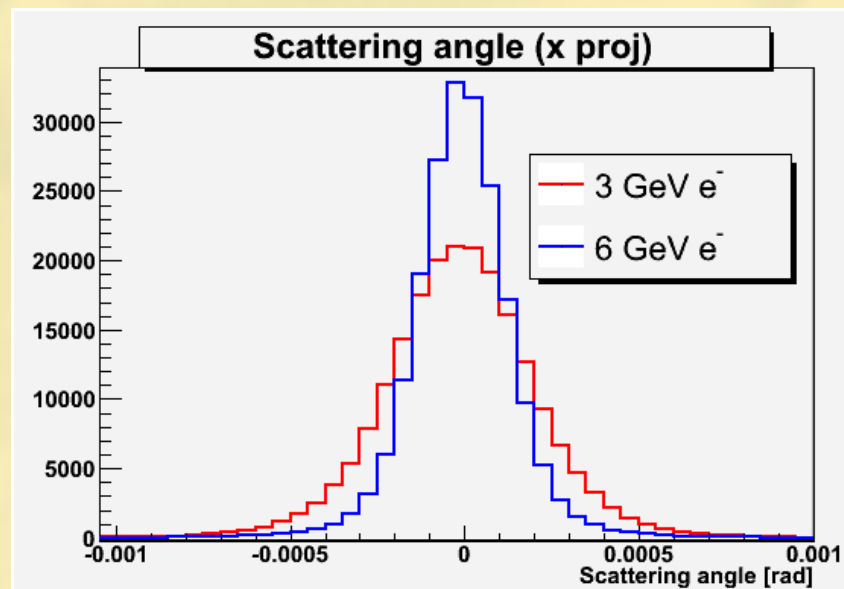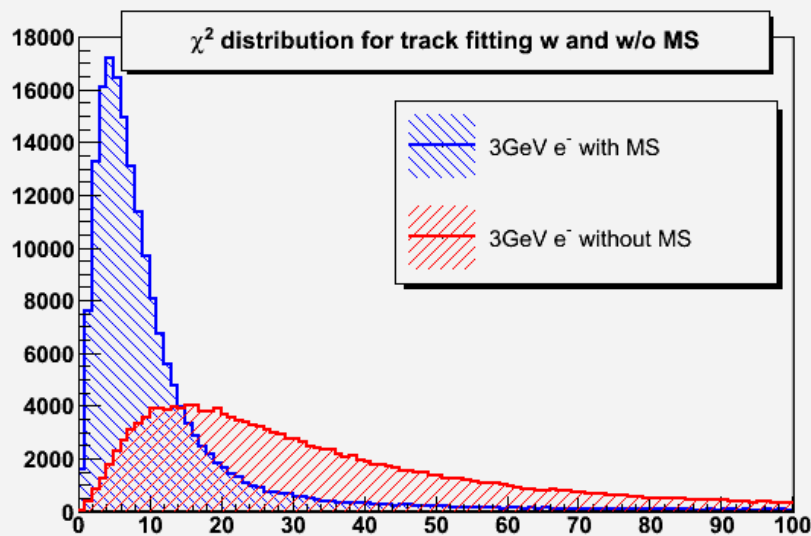




- Using the analytical fit, it is possible to take MS into account. Due to MS the telescope resolution is slightly worse at lower energies. But the observed widths are in very good agreement with expectations.

expected fit precision at DUT = 4.22 μm
 expected DUT width = 5.12 μm
 measured width = **5.09** μm / **5.28** μm

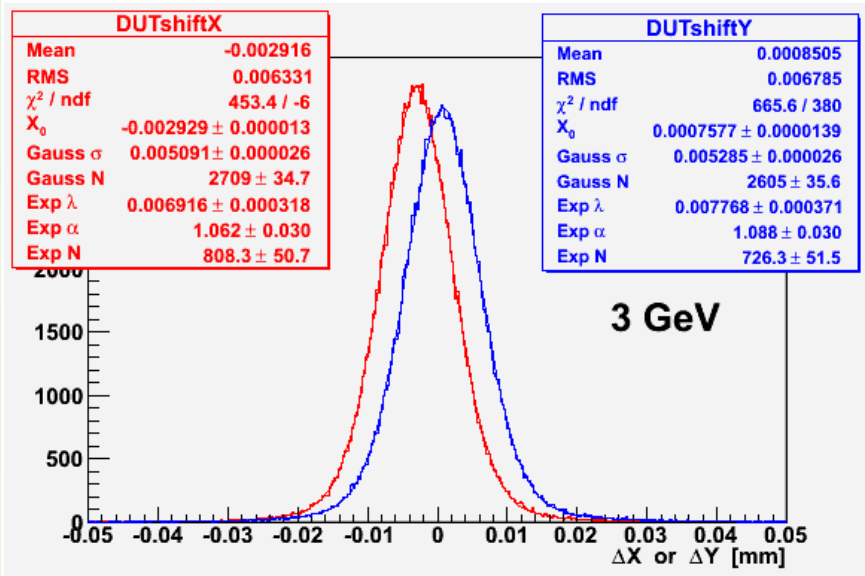

expected fit precision at DUT = 2.89 μm
 expected DUT width = 4.16 μm
 measured width = **4.03** μm / **4.21** μm

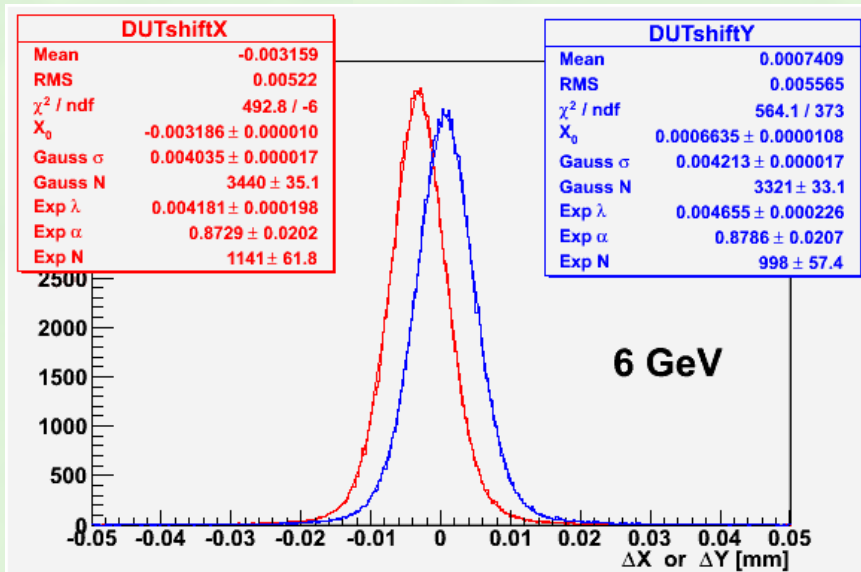


Is the ZS working?




- Telescope operated in MIXED mode (one every second sensor is readout in ZS mode)


Residuals for plane 0

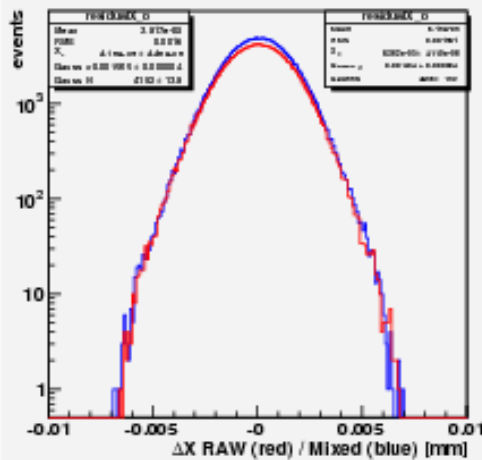


Residuals for plane 1

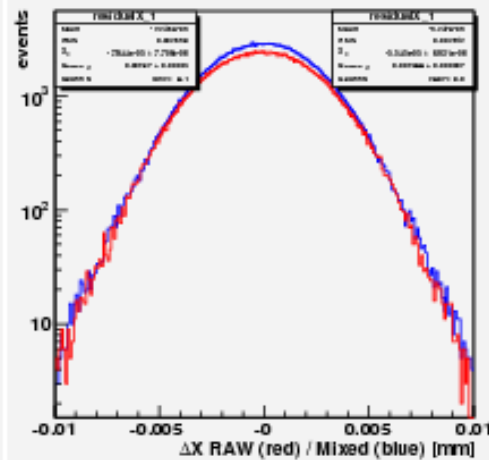


Residuals for plane 2

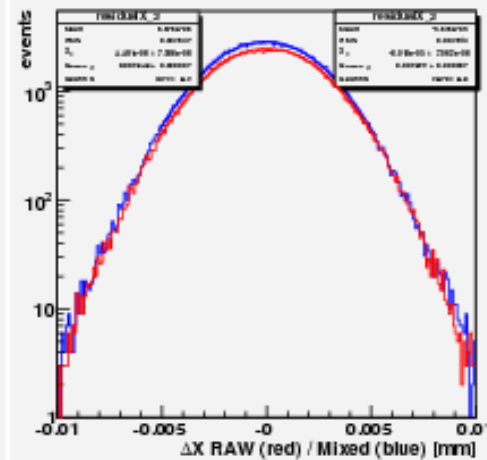

Residuals for plane 3

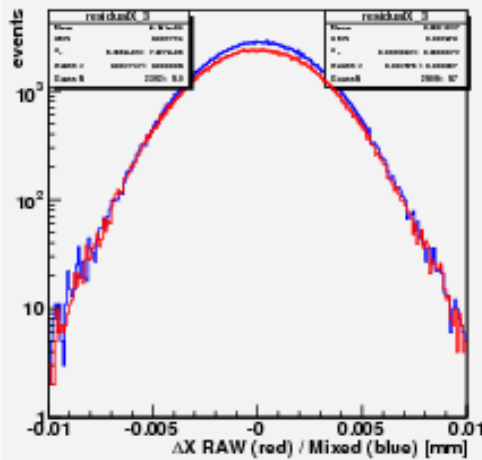

Residuals for plane 4

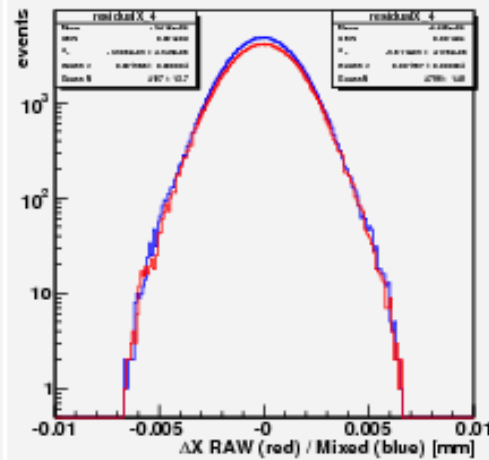


- Comparison between a MIXED and a RAW run

TB-DESY
AUGUST



- M22+ = M22 + SUZE01
- 544 x 1088 pixels with 18.4 um pitch
- Hardware clustering algorithm with sparsified output


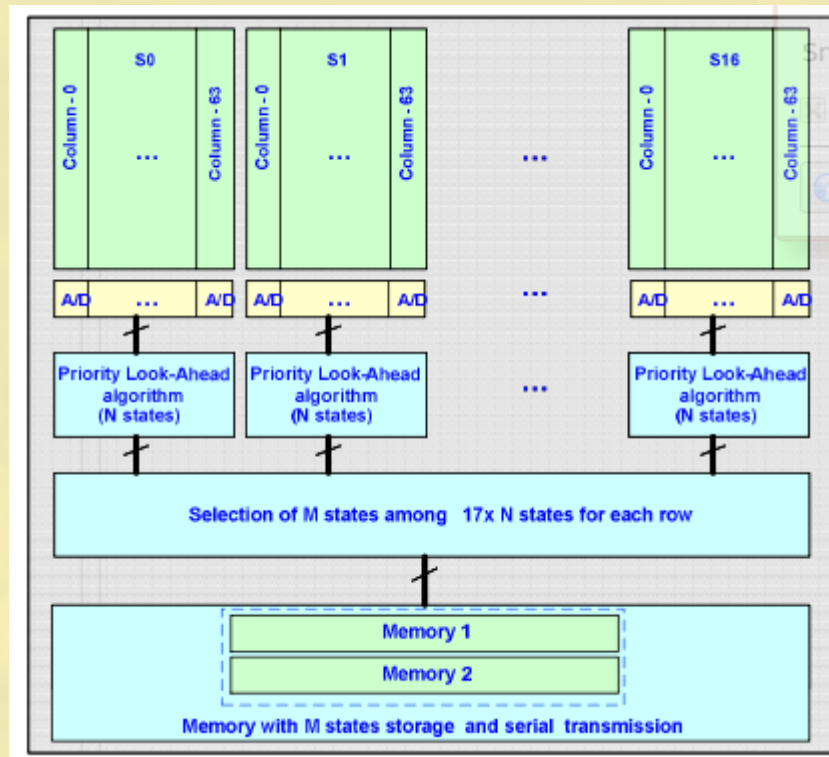




- EUDET is a great opportunity for team involved in detector R&D for the ILC
- Everybody can join the fun and use the developed infrastructure to test their own devices
- The telescope demonstrator is working according to specs but the final one is about to come.



Test beam area @ DESY

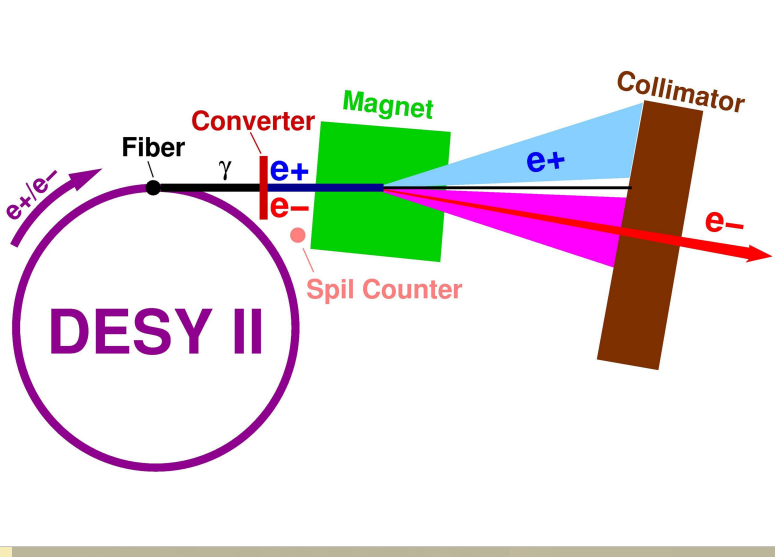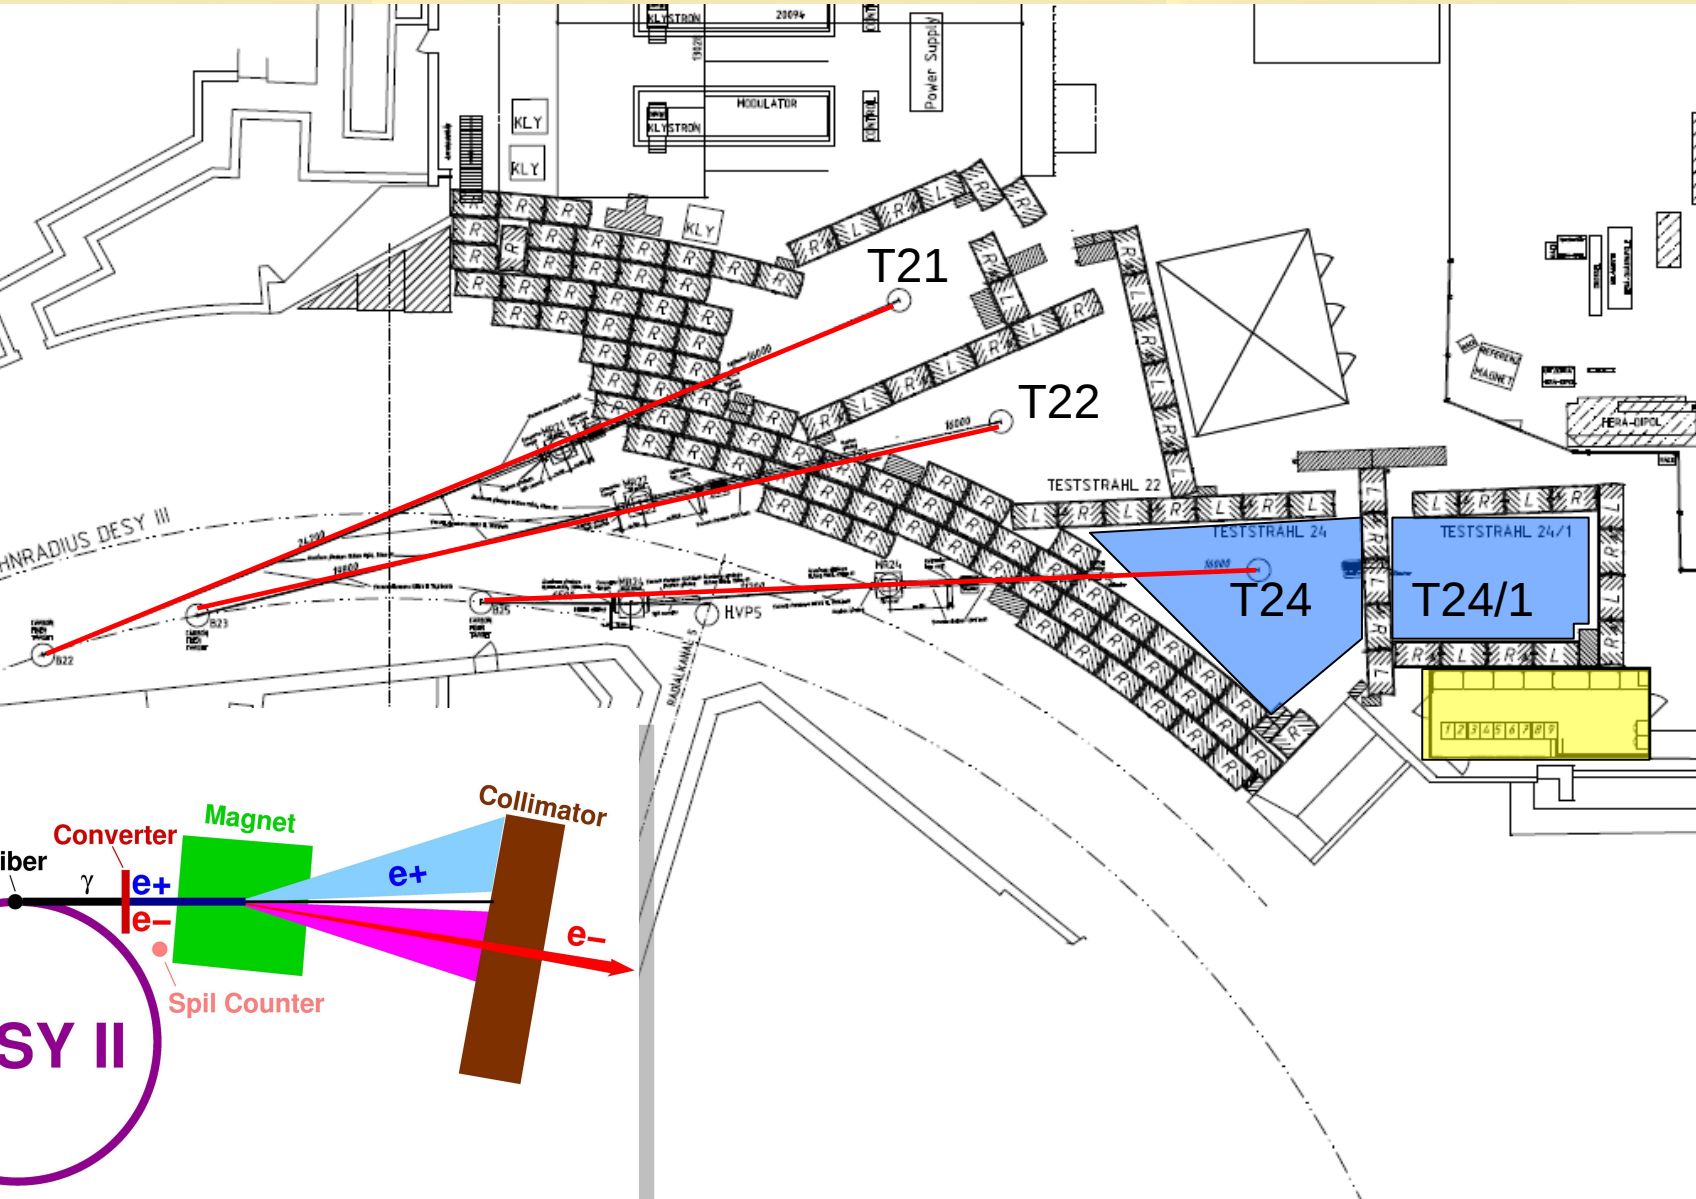



EUTETestFitter


Results provided by
A.F. Zarnecki

Analytical approach

We can determine track position in each plane (including DUT), i.e. N parameters ($p_i, i = 1 \dots N$), from $M < N$ measured positions in telescope planes.

We use constraints on multiple scattering!

Contribution of plane i to χ^2 of the fit

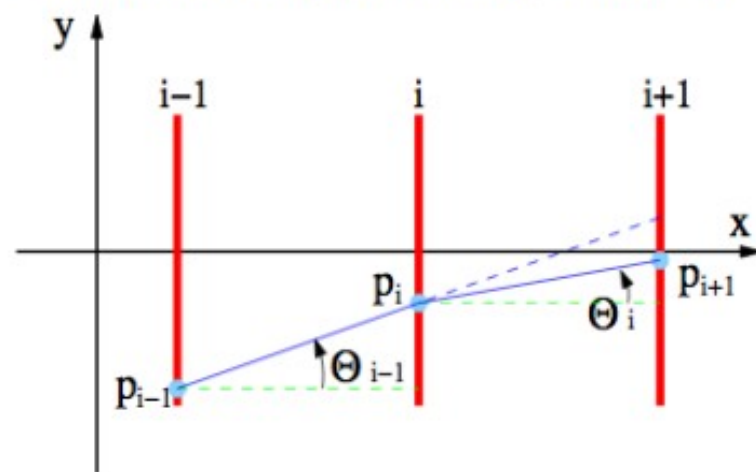

$$\Delta\chi_i^2 = \left(\frac{y_i - p_i}{\sigma_i} \right)^2 + \left(\frac{\Theta_i - \Theta_{i-1}}{\Delta\Theta_i} \right)^2$$

position measurement multiple scattering

where: $\Theta_i = \frac{p_{i+1} - p_i}{x_{i+1} - x_i}$

Both terms present for planes $i \neq 1, i_{DUT}, N$,
first term missing for DUT, second for first and last plane

χ^2 minimum can be found by solving the matrix equation - fast!

Constraint from the beam direction can also be taken into account.