



MLI and HLRF Summary

Chris Adolphsen
10/03/09

SLAC 4.2K Stand Relocation to FNAL in FY10





Cryostat 4.2 K LHe

**Power supplies
and control
system**



- Relocate ILC Quadrupole Test Stand from SLAC to FNAL.
- SLAC stand commissioning at FNAL.
- Upgrade stand cryostat to simplify assembly with the magnet.
- Test the ILC Quadrupole center stability by stretch wire.

Quadrupole Mechanical Concept

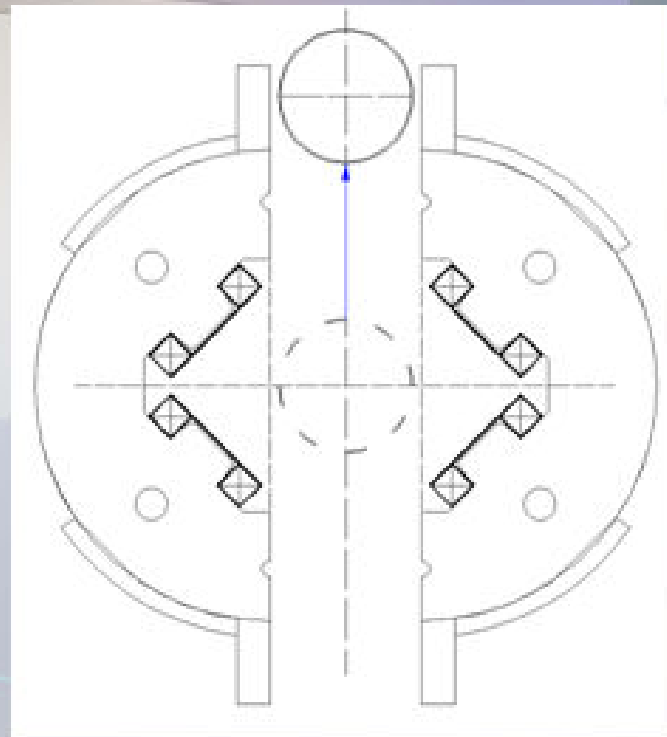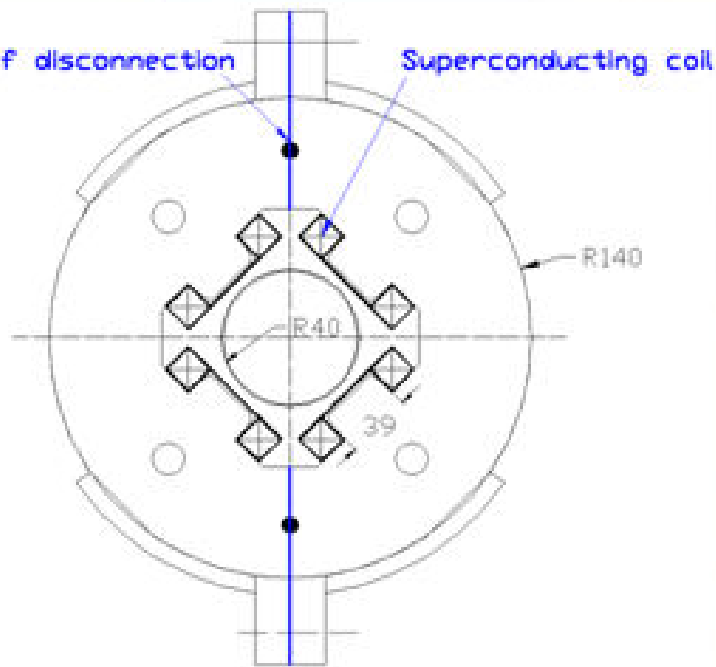


QUADRUPOLE MODEL PARAMETERS


Parameter	Unit	Value
Peak current at 36 T gradient	A	100
Magnet length	mm	680
NbTi superconductor diameter	mm	0.5
Superconductor filament size	μm	3.7
Superconductor critical current at 5 T and 4.2 K	A	200
Coil maximum field	T	3.3
Quadrupole coil number of turns/pole		700
Yoke outer diameter	mm	280

It was chosen the quadrupole design with racetrack coils which easy to split in vertical or horizontal direction.

Quadrupole Package Inside Cryomodule

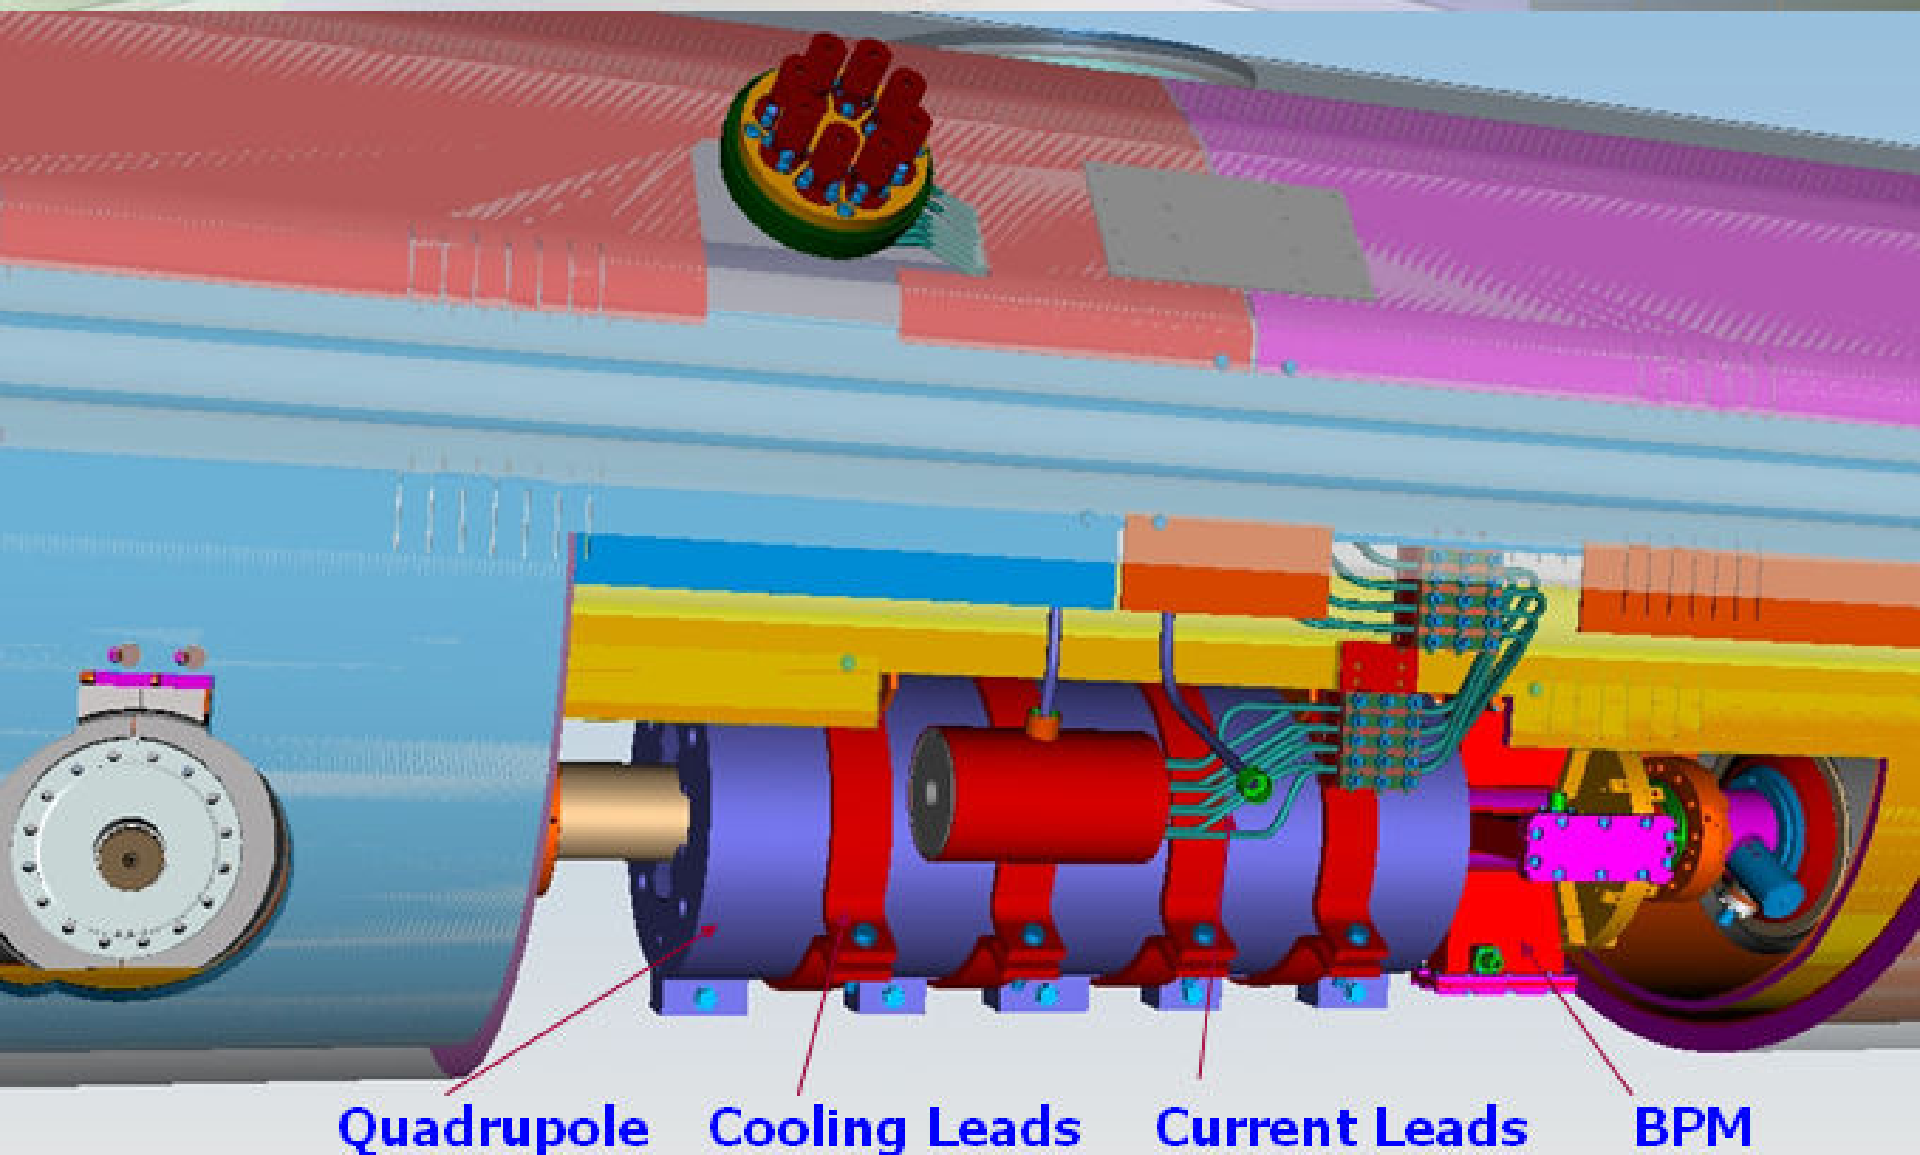


Window –
Ceramic brick of
alumina 96%
 $\epsilon_r = 9.4$
Size: 51x4x3 mm


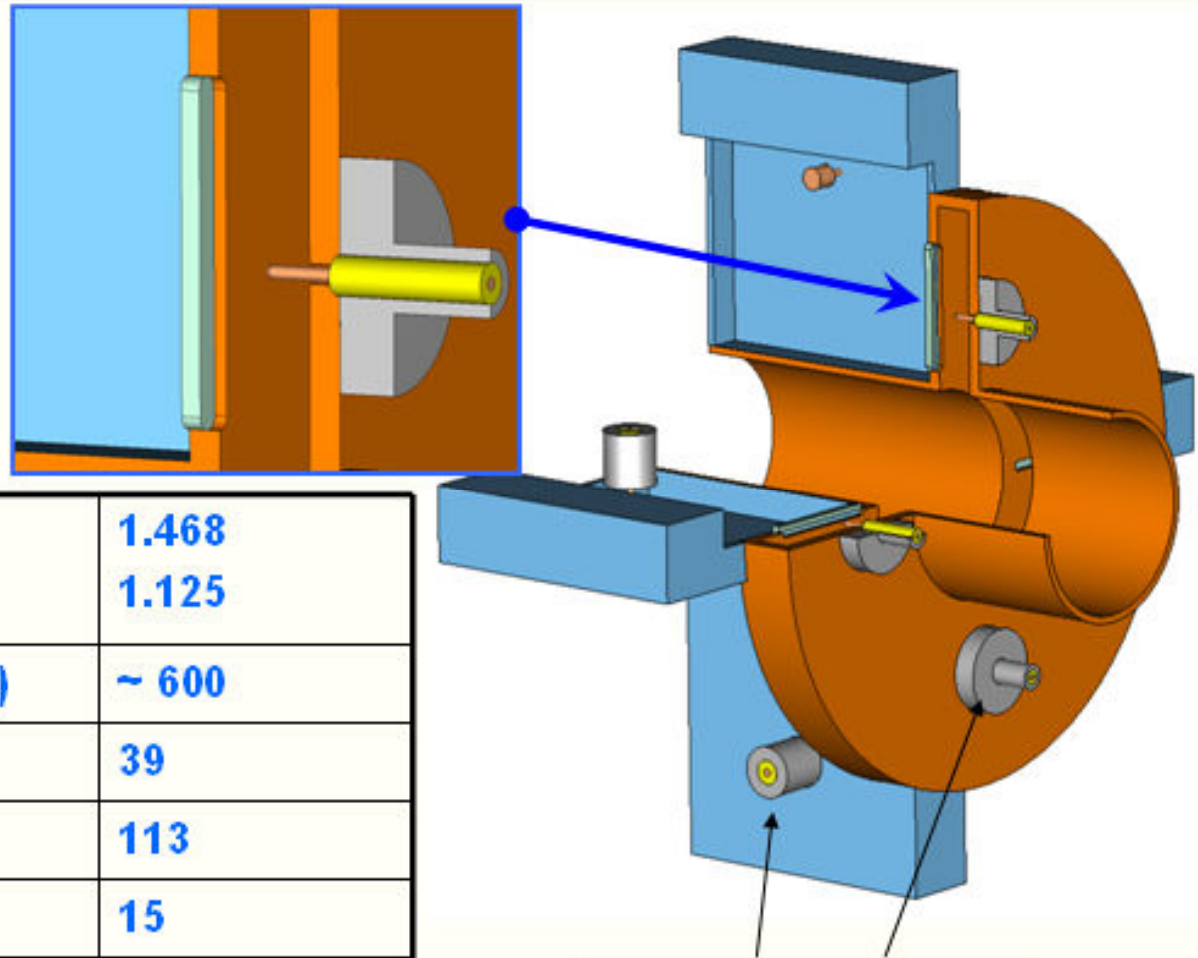


Frequency, GHz, dipole	1.468
monopole	1.125
Loaded Q (monopole and dipole)	~ 600
Beam pipe radius, mm	39
Cell radius, mm	113
Cell gap, mm	15
Waveguide, mm	122x110x25
Coupling slot, mm	51x4x3

N type receptacles,
50 Ohm






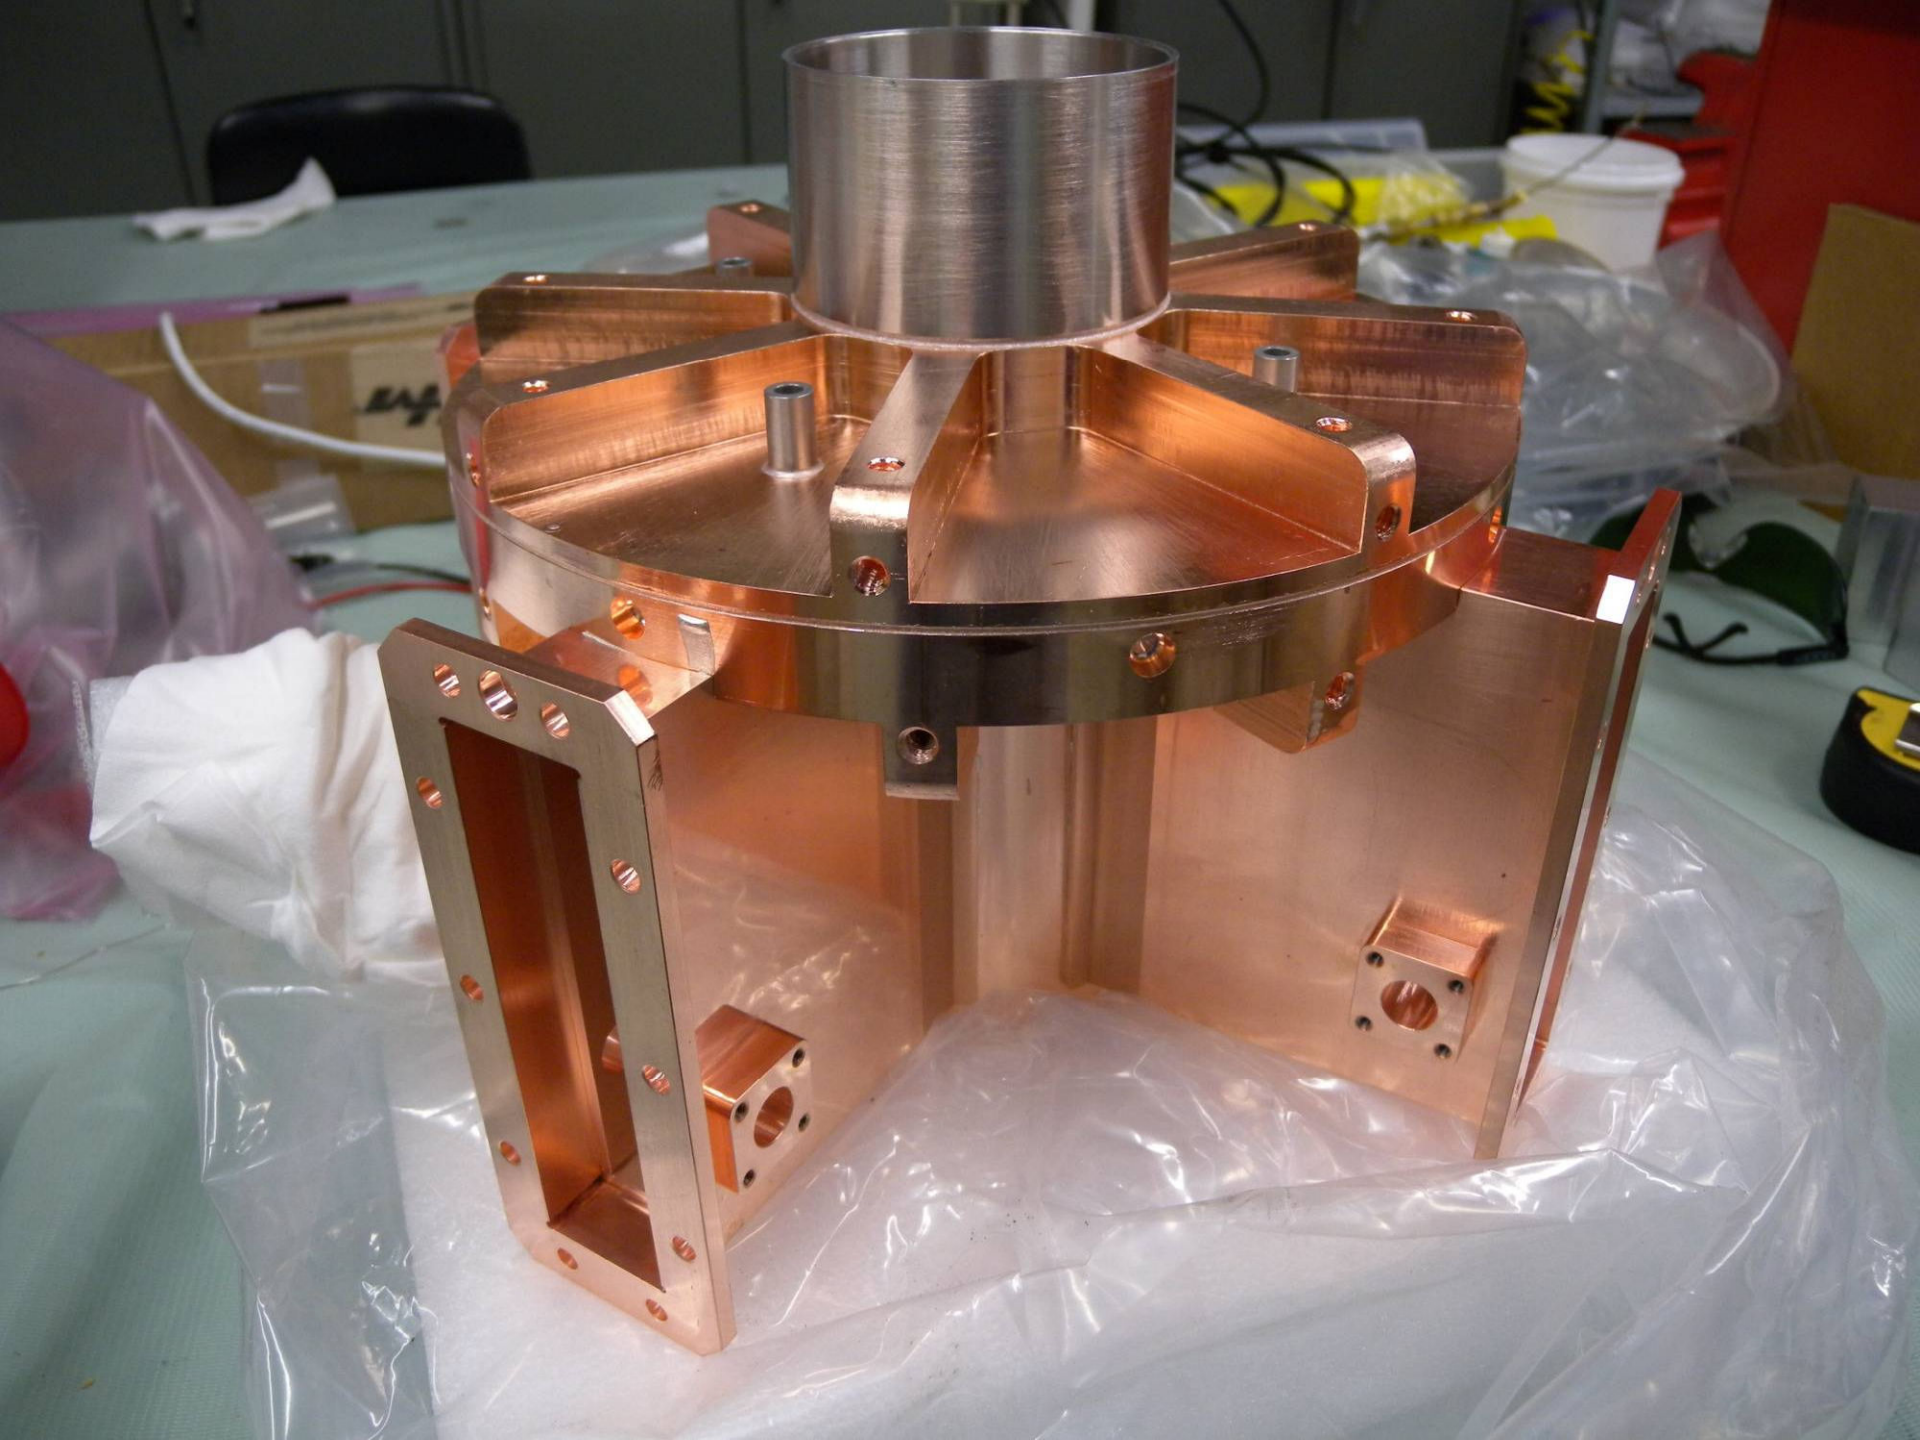


FLASH Beam Off Data: Strong Correlation Between Gradient and Cavity Detuning Jitter

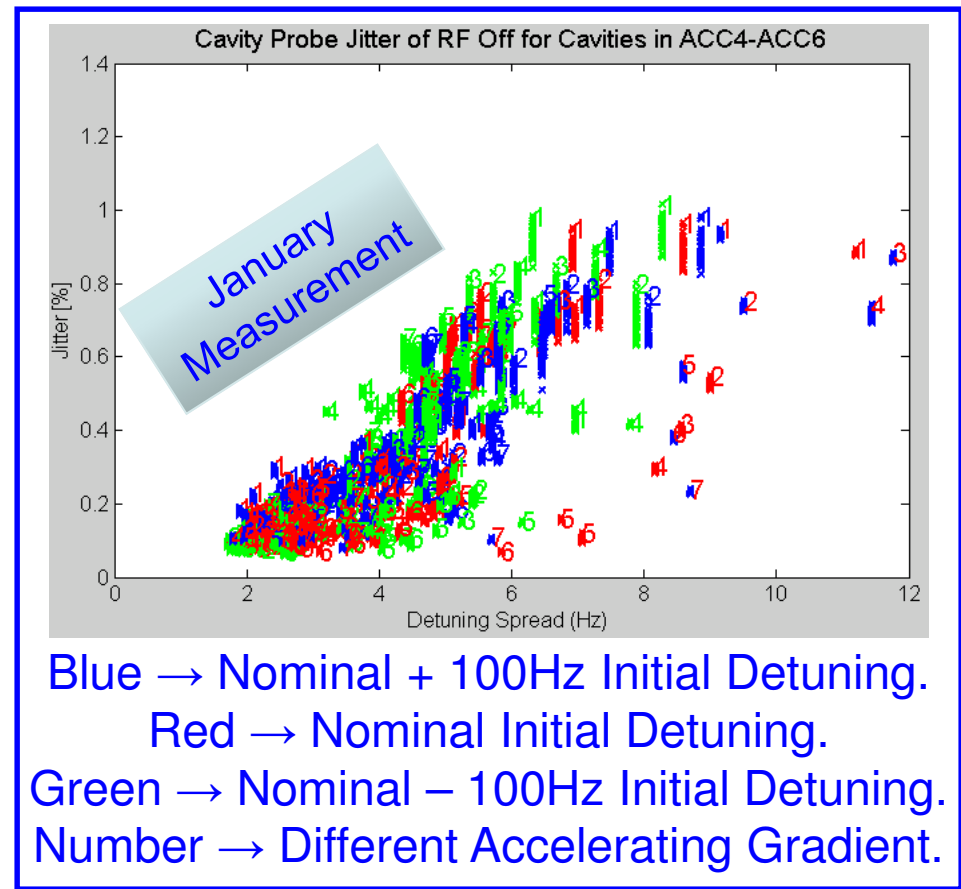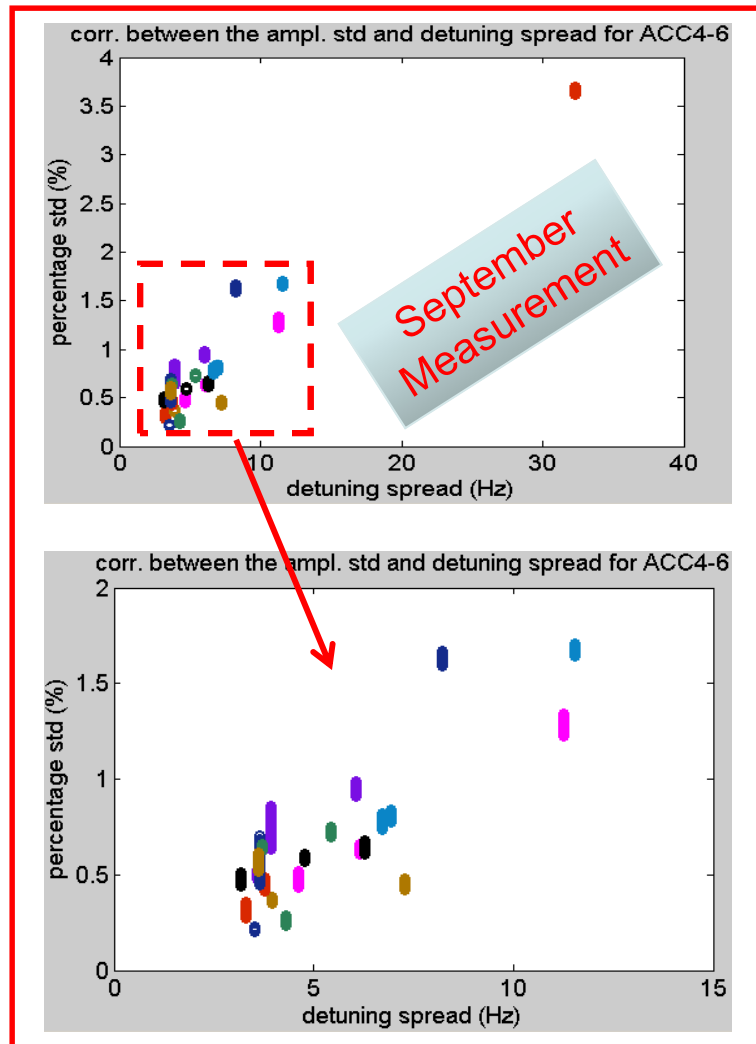

FLASH Cavity Gradient Stability

Comparison of beam-off measurements of pulse-to-pulse cavity gradient jitter during the flattop period for different gradients and initial cavity detuning (green, red and blue lines) to a cavity fill model including Lorentz force detuning (black lines) with two degrees of freedom (initial and initial rms detuning)

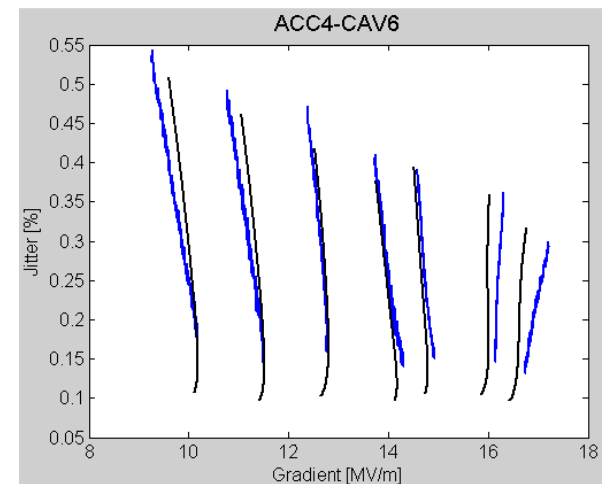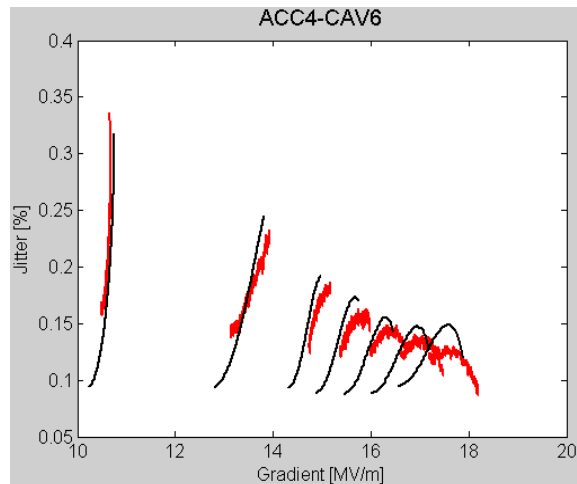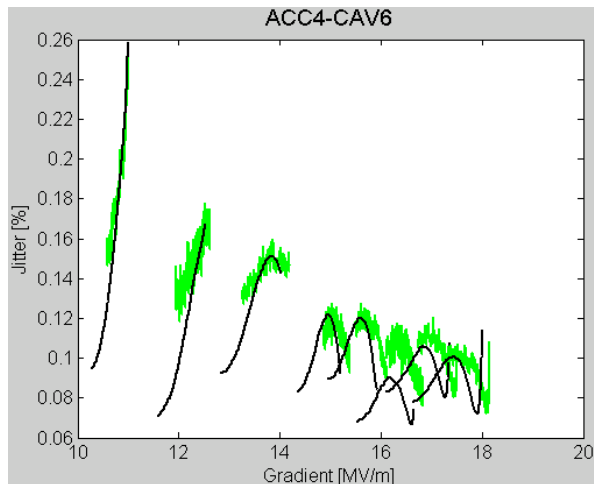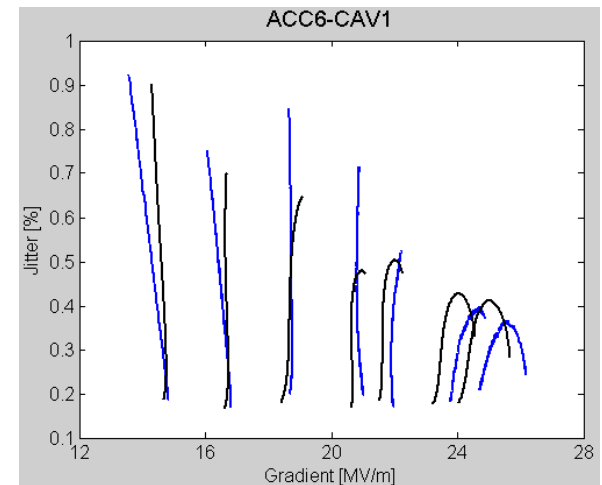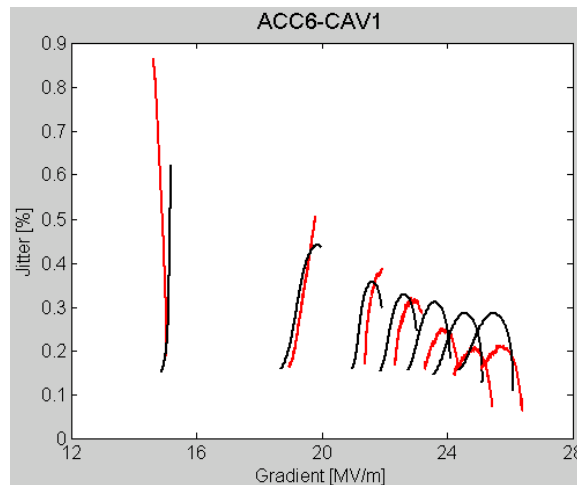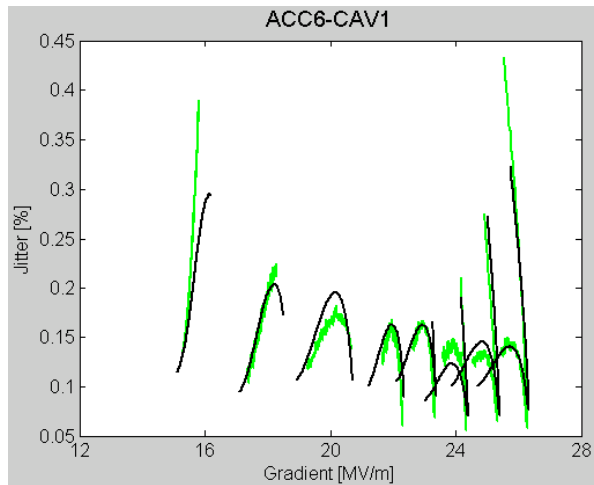





9mA Example Results

Much experience gained running with high beam-loading conditions

Approx. 15 TBytes of data to be analysed (beginning)

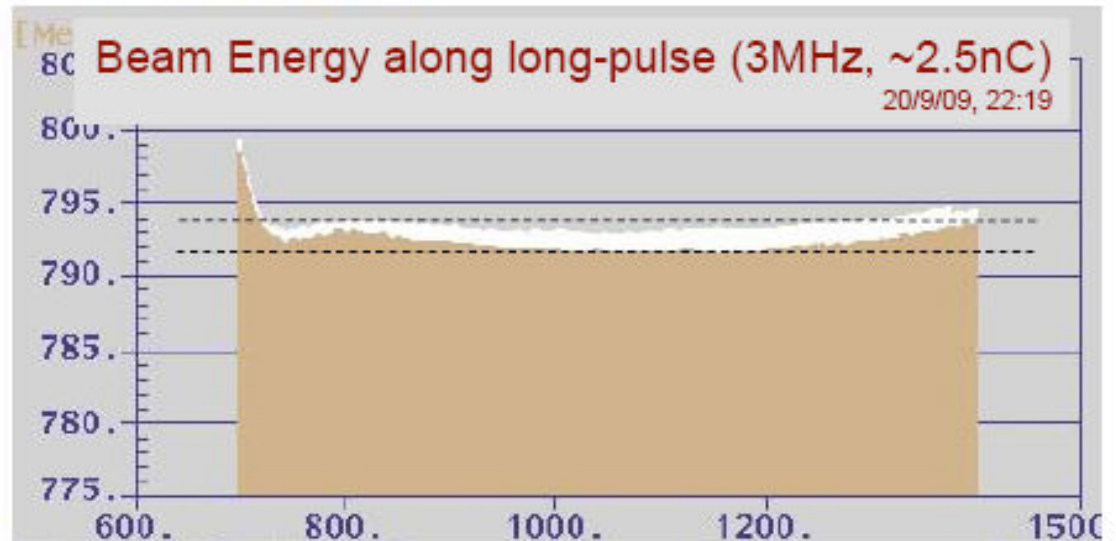

Along pulse: 0.1% RMS (0.5% pk-to-pk)
(after initial transient)
Pulse-to-pulse (5Hz): 0.13% RMS

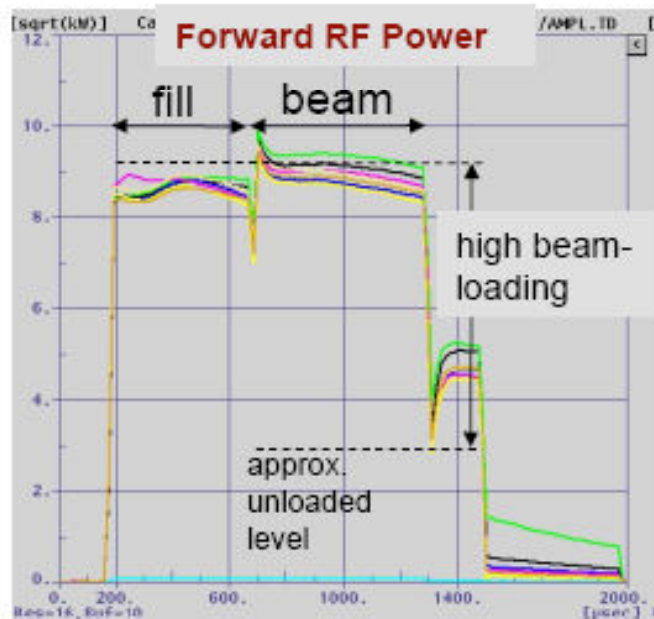


Integrated Systems Test

- Understanding trip and trip recovery (beam loss)
- RF parameter tuning
- RF system calibration

Extrapolation to XFEL/ILC




Pulse-to-Pulse energy jitter example (500 μ s, \sim 3mA, 200 pulses)

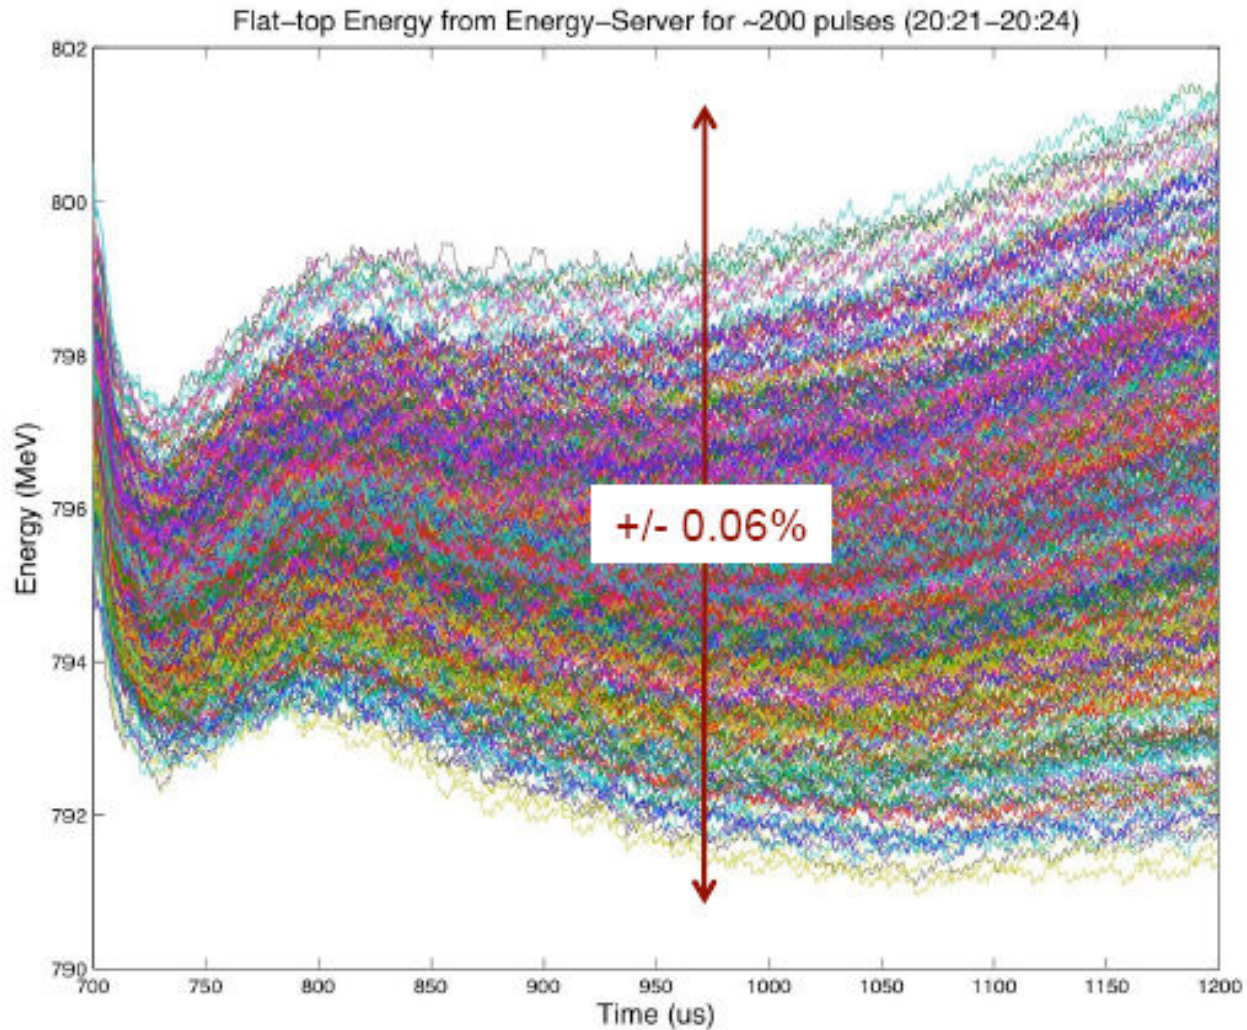




Beam loss

- Spent a lot of time fighting losses, mainly in three areas
 - Bunch compressor **BC3**
 - First dipole of bypass line
 - Beam dump line
- Losses speak to energy stability, orbit stability, energy / physical aperture, optics, dispersion,...



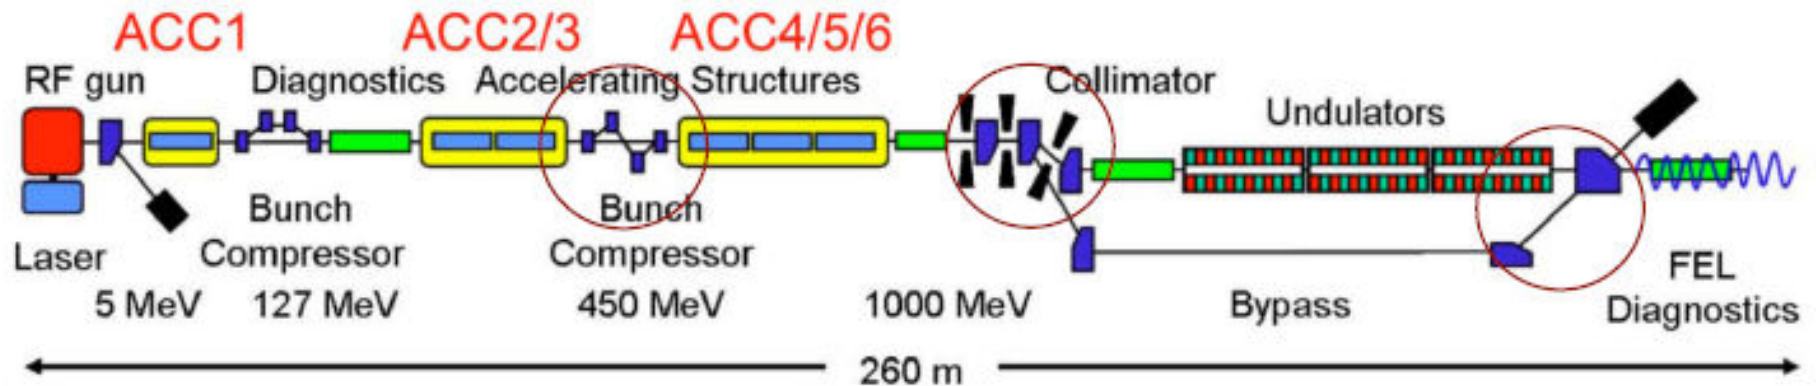


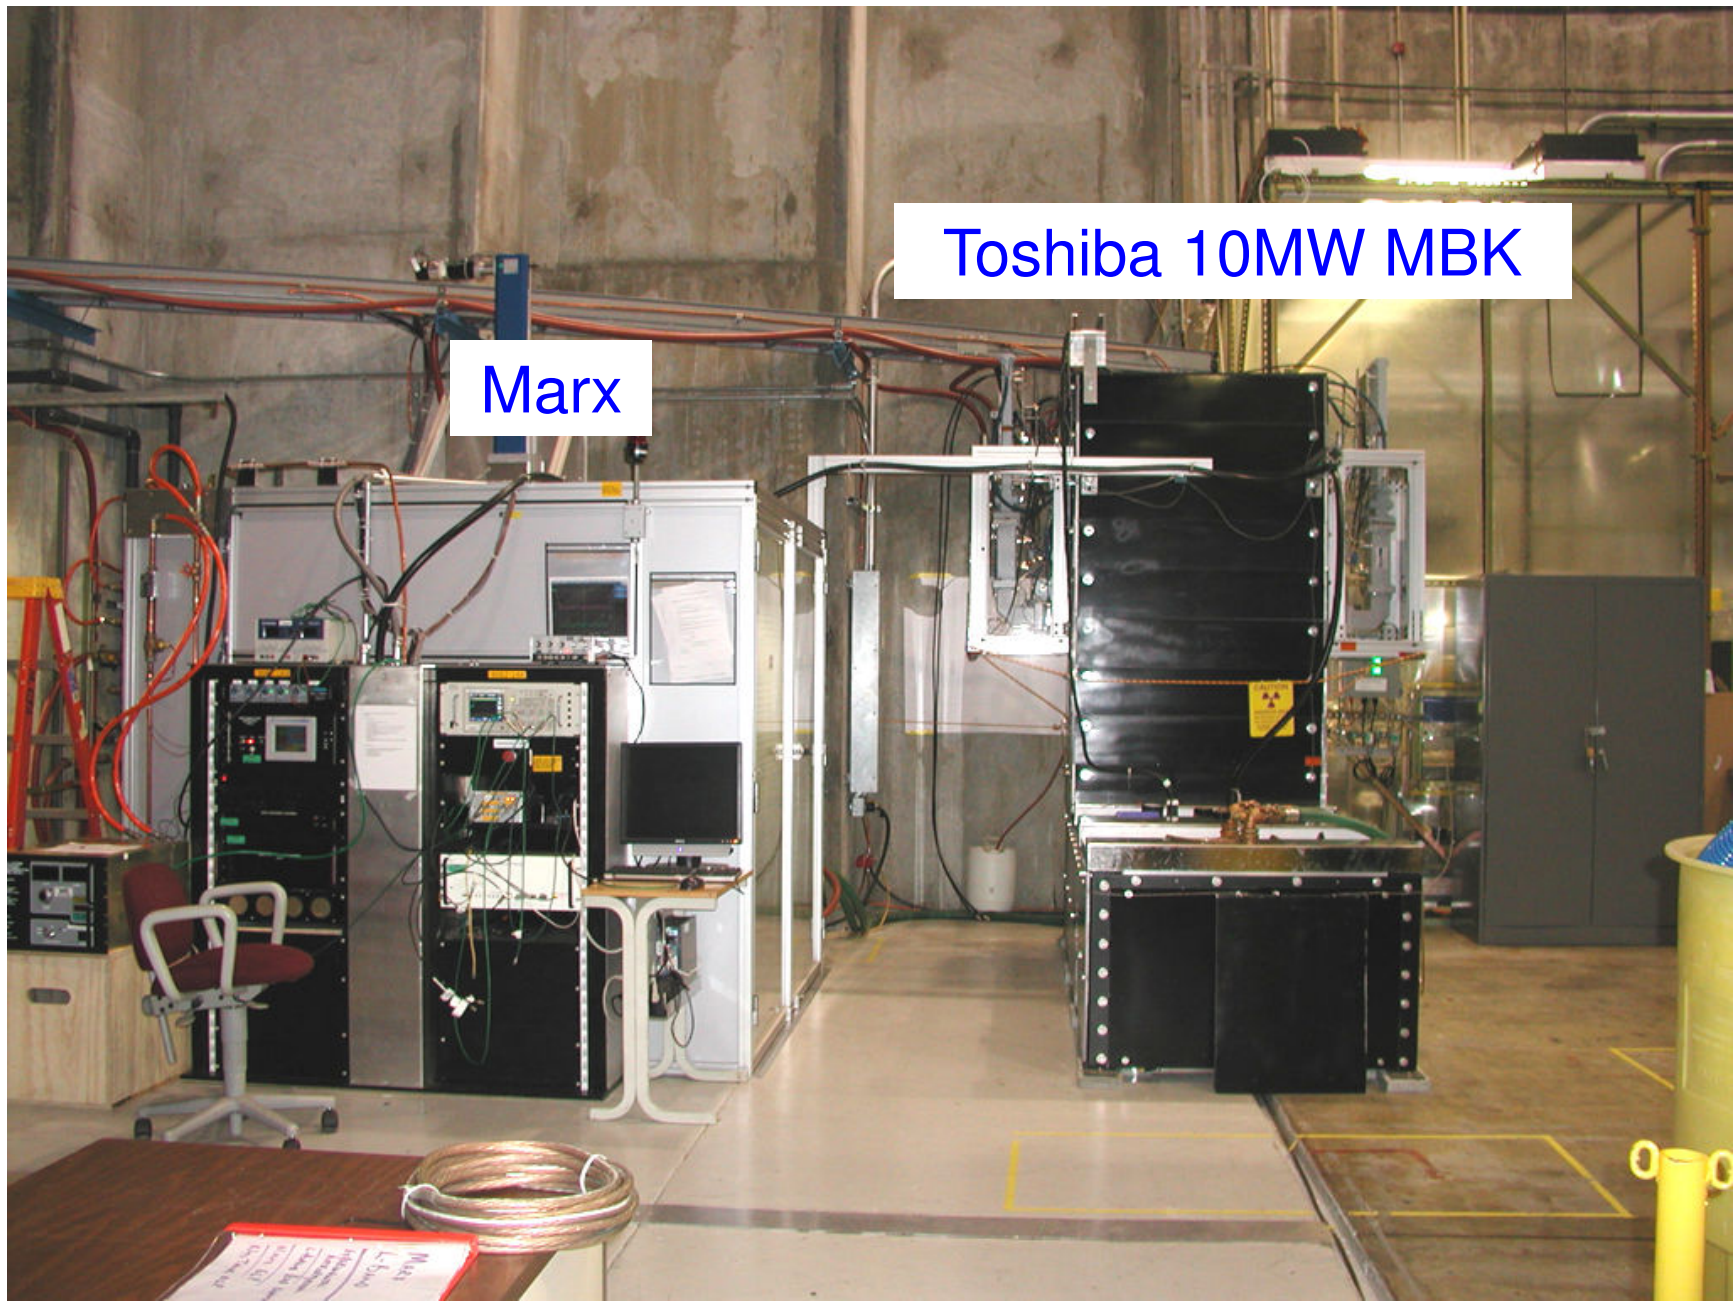

Toshiba 10MW MBK

Marx

Marx Modulator & Klystron Waveforms

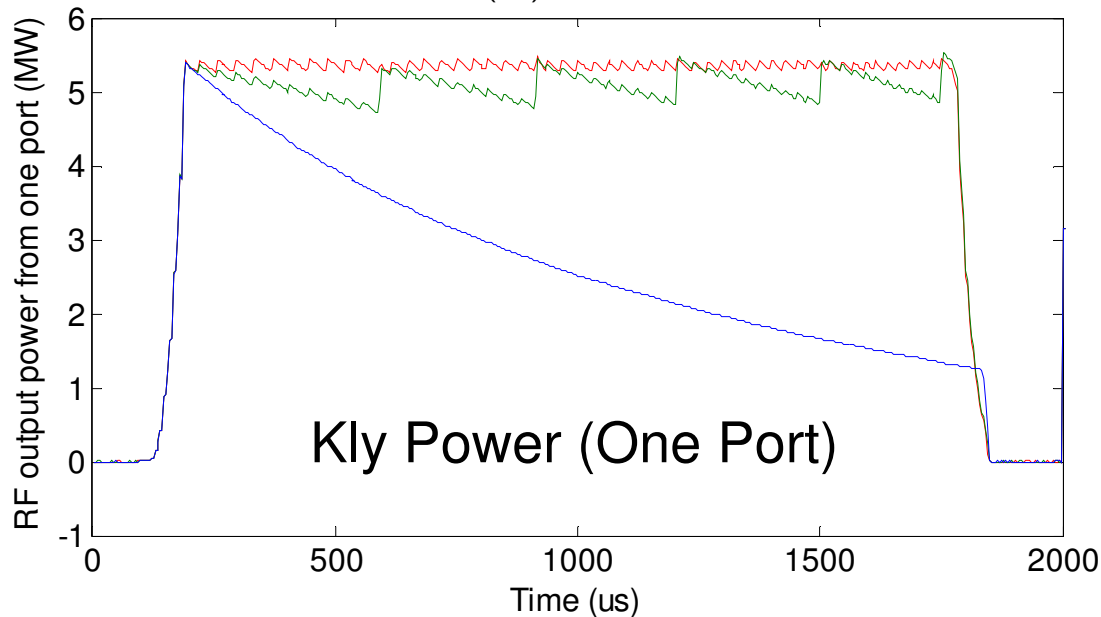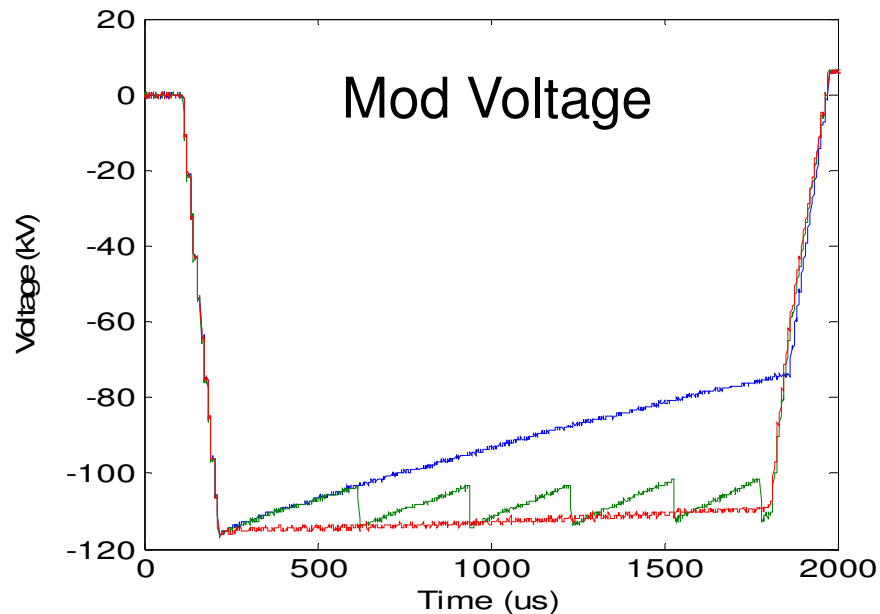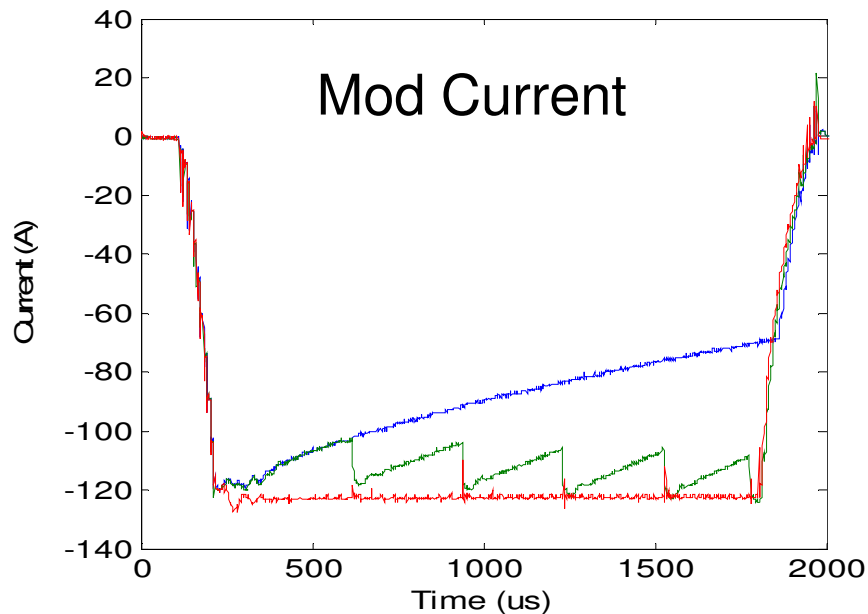


Blue: no droop compensation
Green: with only delay cells
Red: w/ delay cell and vernier


With all compensation, rf power flatness 3%

Ran ~ 200 hours thus far – had a few klystron widow arcs and PS problems

Sheet Beam Klystron (SBK) Gun Tester

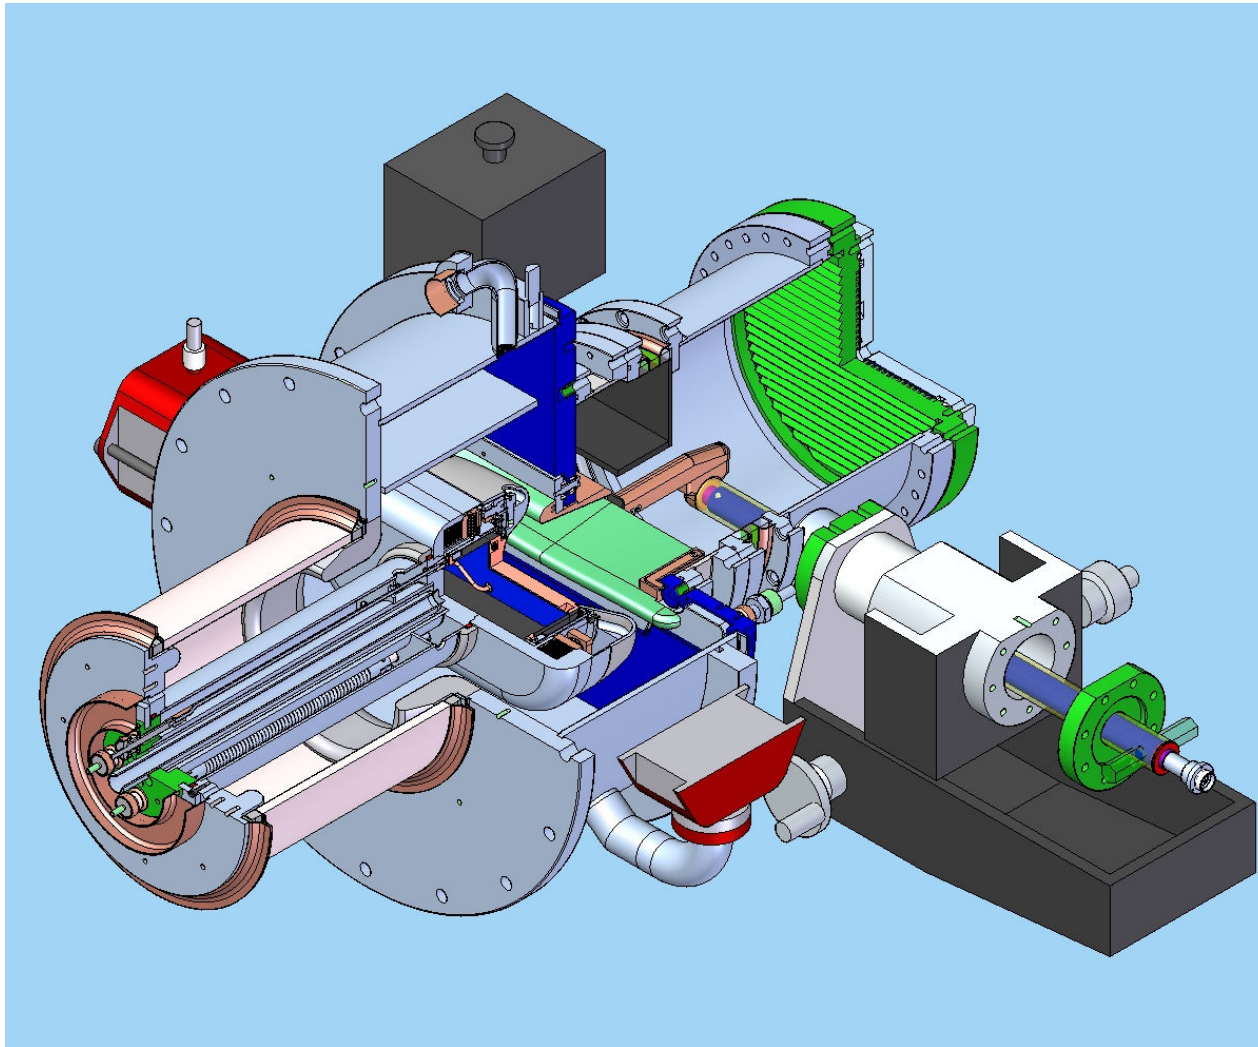



SBK Gun Test at SLAC Klystron Lab

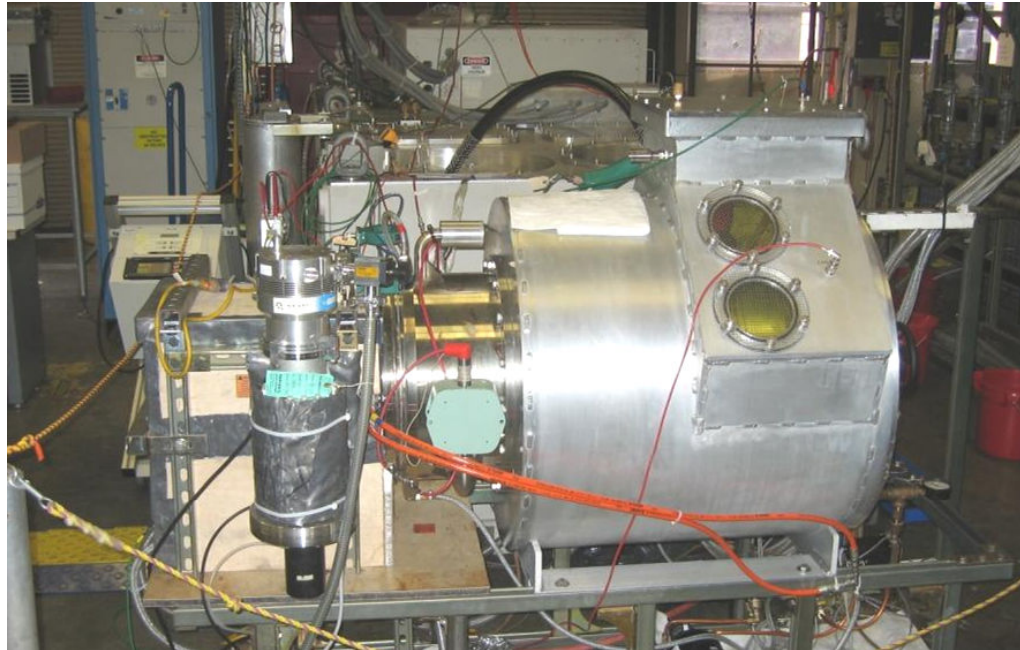

- Tested to 115kV with 1 us pulses at 1 Hz rep rate
 - No HV arcing
 - No RF gun oscillations
 - Perveance 10-20% higher than predicted – can be adjusted
- Discovered shorted focus electrode when attaching bias supply
 - Short found and repaired
 - Diode in preparation for re-installation at test stand


SBK Oscillation Test Device

- Identified oscillations in klystron design with permanent magnet focusing – will probably need > 600 G solenoidal focusing to suppress them.
- Building two cavity system to verify instability issues understood versus focusing strength before building full klystron

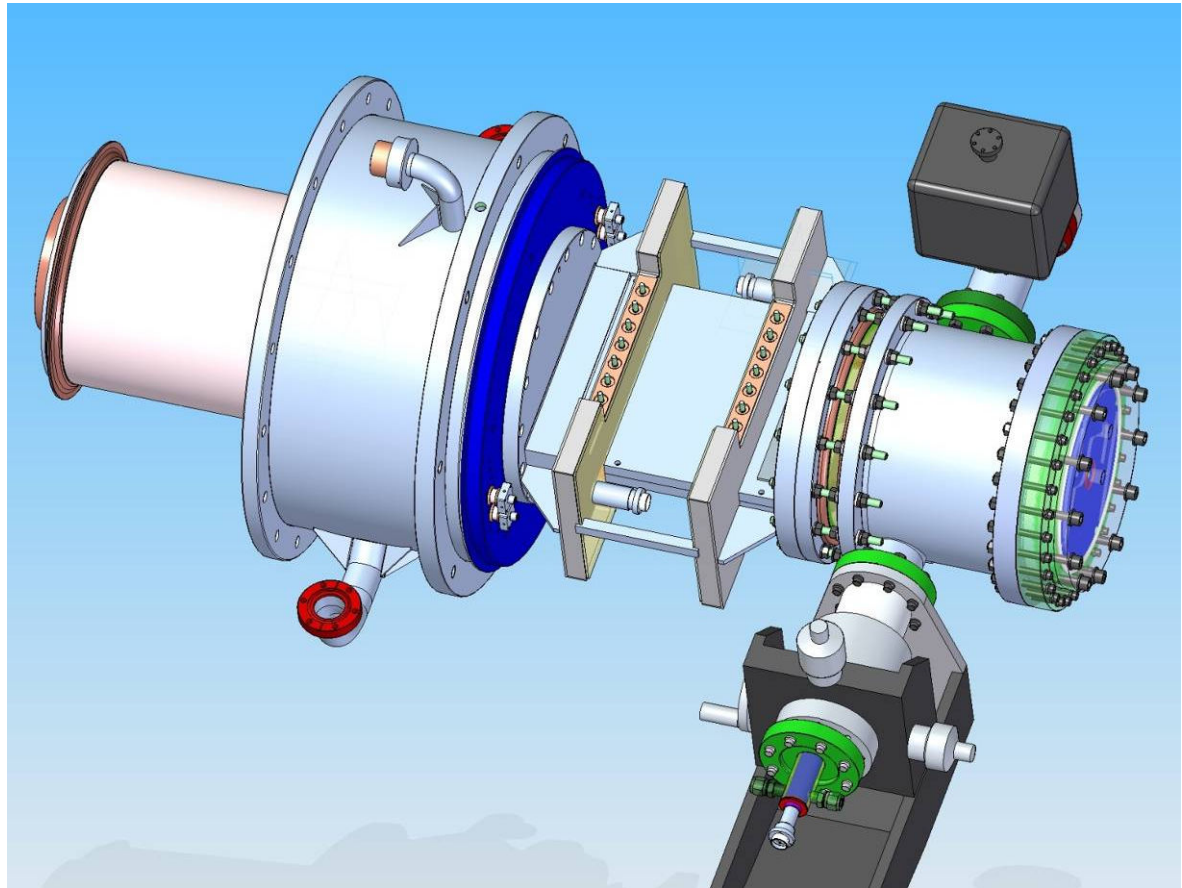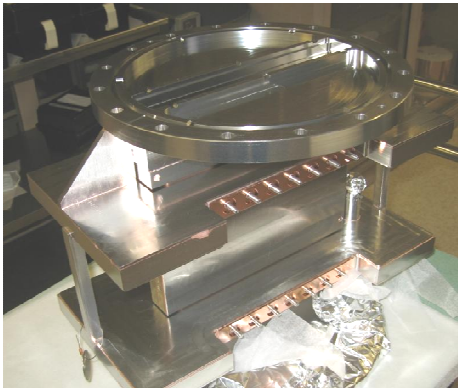

Klystron Cluster Layout

Surface rf power cluster building

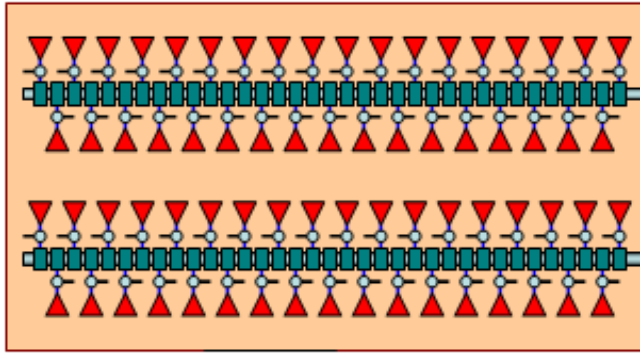


2 groups of ~35 10 MW klystrons & modulators clustered in a surface building

~350 MW combined into each of 2 overmoded, low-loss waveguides

Feeds ~2.5 km of linac total (up & downstream)

- Service tunnel eliminated
- Underground heat load greatly reduced



Accelerator Tunnel

CTO

TE₀₁ waveguide

WAVEGUIDE DISTRIBUTION SYSTEM

TAP-OFFS

WAVEGUIDE DISTRIBUTION SYSTEM

TAP-OFFS

WAVEGUIDE DISTRIBUTION SYSTEM

9 CAVITIES

4 CAVITIES QUAD 4 CAVITIES

3 CRYMODULES

37.956 m

9 CAVITIES

4 CAVITIES QUAD 4 CAVITIES

3 CRYMODULES

37.956 m

9 CAVITIES

4 CAVITIES QUAD 4 CAVITIES

3 CRYMODULES

37.956 m


9 CAVITIES

4 CAVITIES QUAD 4 CAVITIES

3 CRYMODULES

37.956 m


Test 350 MW Power Handling with Tapoff Feeding Resonant Line

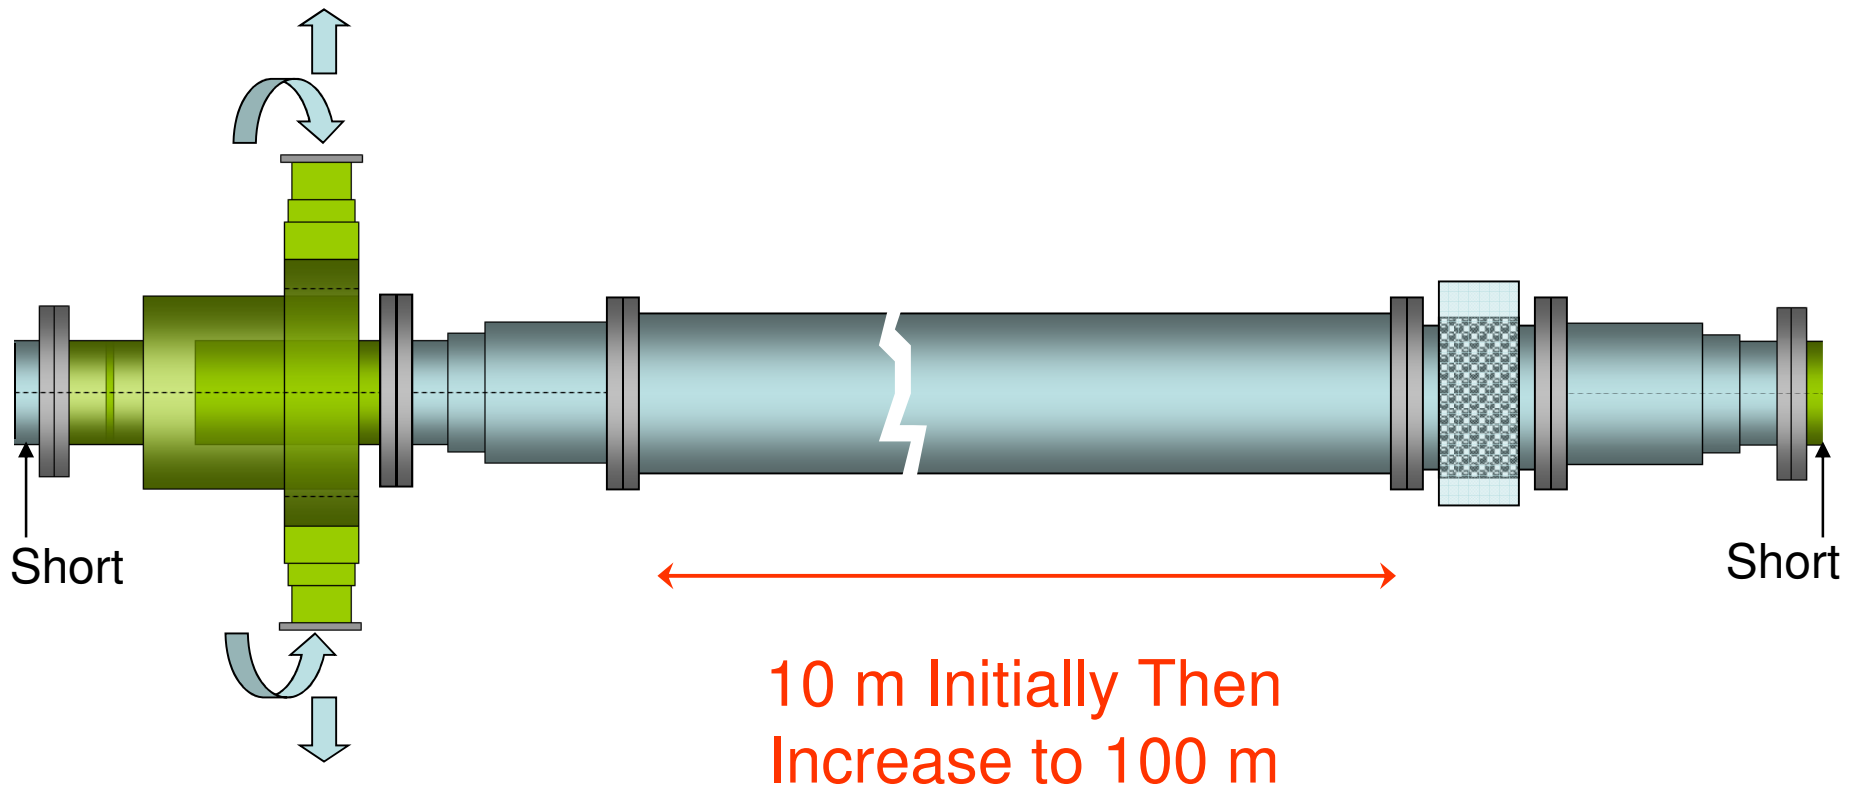

Coaxial Tap-Off (CTO)

with wrap-around power extraction

We have informal bids and will order two 3-dB CTO's soon.

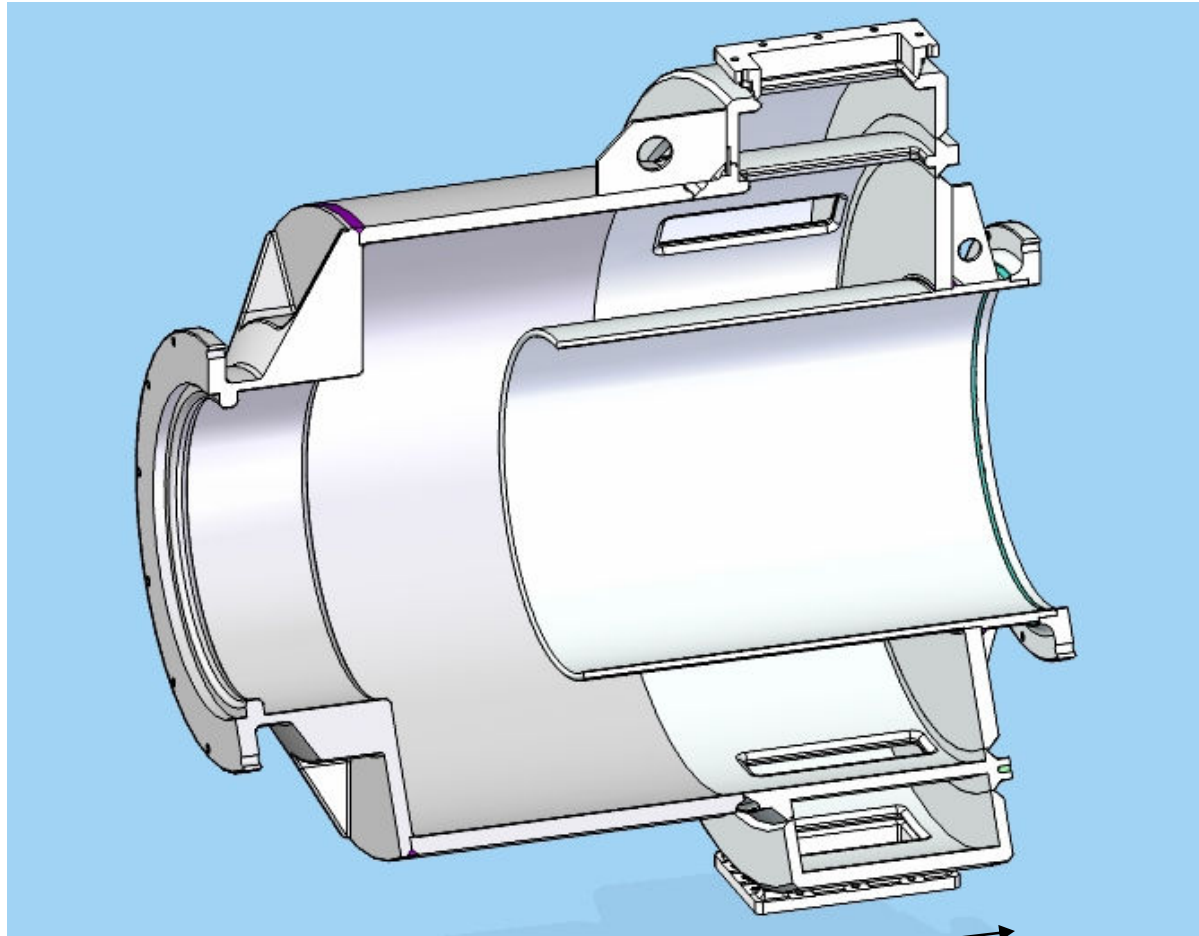

Aluminum,
Welded


0.9 m

mech. design: Gordon Bowden
drawing: Bob Reed

Main Waveguide ('Big Pipe')

We've placed an order for
4, 9.75 m sections
due in January 2010


aluminum,
formed & welded

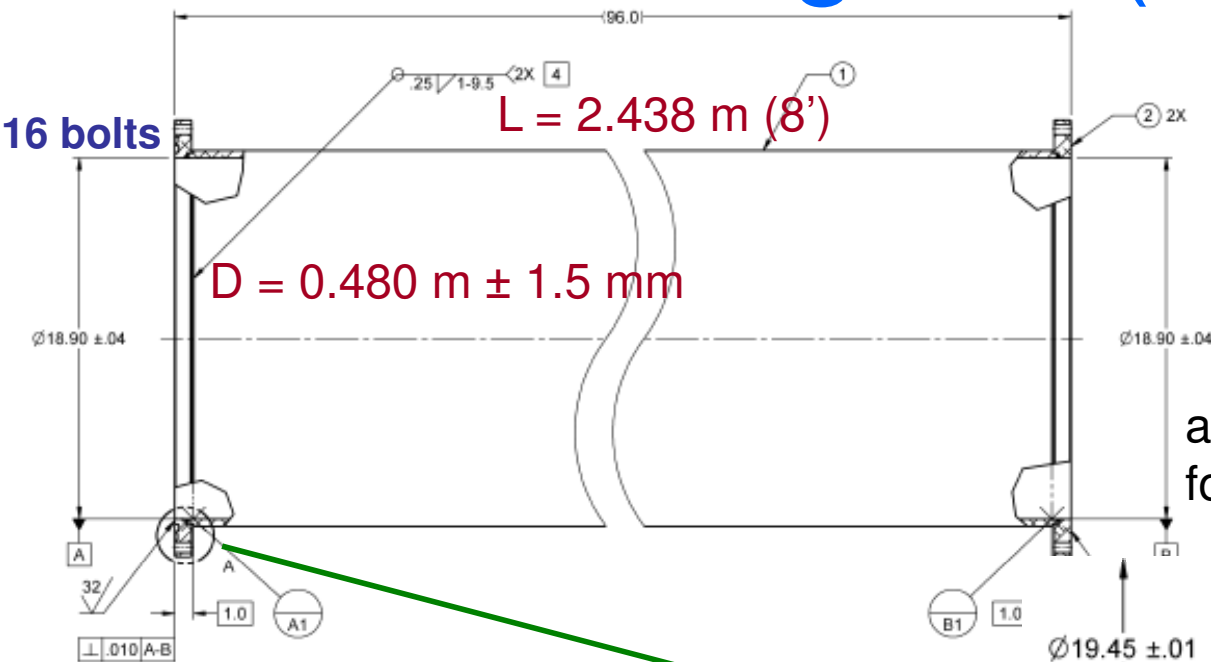

one-side double grooved flanges:

vacuum seal – Viton® fluoroelastomer
O-ring

rf back-up seal – Bal Seal® canted coil
contact spring

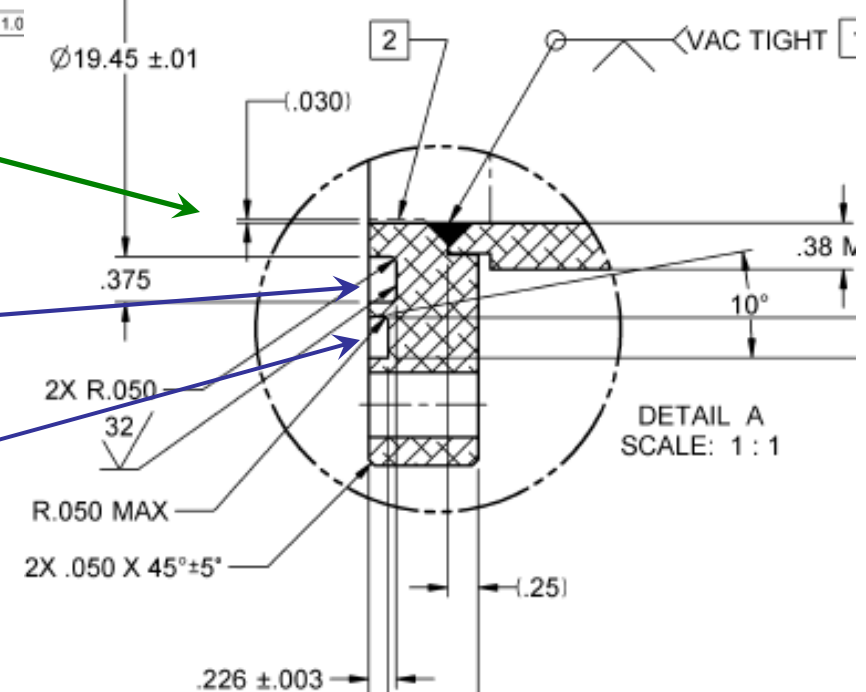


Distributed RF Scheme (DRFS)

Standard Scheme: One DC PS/MA modulator drives 26 klystrons (6 cryomodules)

High availability with backup DC PS and MA modulator


Maximum efficient usage of SC cavity

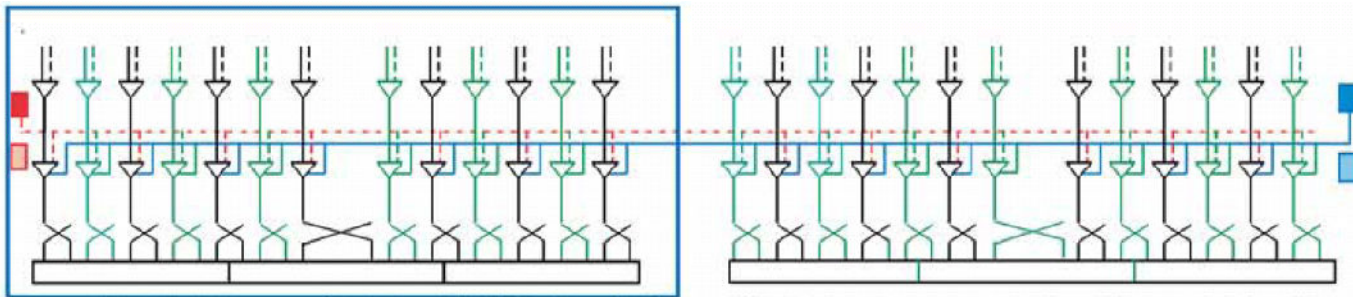


Low Power Option

Low Power Option

Aiming for the easy upgradeability to standard scheme
Low cost
Partial sacrifice of DRFS operability

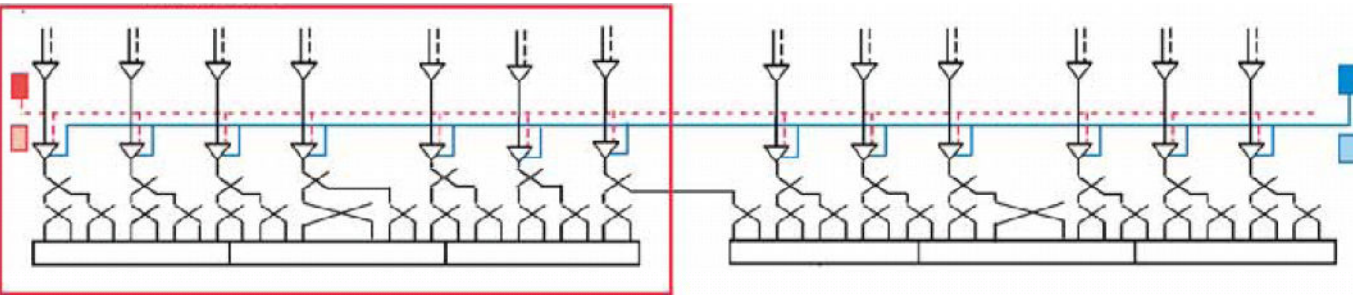

Modulator in Full Power Scheme

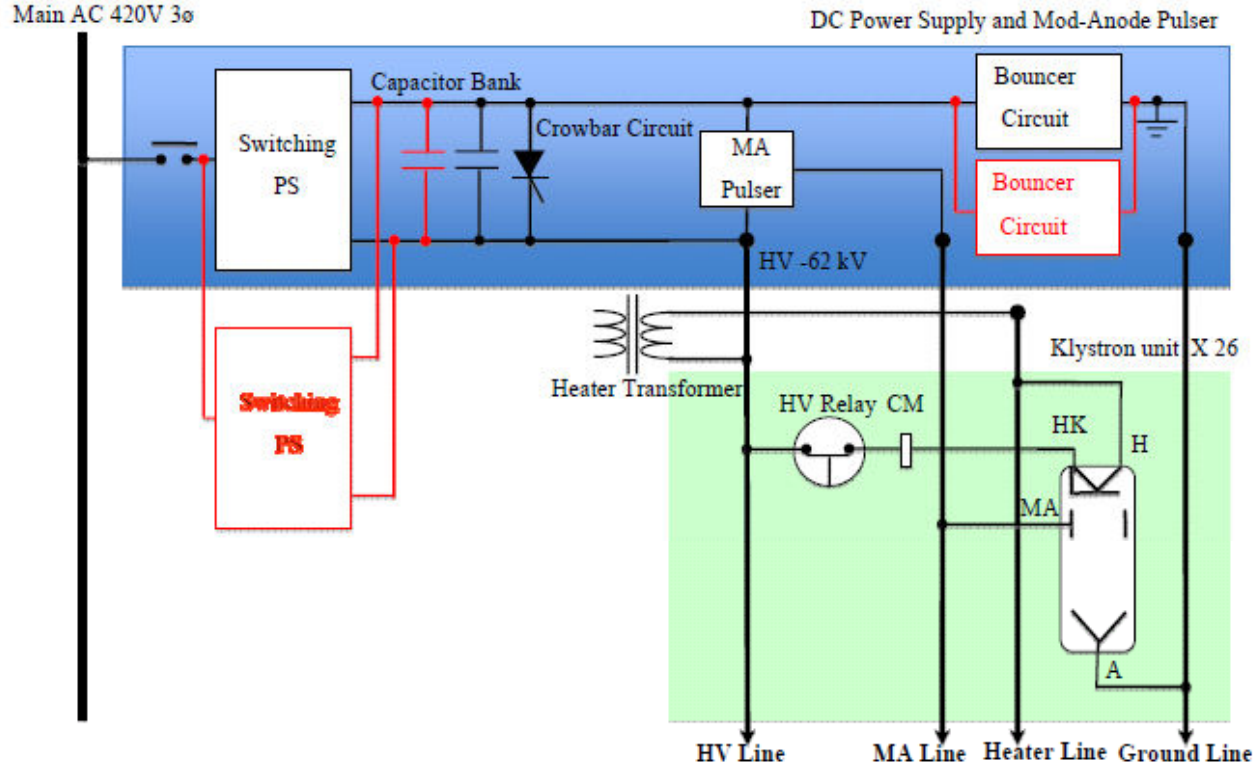

- | Items | No | MTBF (hrs) |
|----------------------------|-------------|---------------------------|
| DC Power Supply | 1 | 50,000 |
| possibly having redundancy | +1(Back-up) | >100,000 (Failure free/y) |
| Modulating Anode Modulator | 1 | 70,000 |
| possibly having redundancy | +1(Back-up) | >100,000 (Failure free/y) |
| MA Klystron | 13 | 110,000-120,000 |
- (KEK's recent 10 years data)

DRFS R&D Schedule at KEK


- Task force team of DRFS starts and try to solve the problems of DRFS.
- Prototype RF unit is manufactured in FY09
- Further R&D required for the DRFS RF system is continued in FY09
- Prototype will be evaluated in the S1 global test
- And then install in the buncher section of STF-II aiming for the realistic operation.
- After fixing the scheme, collaborative CFS work and realistic cost estimation will be performed in FY09.
- Evaluation of vibration of cryomodules due to the hanging-down structure from ceiling is planed.




	FY2009				FY2010				FY2011			
	Apr-09	Jul-09	Oct-09	Jan-10	Apr-10	Jul-10	Oct-10	Jan-11	Apr-11	Jul-11	Oct-11	Jan-12
LC Schedule												
KEK Schedule												
MA Klystron #1		Design	#1 MA Kly Manufacturing		Test				S1 Global DRFS Install			
MA Modulator #1		Design	#1 Manufacture									
DC Power supply #1		Design	#1 Manufacture									
PDS of #1			Manufacture									
MA Klystron #2			Design					#2 MA Kly Manufacturing				

DRFS Full Power Layout


5.2m diameter

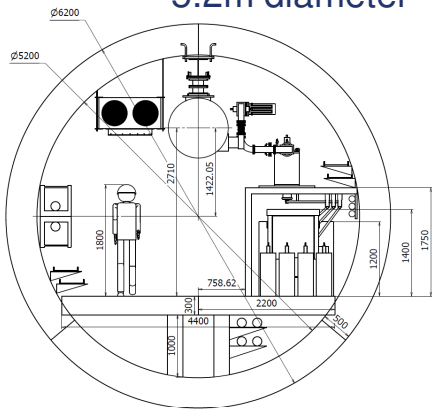

Components Size


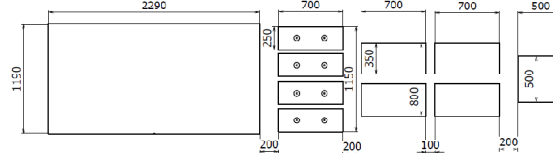


DC power Supply




LLRF Rack

MA Modulator Rack




Control Rack

Full Scheme to Half Option

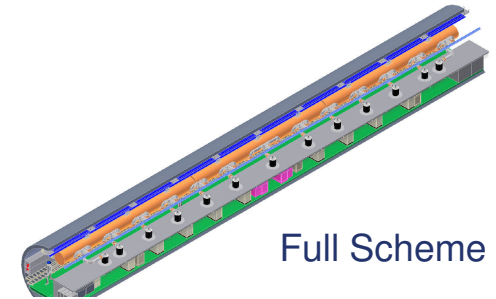


Full Scheme

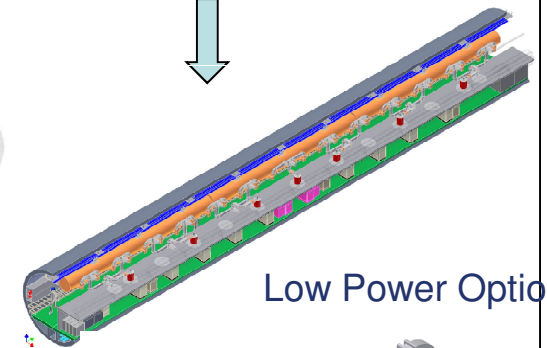


Low Power Option


Example of LowP PDS Layout

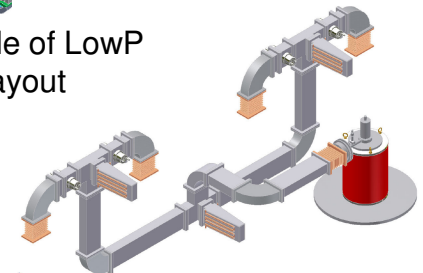

Add klystron in future

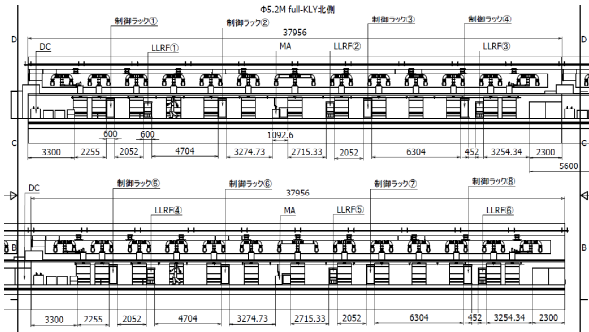


2 RDR-RF units Layout

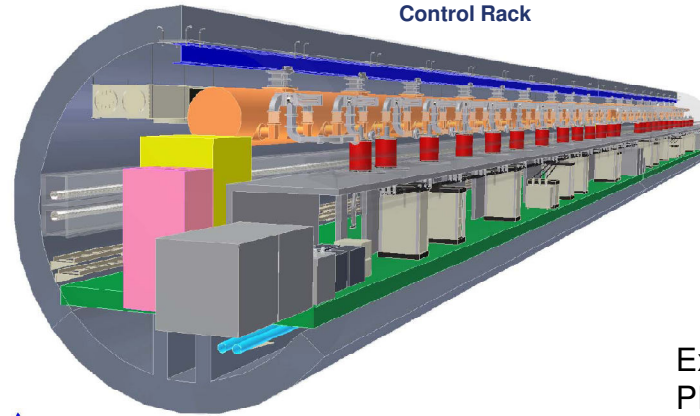

3D View of DRFS




Availsim Results

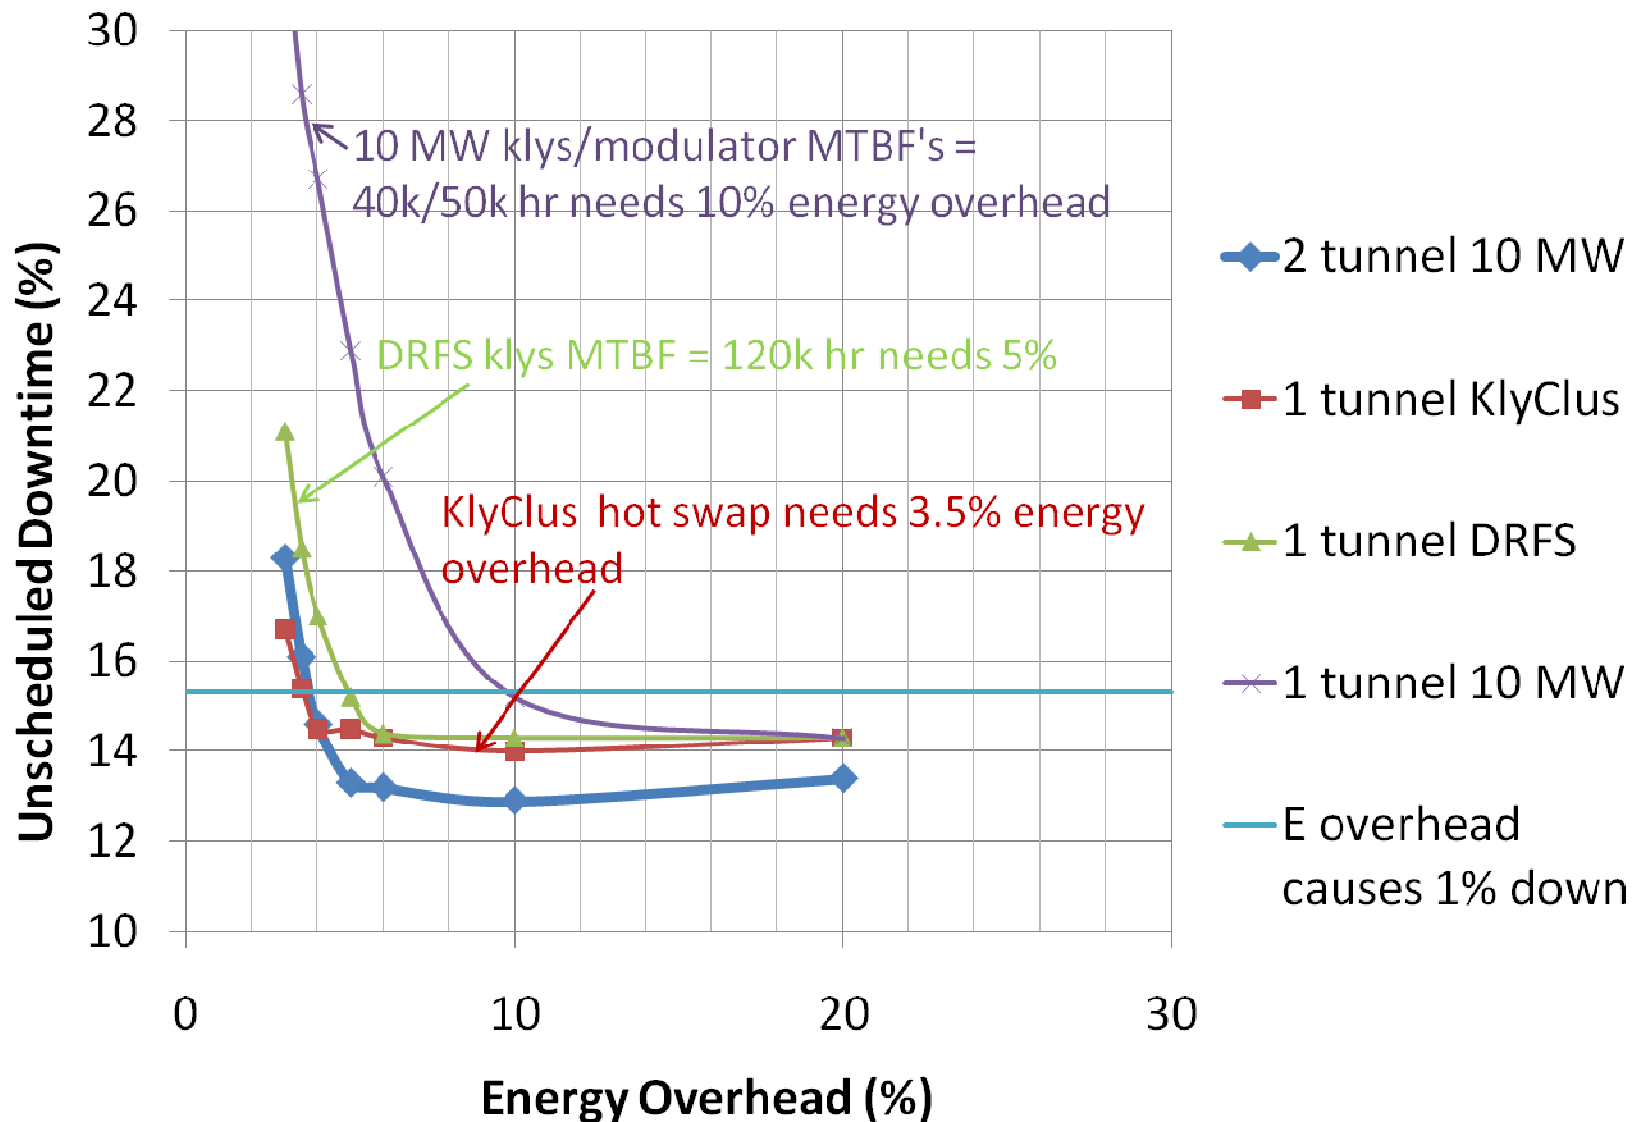


HLRF Issues

- DRFS
 - Klystron lifetime
 - Modulator cost with redundancy
 - Layout (map RDR components into single tunnel) and issues of ceiling mounted CM
 - Extensive radiation shielding
- Klystron Cluster
 - RF breakdown in transmission line
 - Cost of transmission line and vacuum -vs- pressurized operation
 - LLRF control

Flattop Operation with a Spread of Cavity Gradients

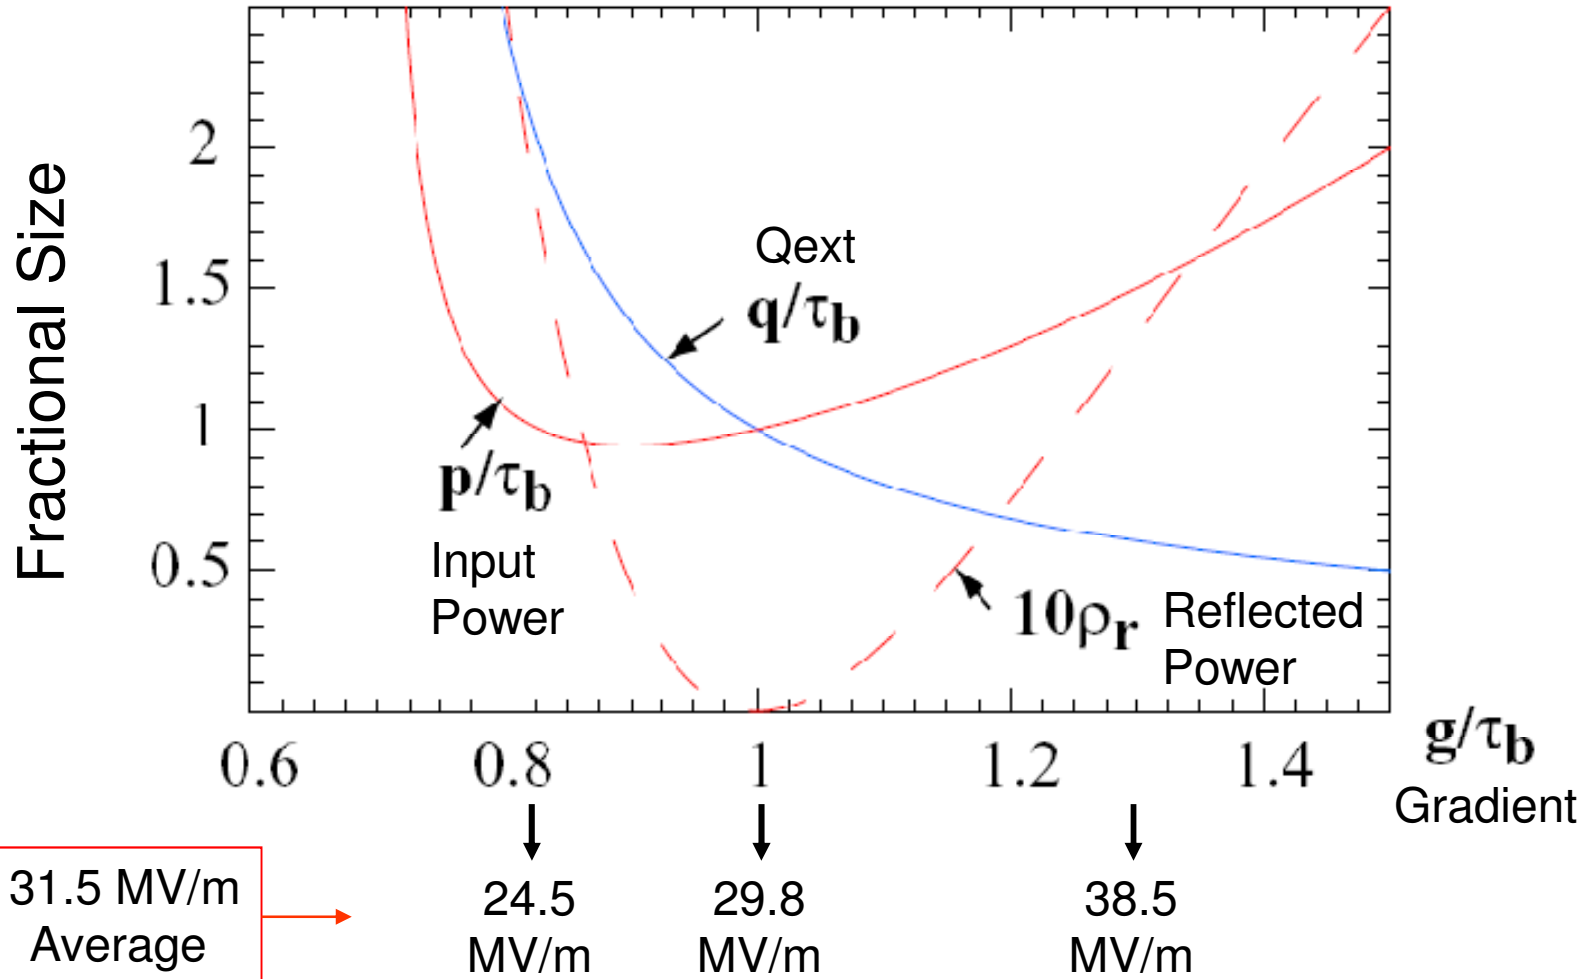

New SLAC Power Splitter

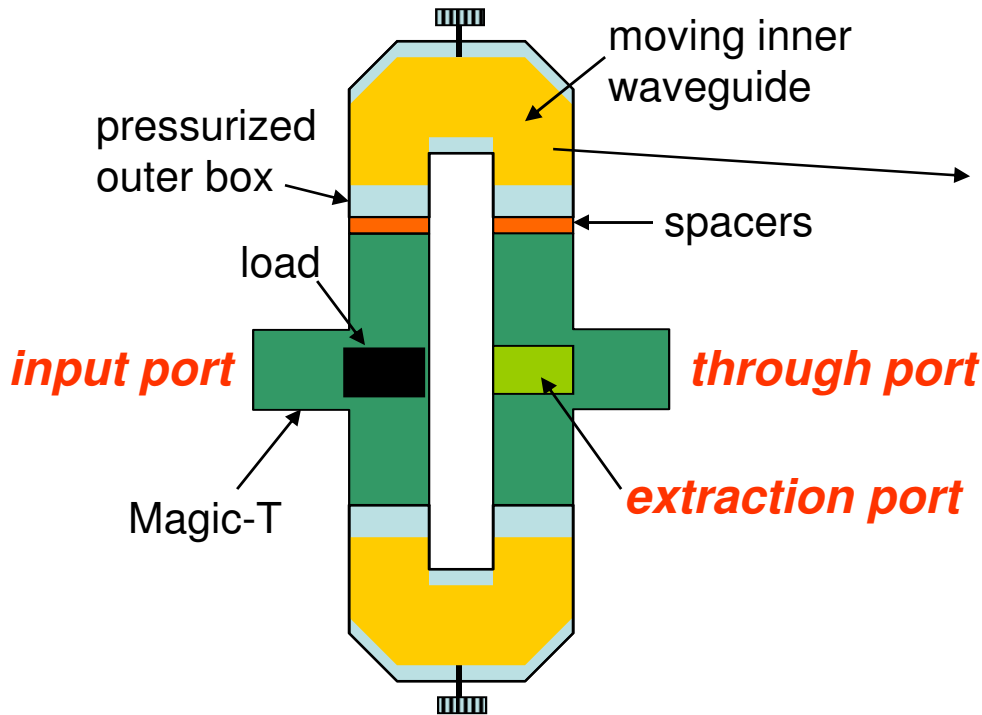

- Input and through ports are in-line
- Trombone phase shifters take advantage of required U-bends
- Match of phase shifters nominally unaffected by position

New KEK Power Splitter



Left: 140 Deg Phase Shifter Prototype - tested successfully to 3 MW

Right: Adjustable hybrid power splitter using a phase shifter design similar to that shown on the left

