




European Organization for Nuclear Research



# STABILIZATION ACHIEVEMENTS AND PLANS FOR TDR PHASE

CLIC MAIN BEAM QUADRUPOLE MECHANICAL STABILIZATION

**K. Artoos**, C. Collette, P. Fernandez Carmona, M. Guinchard,  
C. Hauviller, S. Janssens, A. Kuzmin, R. Leuxe, A. Slaathaug.


Collaboration Stabilisation WG, participations from:



The research leading to these results has received funding from the European Commission under the FP7 Research Infrastructures project EuCARD



# Outline



2

- Requirements
- Characterisation vibration sources
- Strategy stabilisation
- Four steps towards feasibility demonstration: achievements
- Summary and future work

## 3992 CLIC Main Beam Quadrupoles:

Four types :


Mass:  $\sim 100$  to  $400$  kg

Length:  $500$  to  $2000$  mm


**Stability (magnetic axis):**

$$\sigma_x(f) = \sqrt{\int_f^\infty \Phi_x(\nu) d\nu}$$

	Main beam quadrupoles
Vertical	<b><math>1.5 \text{ nm} &gt; 1 \text{ Hz}</math></b> (1 nm)
Lateral	<b><math>5 \text{ nm} &gt; 1 \text{ Hz}</math></b>


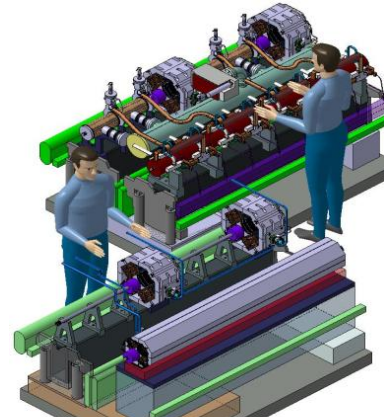


Type 4: 2m, 400 kg

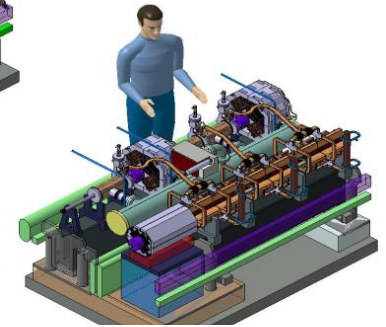


Type 1: 0.5 m, 100 kg

A. Samoshkin

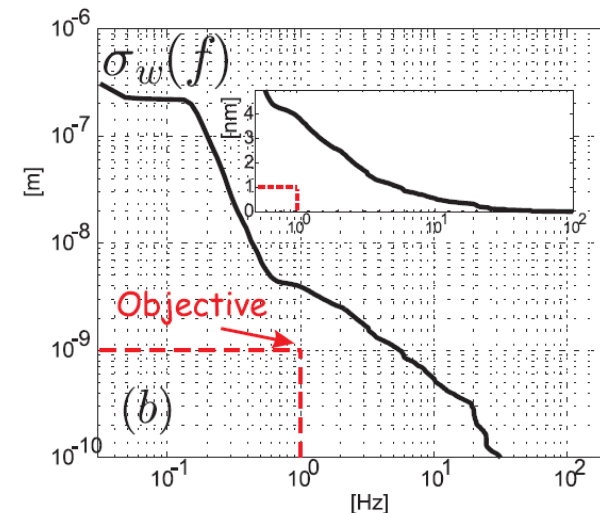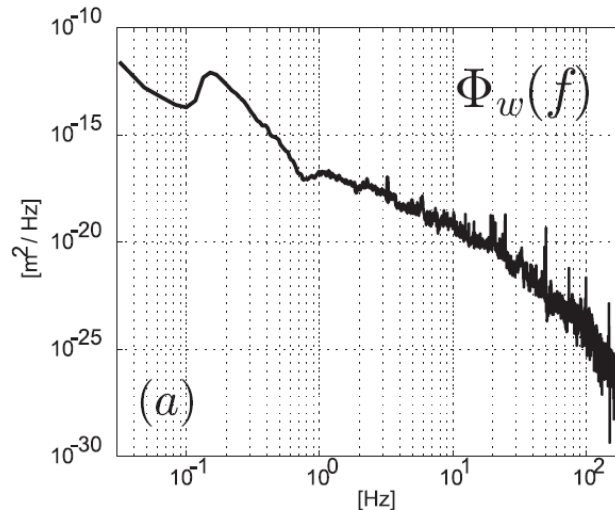



# Characterisation vibration sources



4

Measurements LAPP, DESY, SLAC

Broadband seismometers characterisation



More measurements by CERN in accelerator environments



LHC



CesrTA




SLS





CLEX



CMS

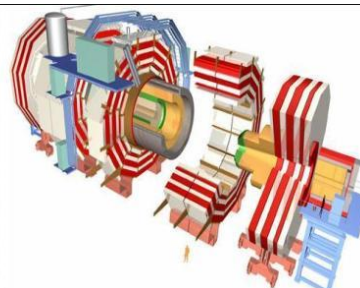


ISR

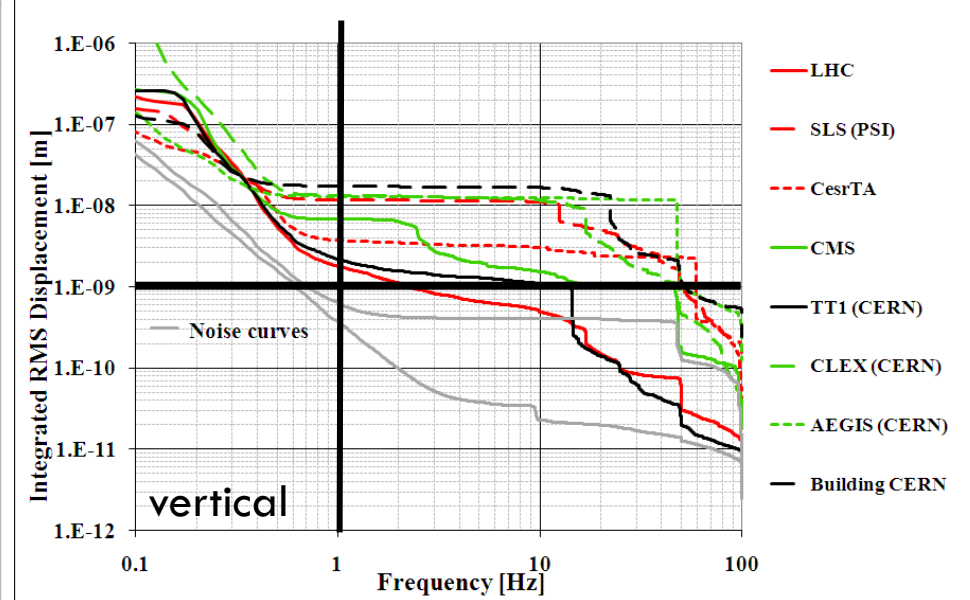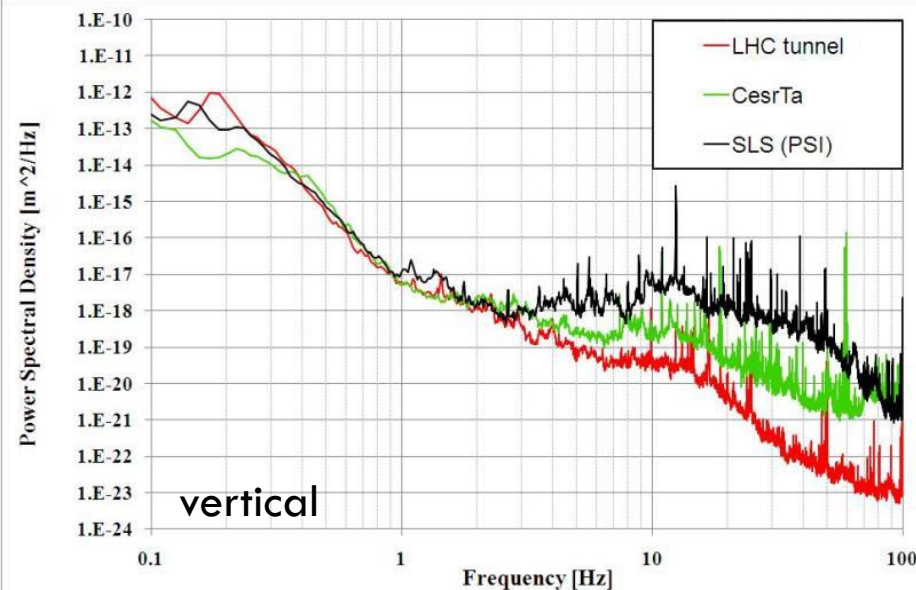


- Running accelerator in deep tunnel comparable to LHC:
- **between 2 and 5 nm** ground vertical integrated R.M.S. displacement
- Amplitude to be reduced by a **factor 4-5** in frequency range **1-20 Hz**
- **Above 20 Hz** contribution to integrated RMS is **small**
- Updated ground motion model with technical noise



- Ground vibrations: seismic back ground + technical noise  
**broadband excitation decreasing with increasing frequency**
- Avoid amplification vibrations at resonances with low frequency
  - Stiff magnet and components
  - Stiff alignment stage
  - Low beam height
- Vibrations are attenuated in a concrete floor over distance
- Vibrations acting directly on the magnet:
  - Water cooling
  - Vacuum and vacuum pipes
  - Ventilation
  - Acoustic noise




**First part STRATEGY: adapt accelerator environment to stability requirements**

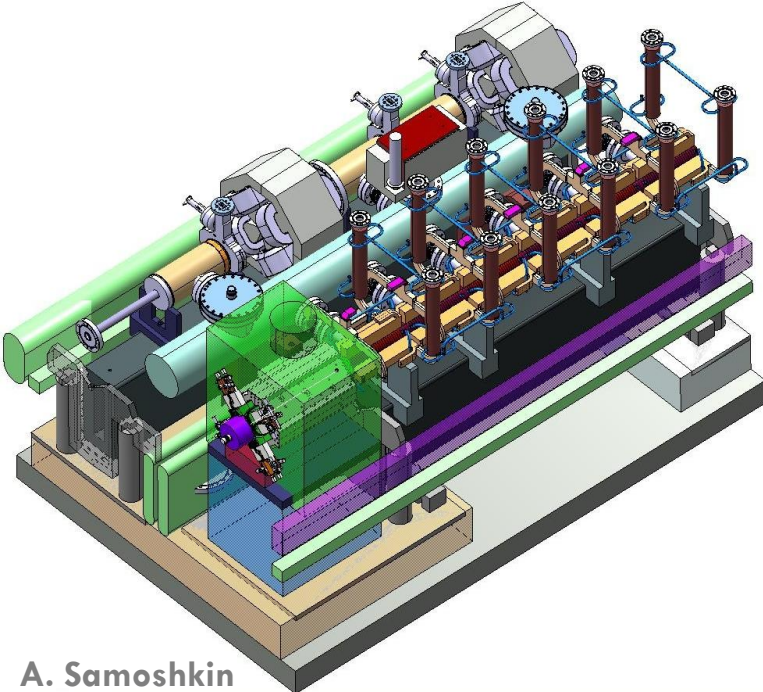

A. Samoshkin

## Stiffness-Robustness

- Applied forces
- Compatibility alignment
- Uncertainty
- (Transportability)



## Strategy STIFF support

*Ref. Presentation Chr. Collette*

## Available space

Integration in two beam module




620 mm beam height

## Accelerator environment

- High radiation
- Stray magnetic field

- Stiff structure
- At least four d.o.f.
- Precise motion
- Repeatability
- 0.1 nm resolution vertically


**Parallel structure**  
**Stiff piezo actuators**  
**Flexural hinges**

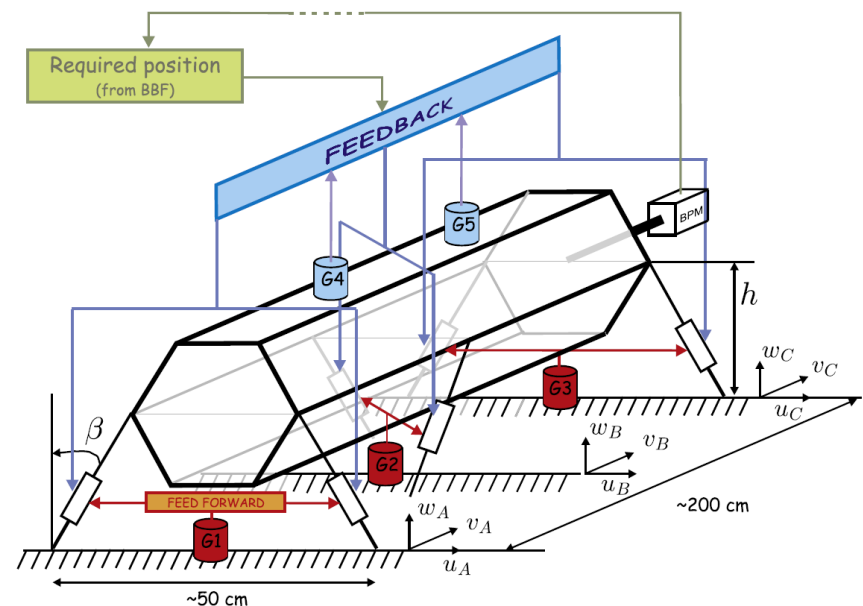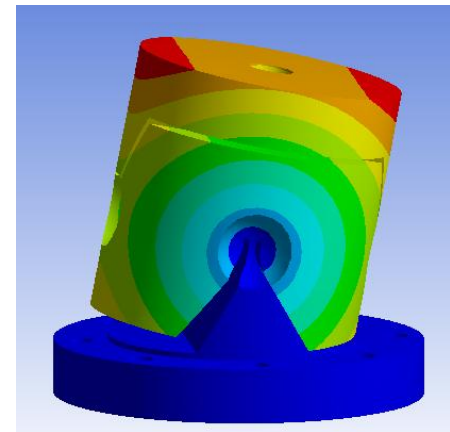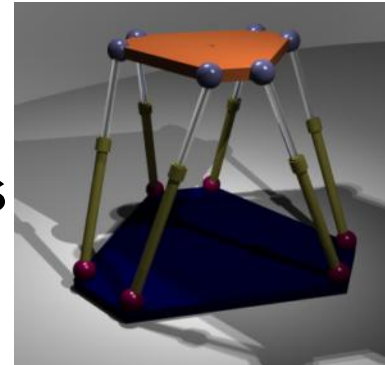

Sensors : Seismometers “to get started”




# Structural stiffness




## Induced stresses in piezo

## Inclination



## Resolution, structure stiffness, forces

## Number







# D.O.F. , COST  
Resonant frequency  
Solution 4 types



Block longitudinal  
Block roll

## X-Y flexural guide

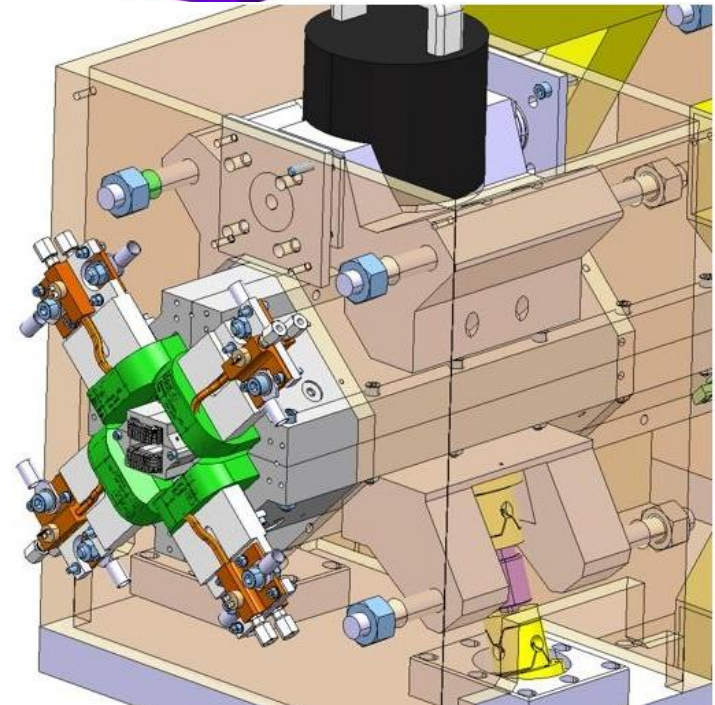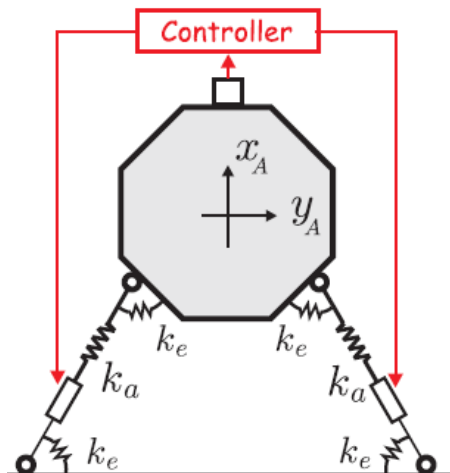

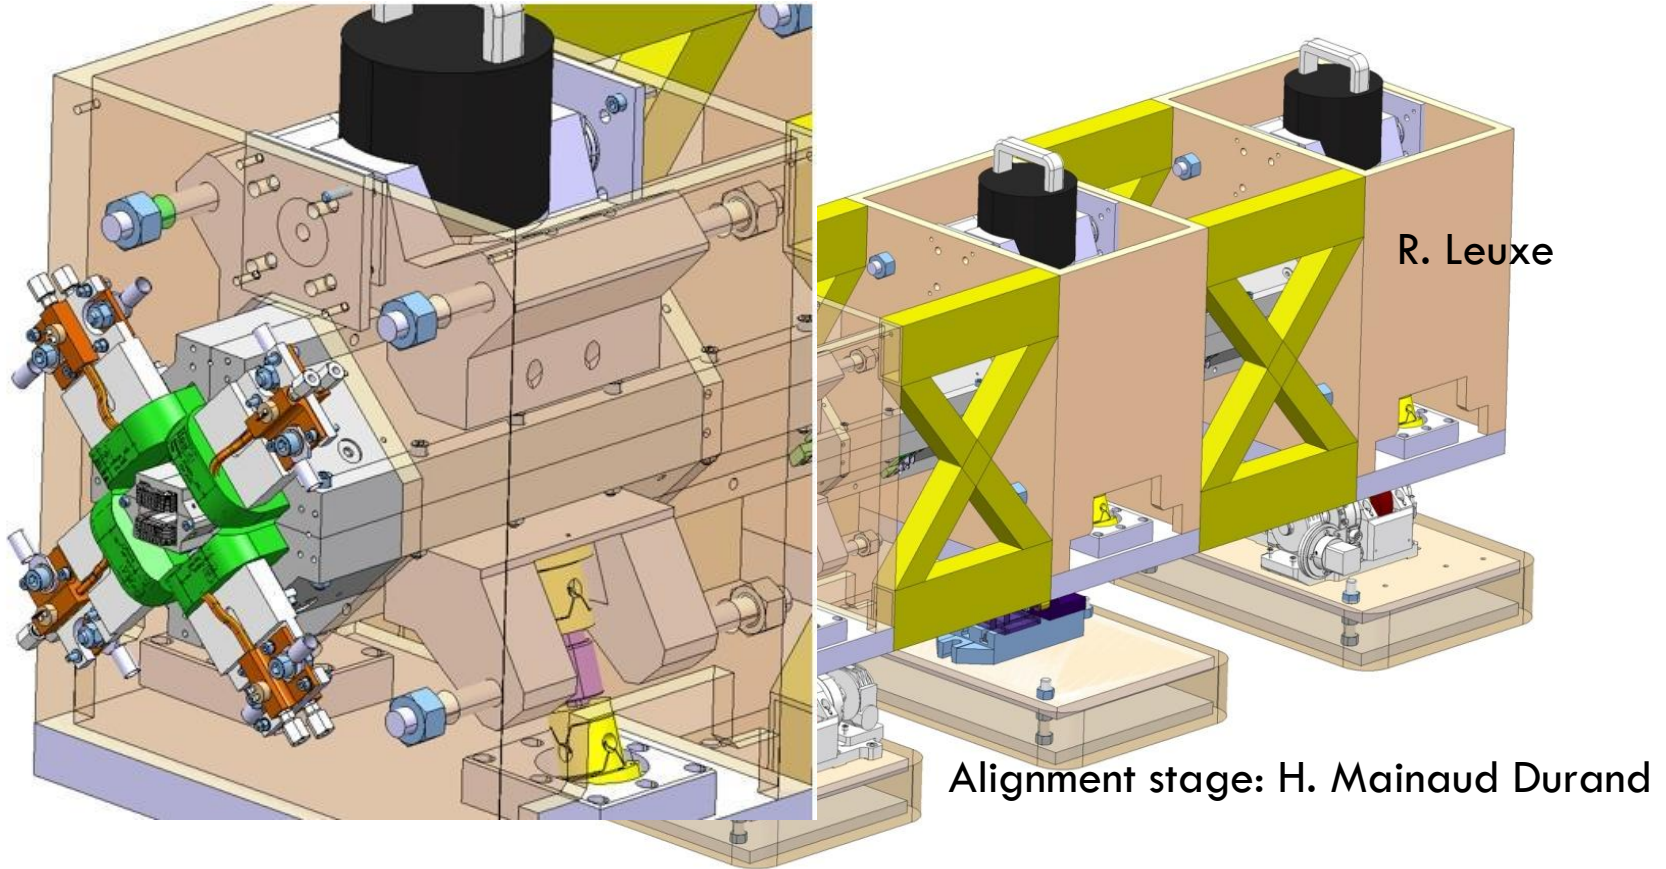


Stiff intermediate girder between alignment and stabilisation  
Lockable in longitudinal direction (transport)

## « Nano-positioning» proposal

Modify position quadrupole in between pulses ( $\sim 5$  ms)

Range  $5 \mu\text{m}$ , increments 10 to 50 nm, precision 1 nm

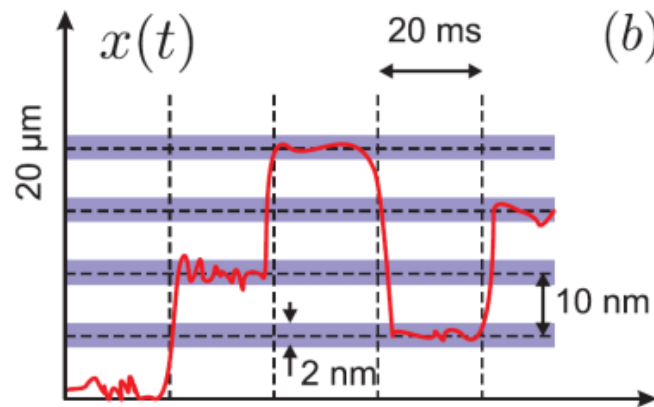

- In addition/ alternative dipole correctors
- Increases time to next realignment with cams

Compatible with pre-alignment ??

# Additional objectives


12

## NANOMETROLOGY and introduction REFERENCE position

- **Measurement of the x-y displacement** with respect to intermediate platform (**fiducials**)


Nanometre resolution

- Instrumentation in actuator legs
- Capacitive gauges in x-x guide
- Optical linear encoders with gratings in x-y guide (Introduction hardware reference position)

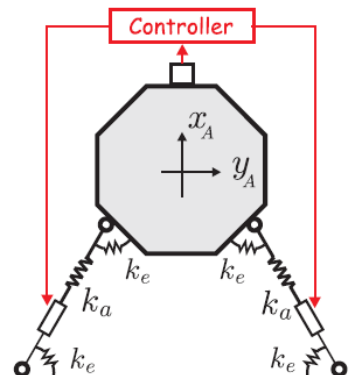



# 4 steps toward demonstration



13


2010 : 4 steps toward demonstration on MBQ type 4 (+ type 1):

- ▣ 1. Stabilisation **1 d.o.f. with small weight** (“membrane”)
- ▣ 2. Stabilisation **1 d.o.f. with type 1 weight** (“tripod”)
- ▣ 3. Stabilisation **2 d.o.f. with type 1 weight** (“quadriped”)
- ▣ 4. Stabilisation of **type 4 (and type 1)CLIC MB quadrupole proto type**





# 4 steps toward demonstration




14

2010 : 4 steps toward demonstration on MBQ type 4 (+ type 1):


- ▣ 1. Stabilisation **1 d.o.f. with small weight** (“membrane”)
- ▣ 2. Stabilisation 1 d.o.f. with type 1 weight (“tripod”)
- ▣ 3. Stabilisation 2 d.o.f. with type 1 weight (“tripod”)
- ▣ 4. Stabilisation of type 4 (and type 1)CLIC MB quadrupole proto type

# Step 1: One d.o.f. scaled set-up

15

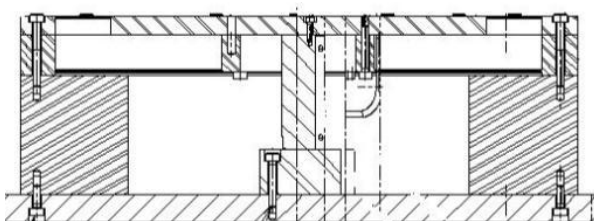


$$\frac{k}{m} = \frac{k'}{m'}$$


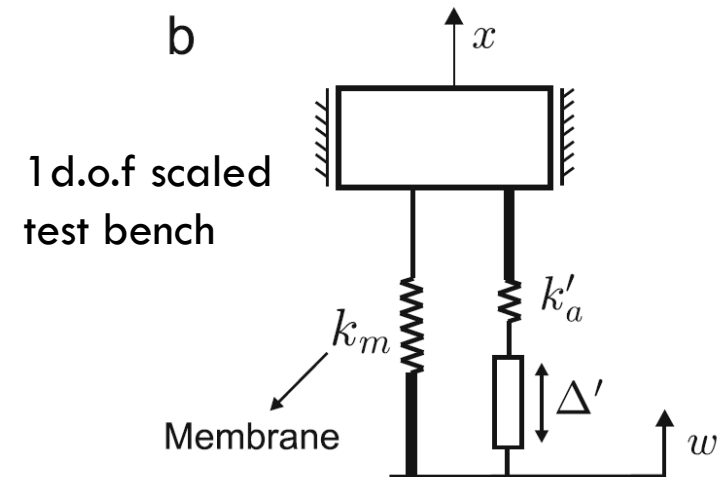


COLLETTE C., ARTOOS K., KUZMIN A., SYLTE M., GUINCHARD M. and HAUVILLER C., Active quadrupole stabilization for future linear particle colliders, *Nuclear instruments and methods in physics research section A*, vol.621 (1-3) pp.71-78 (2010).

16

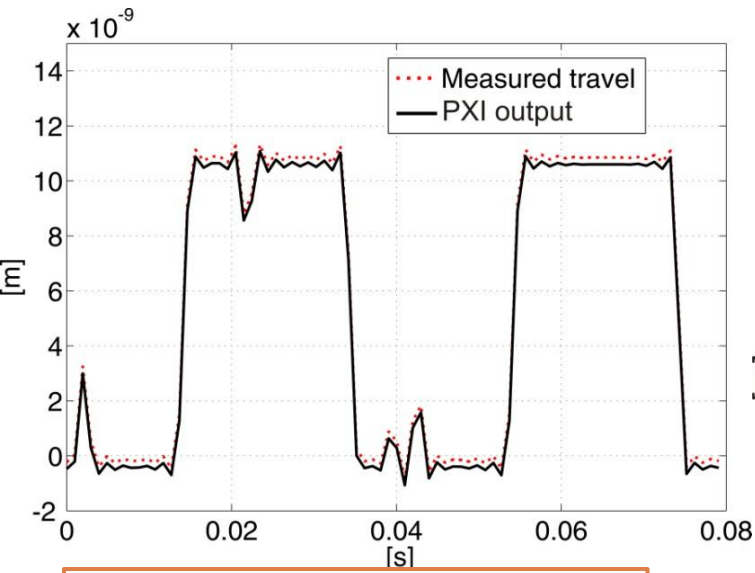


**Objectives reached**

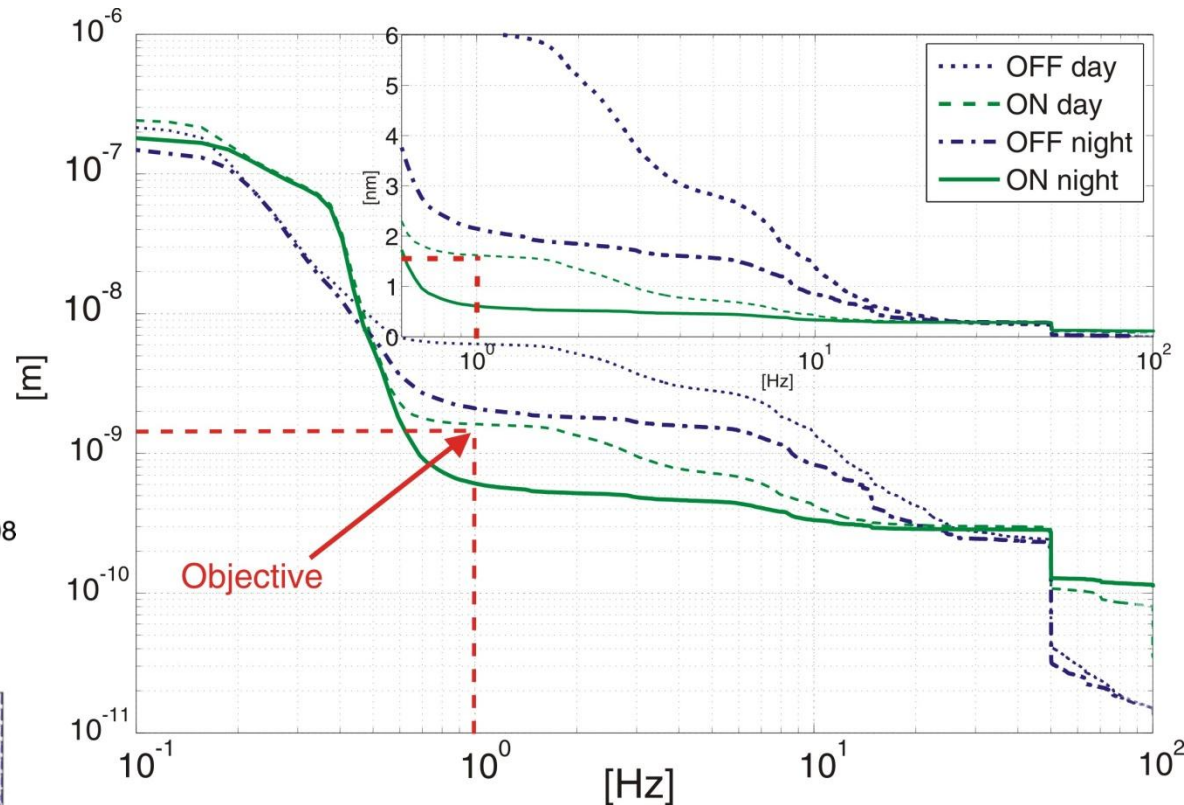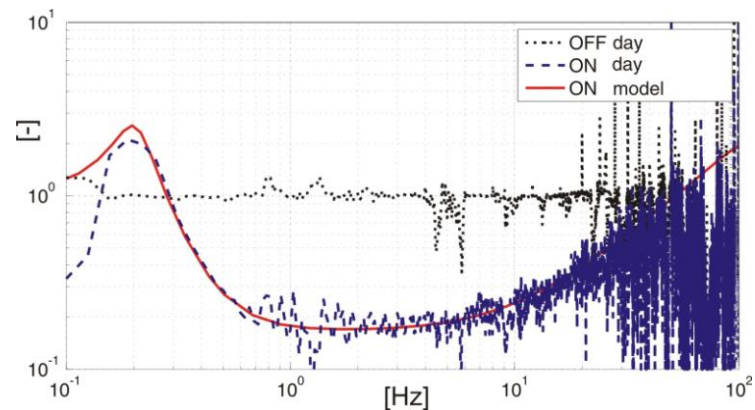

Result: 0.6 nm at 1 Hz from 2.2 nm  
day: 1.6 nm from 6.4 nm  
0.44 nm at 4 Hz



# Controller hardware



17

**Controller:** Experimental validation with NI PXI 8106 RT + M series acquisition

Piezo amplifiers

Power supply and conditioners instrumentation

Main requirements:

High resolution (18 bit)  
+ Low noise

Small latency

*Radiation hard*


Short cables + optimisation screening  
and cable paths

*Local controllers*

*Screened rack space ?*



# 4 steps toward demonstration




18

## 2010 : 4 steps toward demonstration on MBQ type 4 (+ type 1):


- ▣ 1. Stabilisation 1 d.o.f. with small weight (“membrane”)
- ▣ 2. Stabilisation 1 d.o.f. with type 1 weight (“tripod”)
- ▣ 3. Stabilisation **2 d.o.f. with type 1 weight** (“tripod”)
- ▣ 4. Stabilisation of type 4 (and type 1) CLIC MB quadrupole proto type



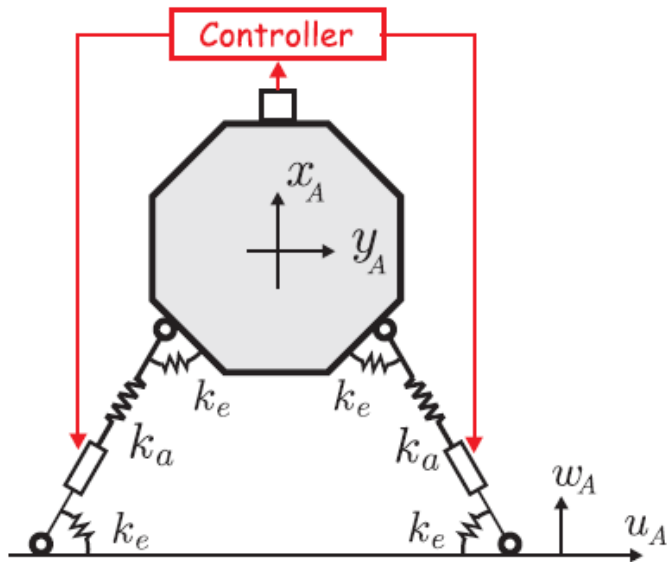


## Objectives:


- Validate the strategy and controller in 2 d.o.f.
- Validate flexural hinge design
- Validate Mounting and assembly issues
- Validate nano positioning in 2 d.o.f.

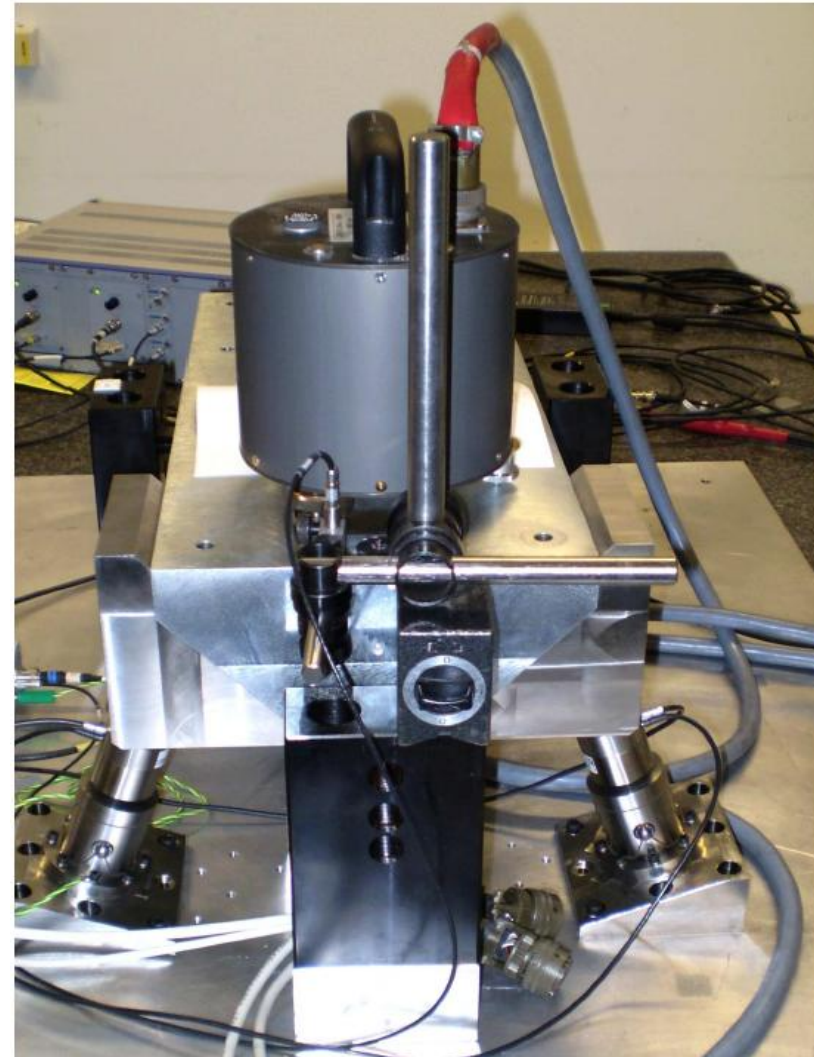


# Stabilization in 2 d.o.f.



20

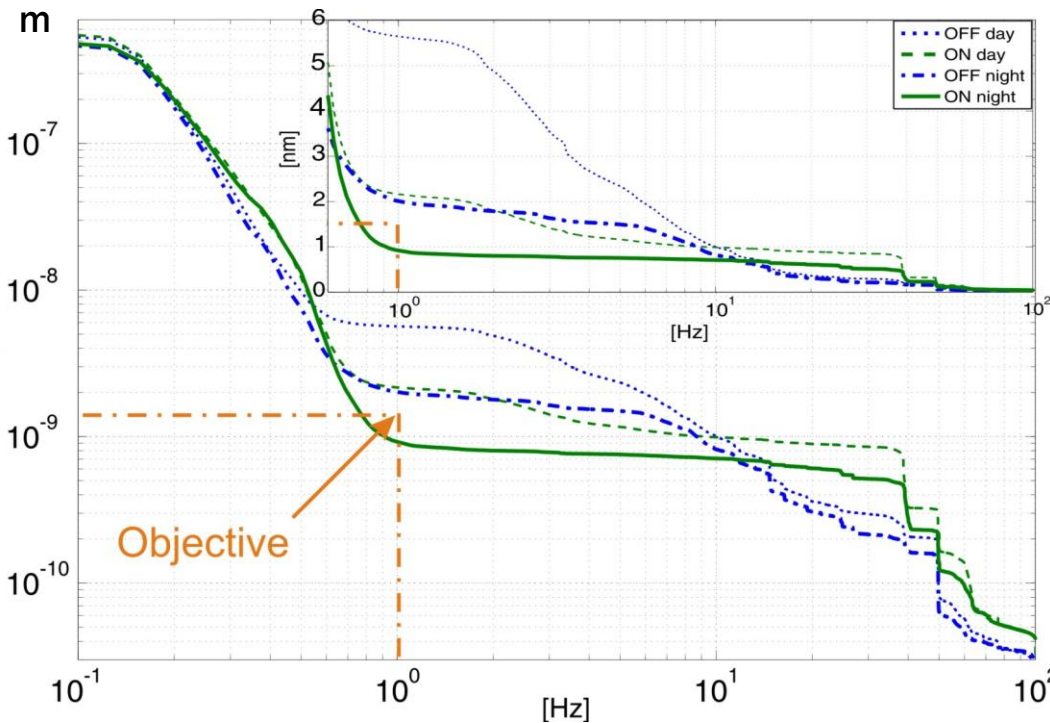


0.9 nm at 1 Hz  
Can be improved still.

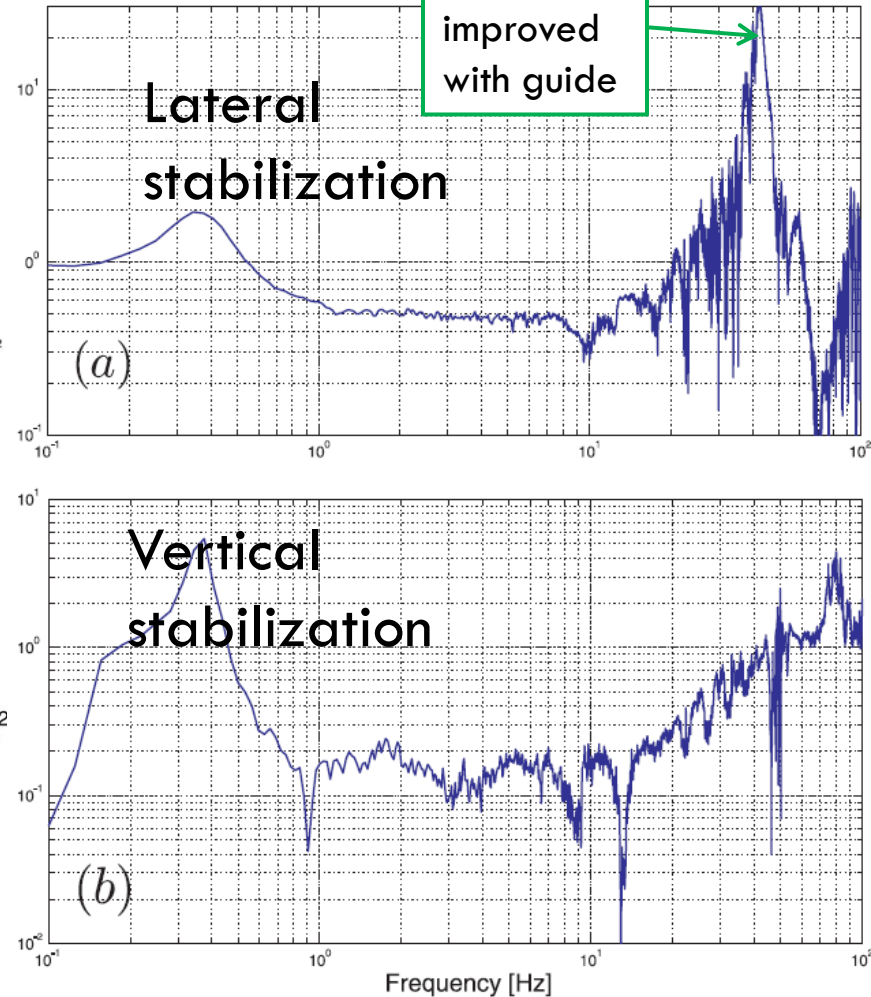

# Positioning in 2 d.o.f.

21

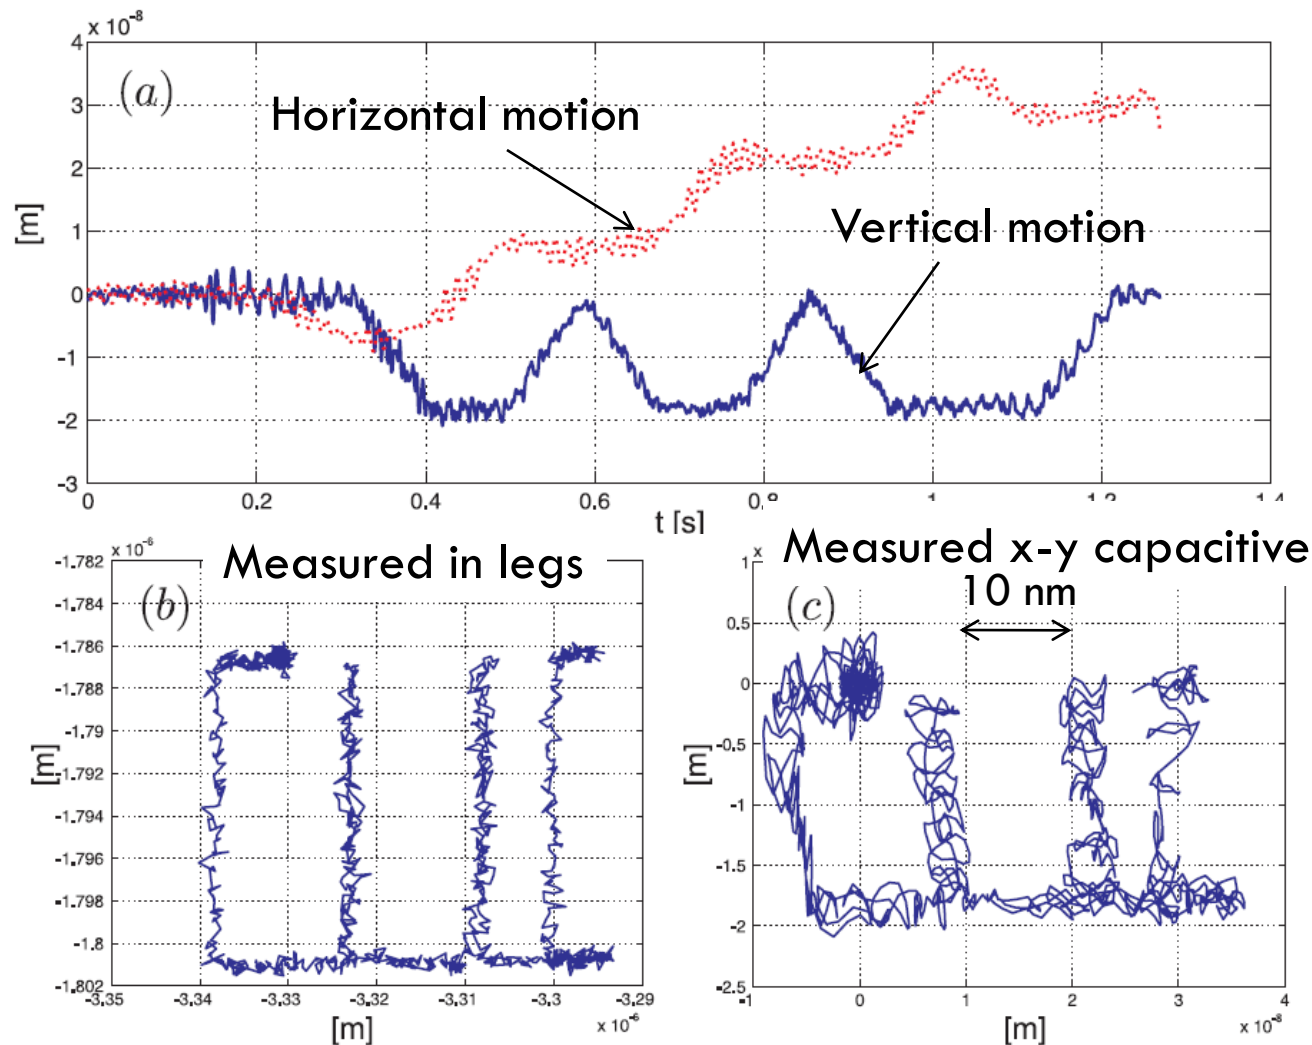

- With STRATEGY **STIFF** stabilisation support based on parallel piezo actuator structure:
- We DEMONSTRATED in a **model** and on **test benches** the **technical feasibility** to stabilise better than the required level at 1 Hz in two d.o.f., from levels that were characterised in a running accelerator in a deep tunnel (LHC). This **with commercially available components**.
- We demonstrated **nano positioning** in two d.o.f.
- We have a concept design of the stabilisation support based on the validated actuator pair with flexural hinges.
- Compatible with module requirements and alignment and robust against external forces

- Characterise further the technical noise and propagation in CLIC test modules + test water cooling on MBQ
- Implement the concept design for the stabilisation support + optimise for each magnet type (#legs>cost)
- Improve the stabilisation controller and sensor: stability and resolution, see talk Chr. Collette
- Adapt and test in accelerator environment + with independent demonstrator (optical, with beam)
- Through collaborations

*Thank you!*



- COLLETTE C., ARTOOS K., KUZMIN A., SYLTE M., GUINCHARD M. and HAUVILLER C., Active quadrupole stabilization for future linear particle colliders, *Nuclear instruments and methods in physics research section A*, vol.621 (1-3) pp.71-78 (2010).
- COLLETTE C., ARTOOS K., GUINCHARD M. and HAUVILLER C., Seismic response of linear accelerators, *Physical reviews special topics – accelerators and beams* vol.13 pp. 072801 (2010).
- ARTOOS K., COLLETTE C., GUINCHARD M., JANSSENS S., KUZMIN A. and HAUVILLER C., Compatibility and integration of a CLIC quadrupole nano-stabilization and positioning system in a large accelerator environment, *IEEE International Particle Accelerator Conference IPAC10*, 23-25 May 2010 (Kyoto, Japan).
- ARTOOS K., COLLETTE C., GUINCHARD M., JANSSENS S., LACKNER F. and HAUVILLER C., Stabilisation and fine positioning to the nanometer level of the CLIC Main beam quadrupoles, *IEEE International Particle Accelerator Conference IPAC10*, 23-25 May 2010 (Kyoto, Japan).
- COLLETTE C., ARTOOS K., JANSSENS S. and HAUVILLER C., Hard mounts for quadrupole nano-positioning in a linear collider, *12th International Conference on New Actuators ACTUATOR2010*, 14-16 May 2010 (Bremen, Germany).

- COLLETTE C., JANSSENS S., ARTOOS K. and HAUVILLER C., Active vibration isolation of high precision machine (keynote lecture), *6th International Conference on Mechanical Engineering Design of Synchrotron Radiation Equipment and Instrumentation (MEDSI 2010)*, 14 July 2010 (Oxford, United Kingdom).
- COLLETTE C., JANSSENS S., ARTOOS K., GUINCHARD M. and HAUVILLER C., CLIC quadrupole stabilization and nano-positioning, *International Conference on Noise and Vibration Engineering (ISMA2010)*, 20-22 September 2010 (Leuven, Belgique).
- JANSSENS S., COLLETTE C., ARTOOS K., GUINCHARD M. and HAUVILLER C., A sensitivity analysis for the stabilization of the CLIC main beam quadrupoles, *Conference on Uncertainty in Structural Dynamics*, 20-22 September 2010 (Leuven, Belgique).
- FERNANDEZ-CARMONA P., COLLETTE C., JANSSENS S., ARTOOS K., GUINCHARD M., KUZMIN A., SLAATHAUG A., HAUVILLER C., Study of the electronics architecture for the mechanical stabilization of the quadrupoles of the CLIC linear accelerator, *Topical Workshop on Electronics for Particle Physics TWEPP 2010*, 20-24 September 2010 (Aachen, Germany).





# Spares






26

# Previous performances on stabilization of accelerator components

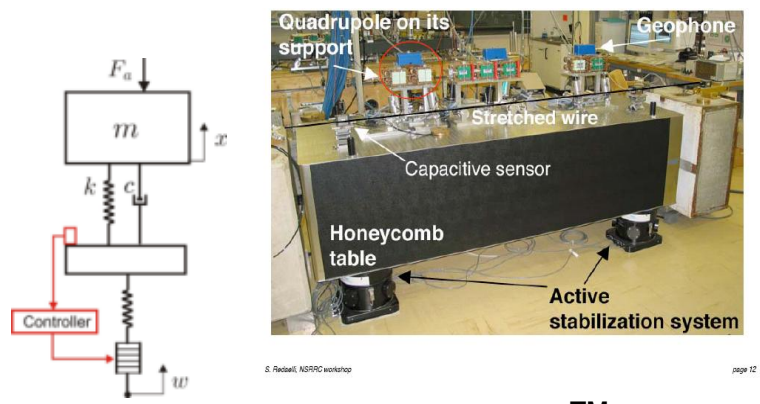

TMC STACIS™

TMC table:  
Stiffness: 7 N/μm (value catalogue)

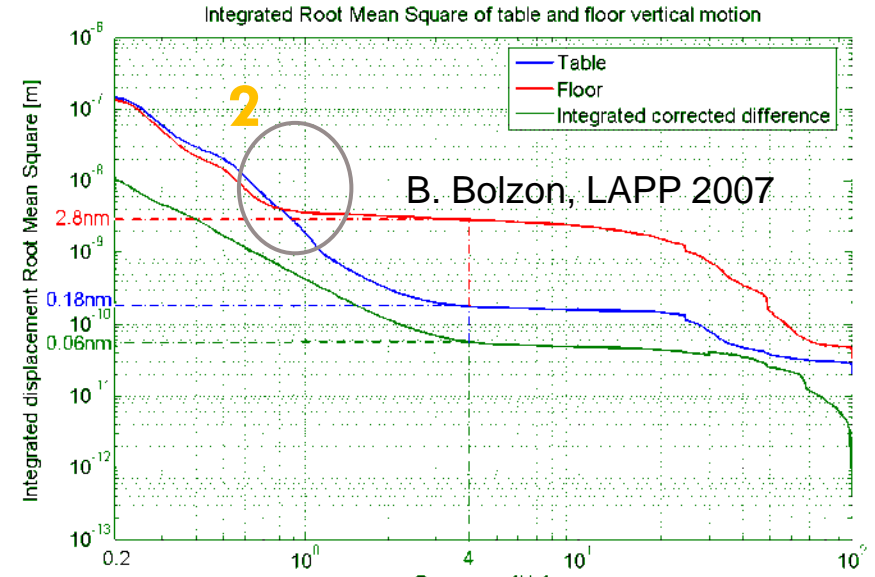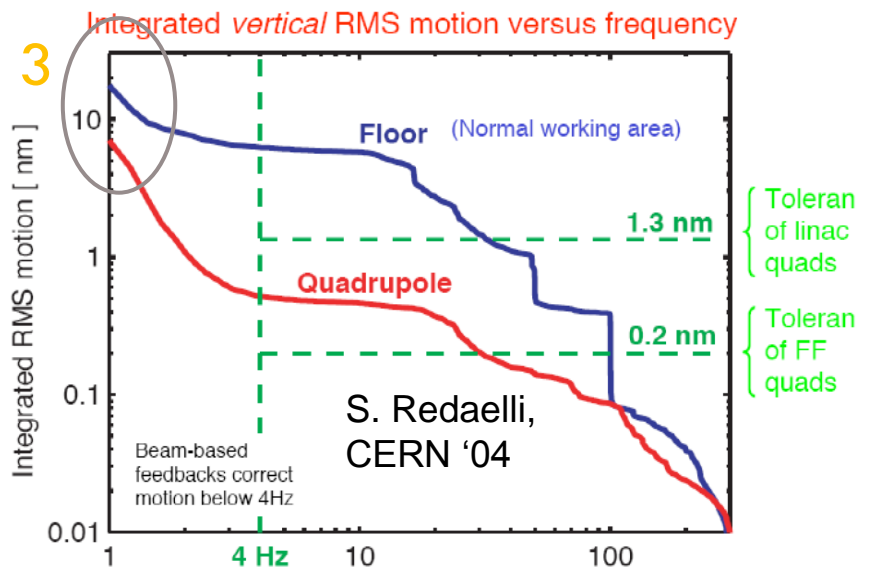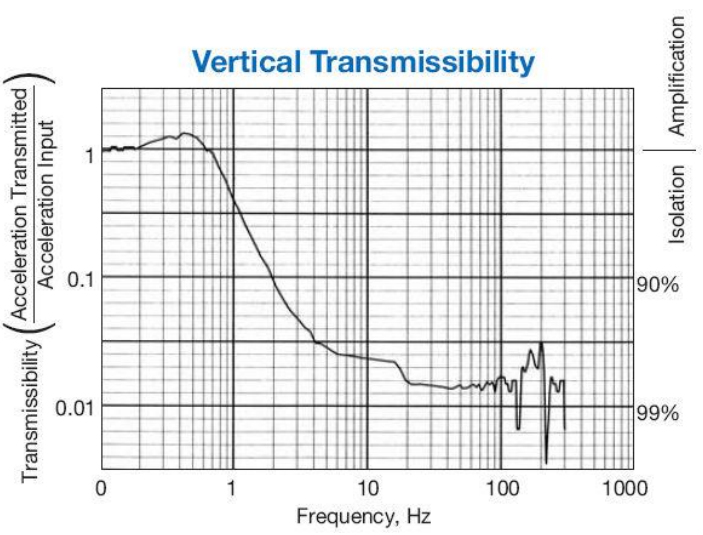

# Previous performances on stabilization of accelerator components

