


Very Forward Calorimeters

W. Lohmann, DESY


- Challenges of Very Forward Detectors
- LumiCal
- BeamCal & Pair Monitor
- Data Transfer & Integration
- Priority R&D Topics

Calorimeters in the very forward region (14 mrad xa)

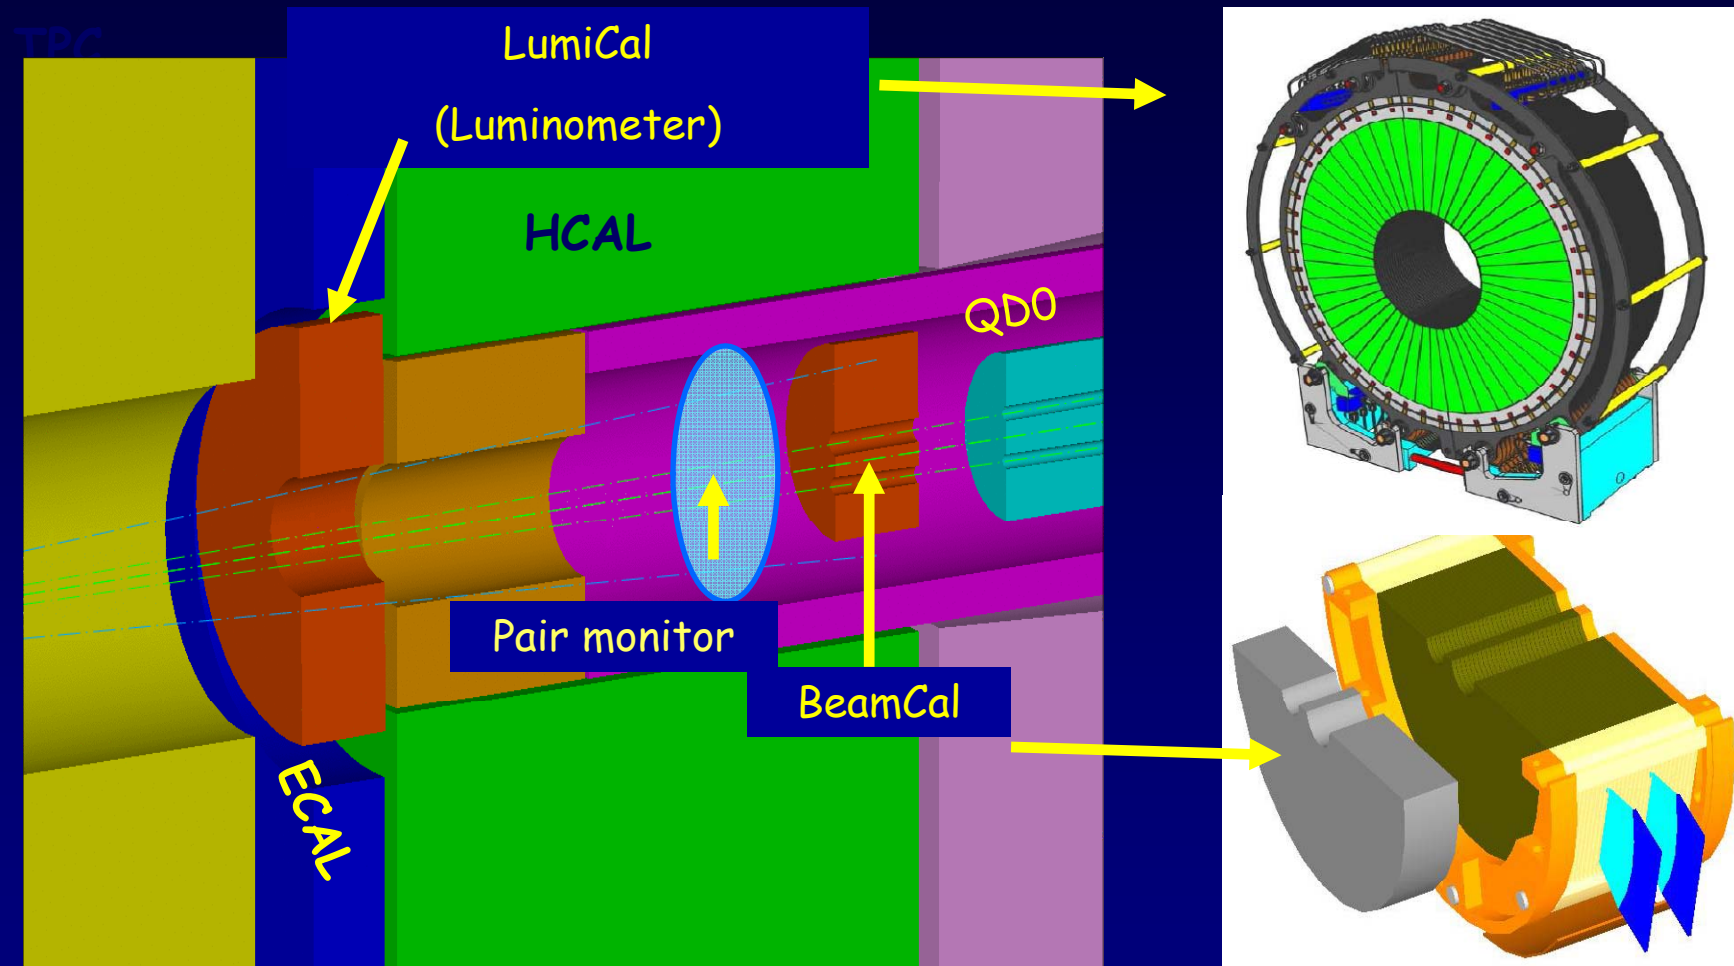

one more calorimeter, GamCal


~ 180 m from IP
 < 1 mrad aperture (beamstr photons)

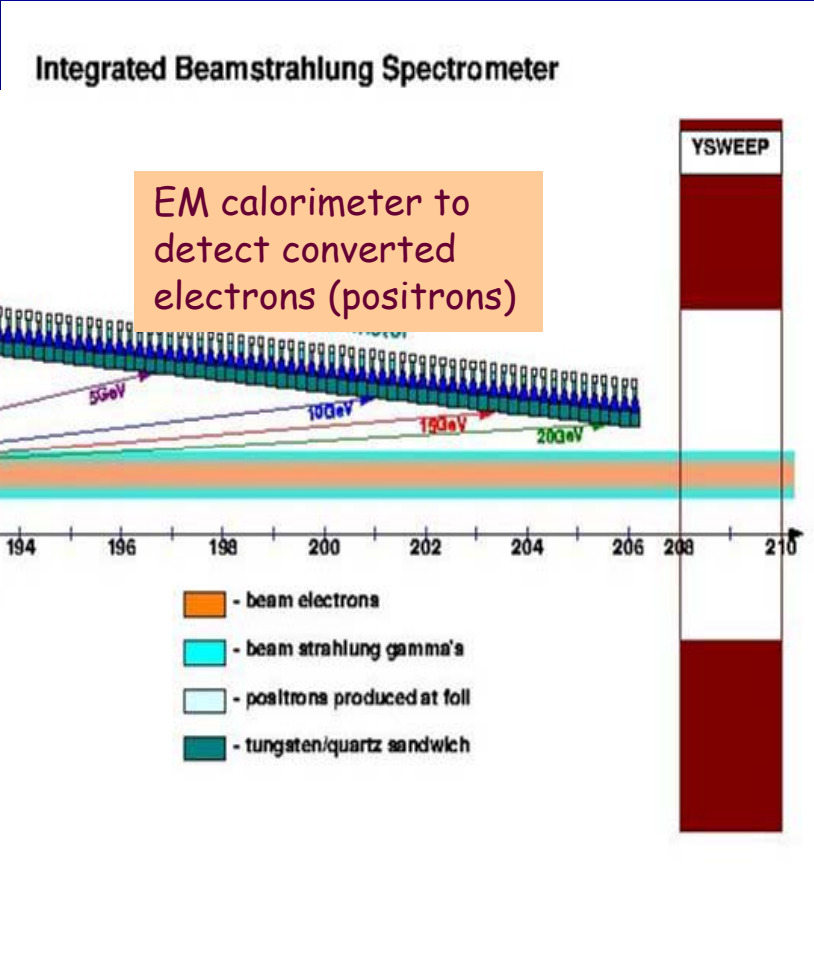


Thin foil to convert beamstrahlung photons

Measuring only the total photon energy improves the measurement of beam parameters significantly! (reduced correlations)
 Also sensitive at low luminosities

Precise Luminosity measurement
Gauge process: $e^+ e^- \rightarrow e^+ e^- (\gamma)$

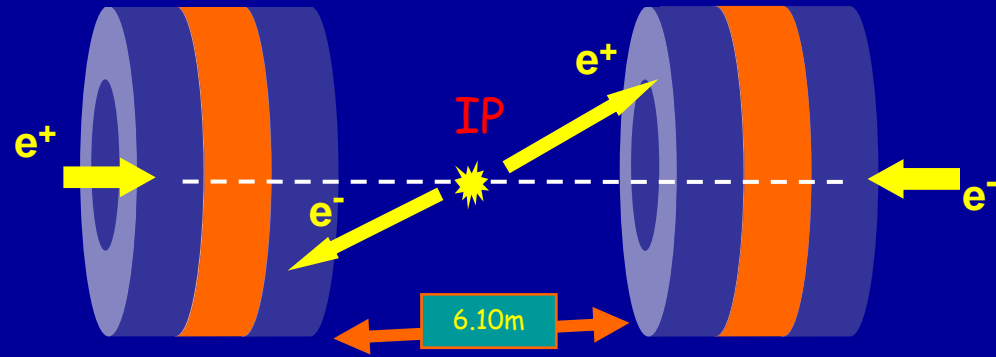

Fiducial volume for event counting

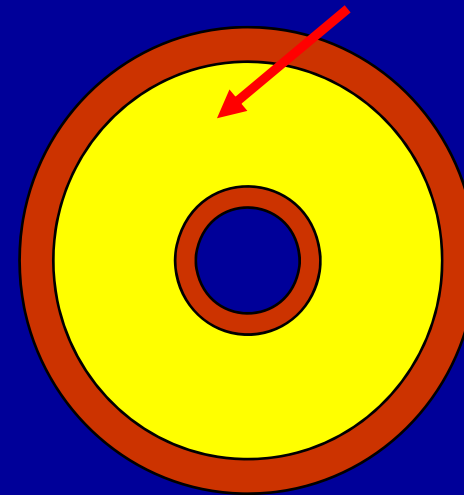

$$\mathcal{L} = N / \sigma$$

Goal: Precision $< 10^{-3}$


Count
Bhabha
events

From
theory

Challenges:

- compact calorimeter (small Moliere radius)
- small bias in θ ($< \mu\text{rad}$)
- small bias in energy scale (0.1%)
- fast readout


Events

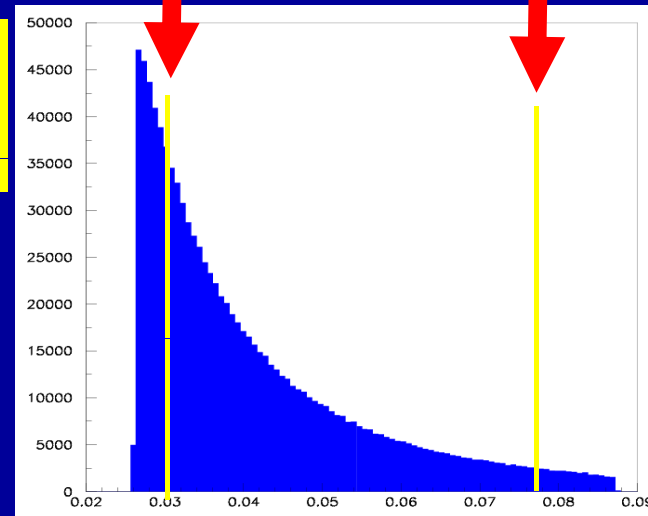


$\Theta, (\text{rad})$

LumiCal Sensors

Half sensor plane (design)

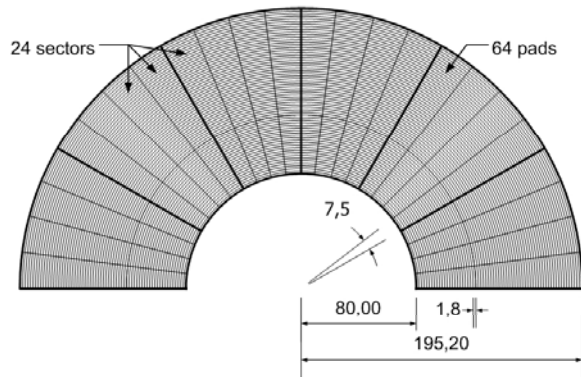

Prototype sector (design)

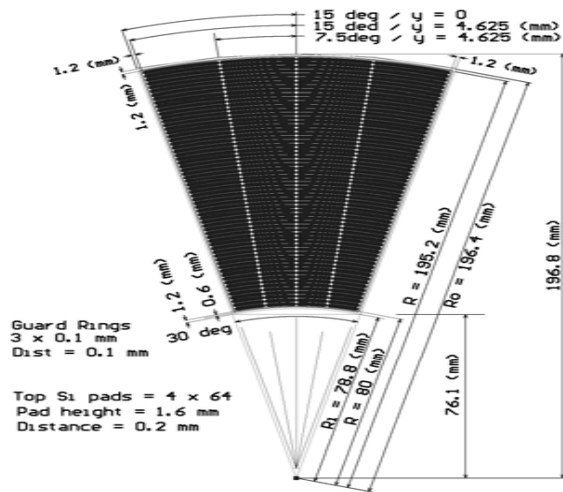


N-type silicon, p⁺ strips, n⁺ backplane,
 Crystal Orientation <100>
 320 μm thickness ± 15 μm
 Strip pitch: 1800 μm
 Strip p⁺ width: 1600 μm
 Strip Al width: 1700 μm

Masks for prototypes ready (Hamamatsu)


Prototype sensors will be delivered in March

In parallel: development of the fanout

Fan-out (prototype)

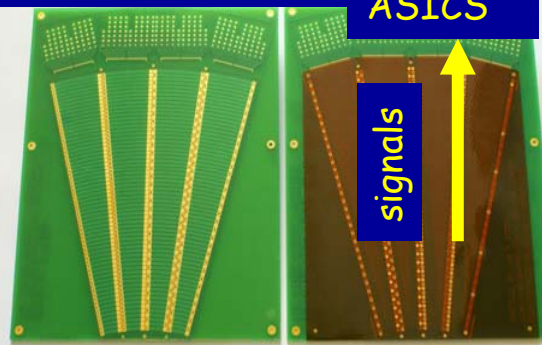


Contact details

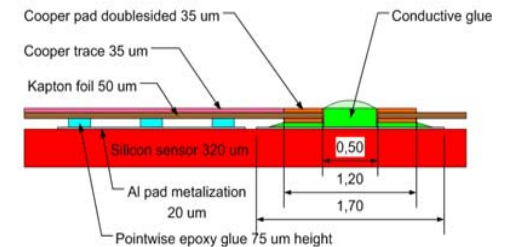


- One FE ASIC will contain 32 - 64 channels, 10 bit
- One ADC will serve several channels (MC simulations not finished)
- AMS 0.35 μm technology
- prototypes of the FE ASIC and ADC ASIC available,

Tests of the FE ASICS so far promising.


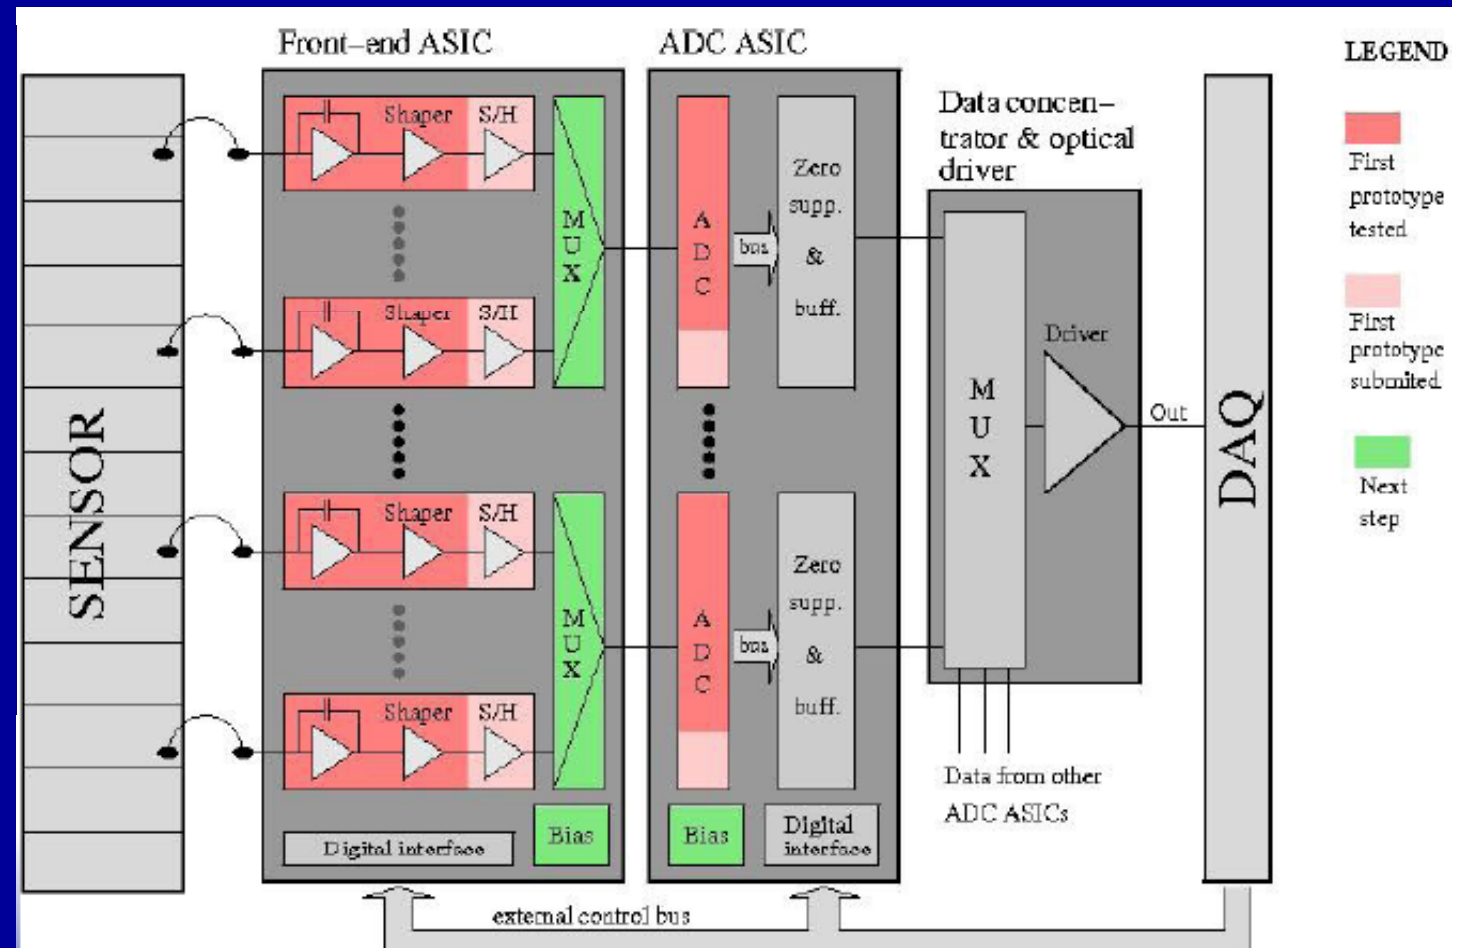


FE Asic:
8 channels per chip, 4 with
MOS feedback resistance,
4 with passive Rf feedback

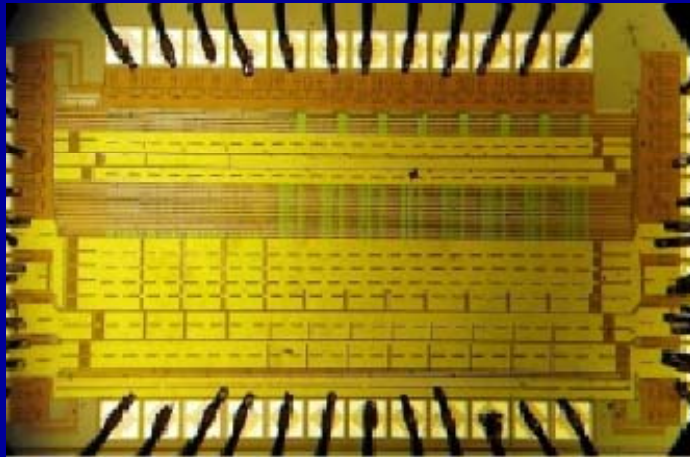


- ADC Asic:
- Pipeline architecture
 - 10 bit resolution
 - Maximum sampling rate 35 MHz


Submission ADC and DAC Sept.
2008
Prototypes obtained in November

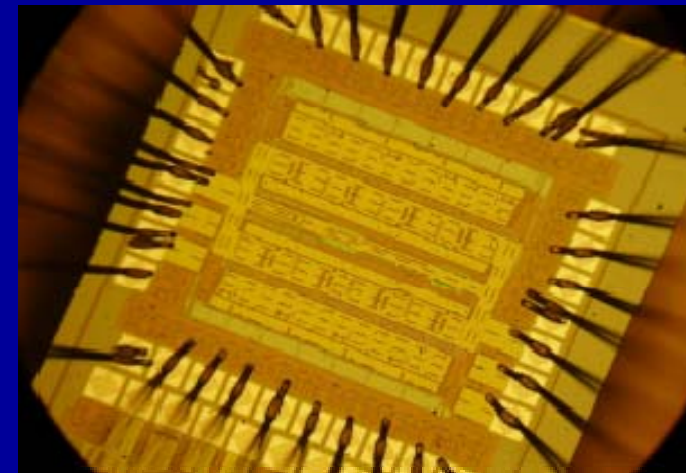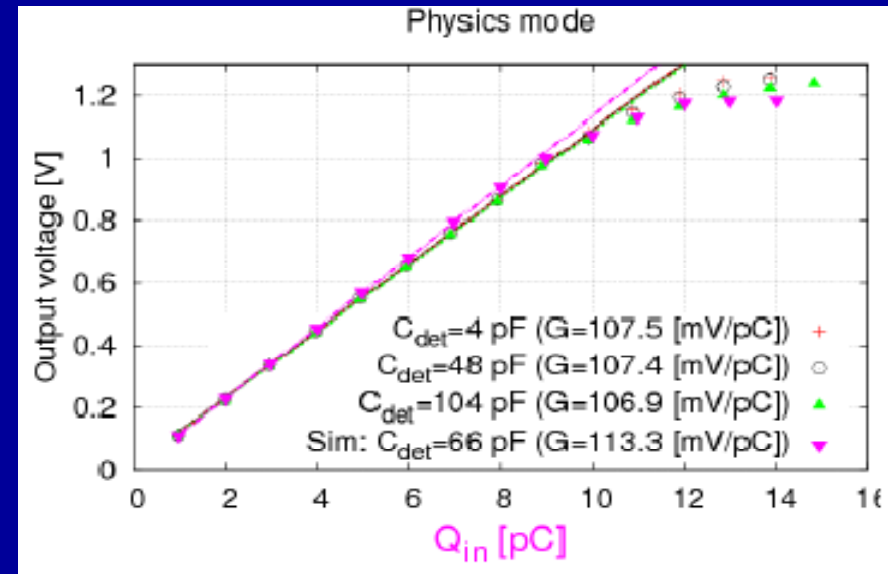


First successful tests of the analog part with a single pad sensor

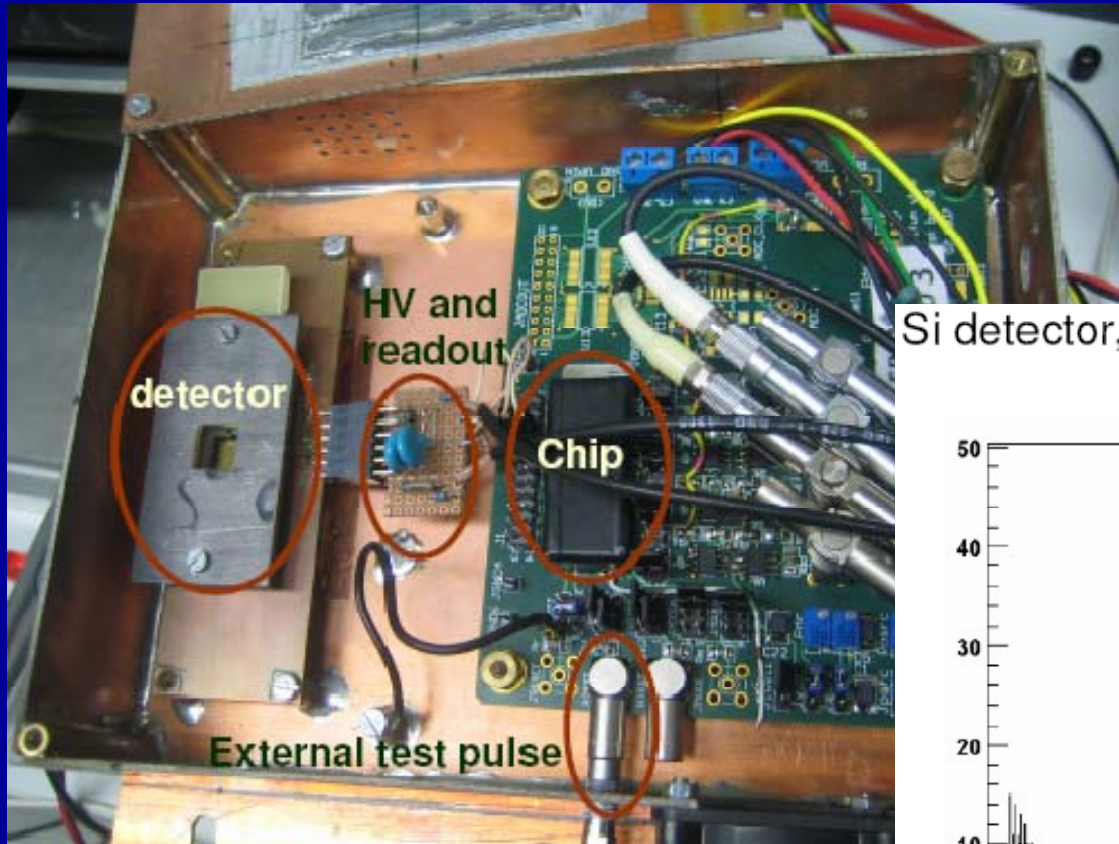

Si detector, MOS preamp.

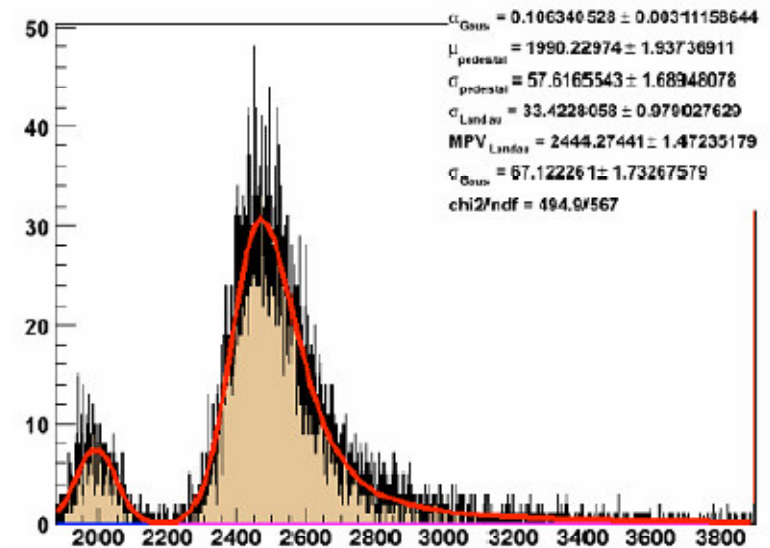


E_photon (BCAL) and E_photon

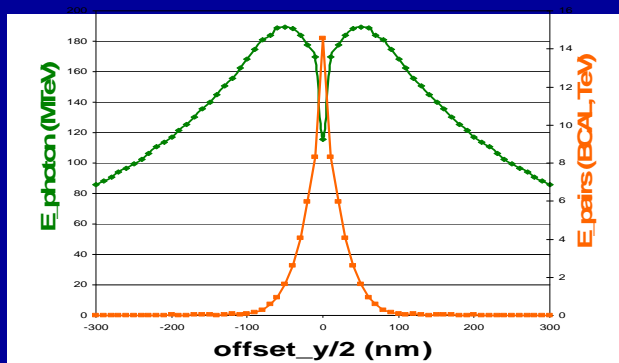

BeamCal, Pair Monitor, GamCal
Fast feedback for beam tuning, beam diagnostics using beamstrahlung;

Beamparameter determination on percent level

Fast analog summation of pad-groups

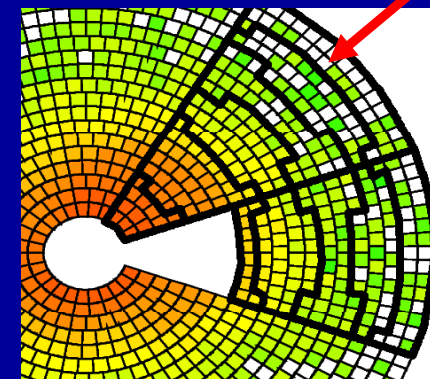


BeamCal

Hermeticity,
Electron veto at low angles,


Mask for the inner detectors

Challenges:




- compact calorimeter (small Moliere radius)
- radiation hard sensors (~ MGy)
- fast readout

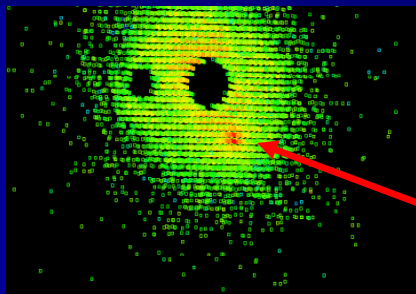


Local deposition from a single high energy electron

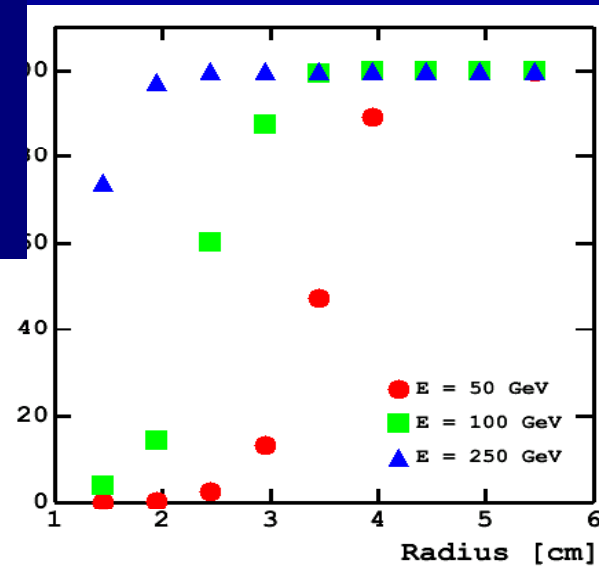

<http://www-zeuthen.desy.de/ILC/fcal/>

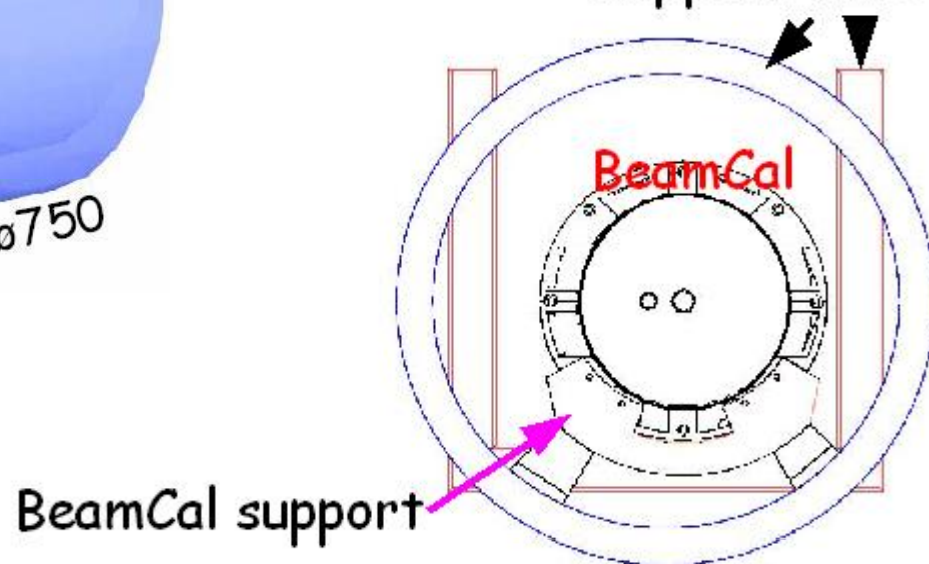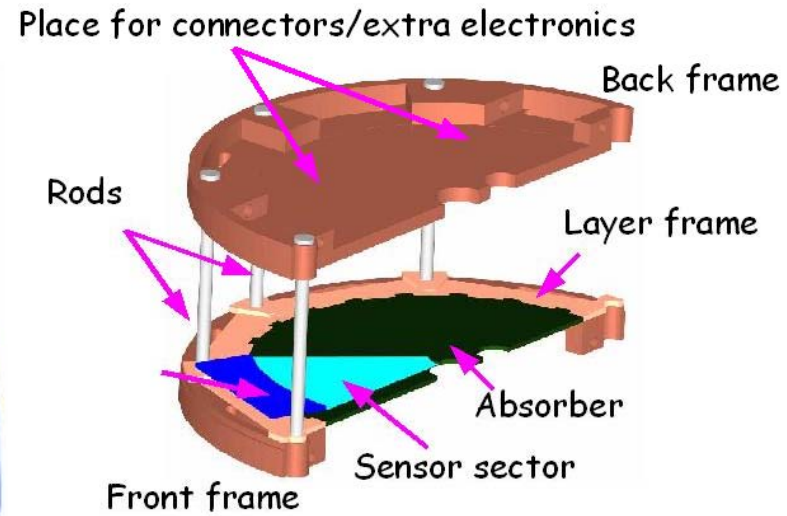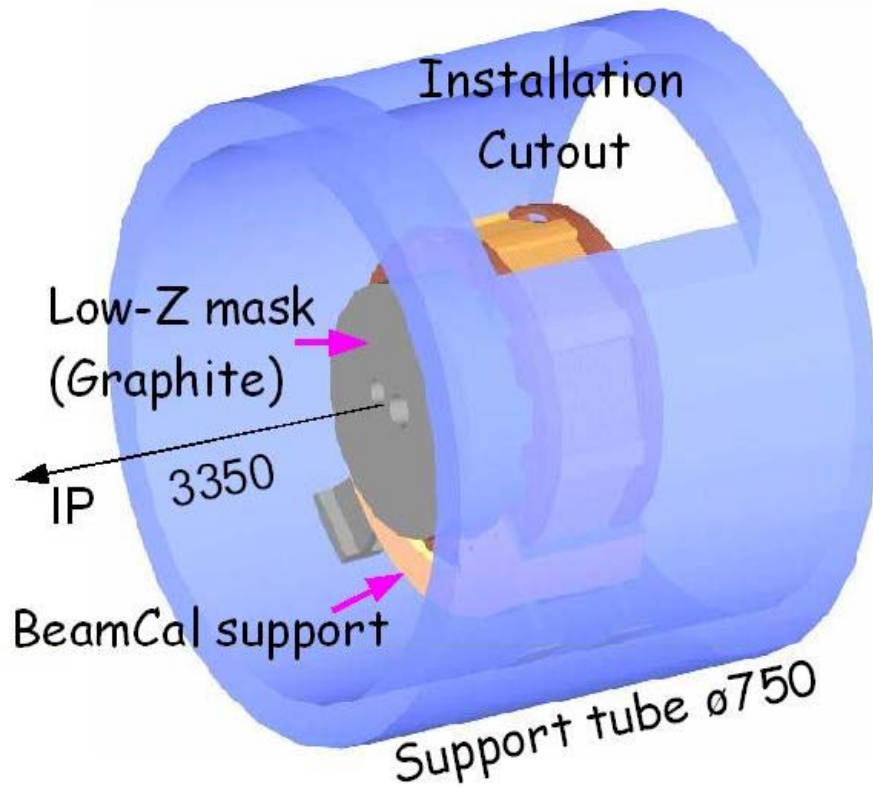

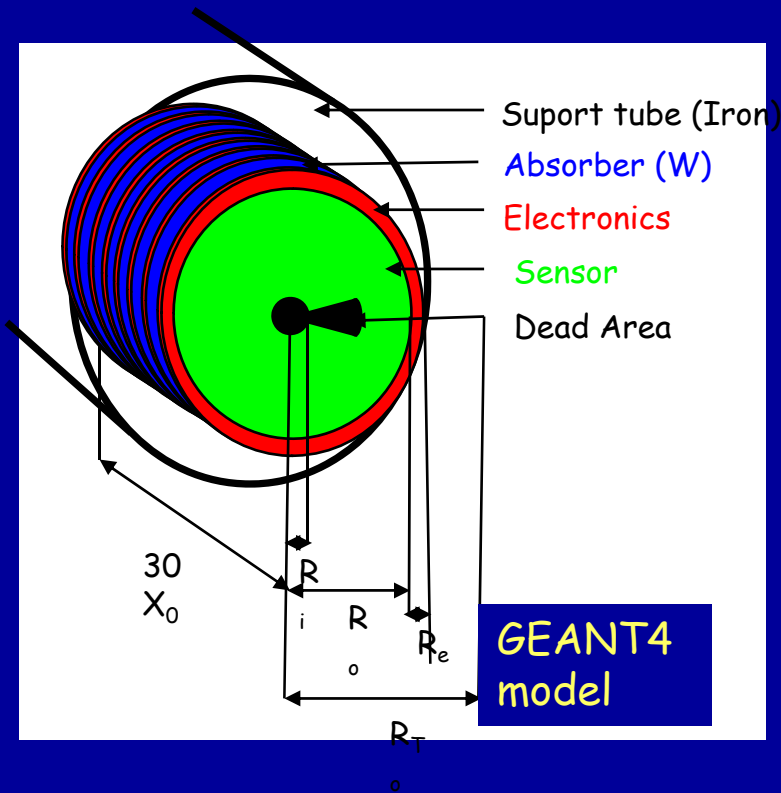



Neutron flux through FE electronics:

10^{10} neutrons/mm²/year

Electromagnetic dose for FE electronics:

< 100 Gy /year

Neutron flux inside sensors:

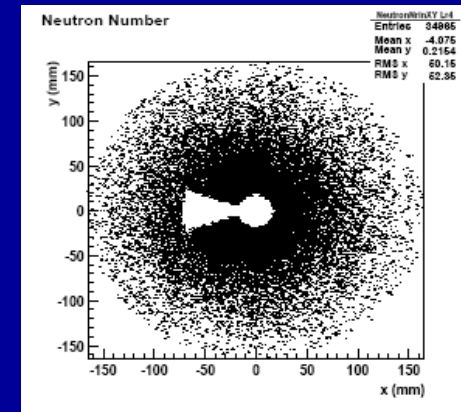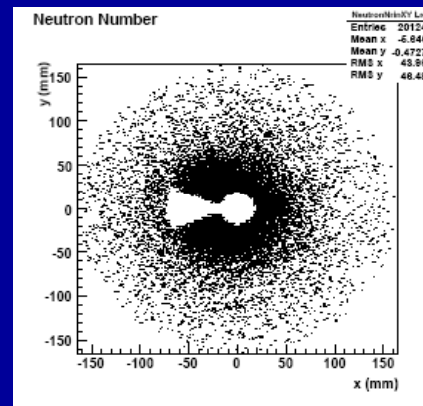

Two different 'physics lists'

10^{12} neutrons/mm²/year
(needs more detailed studies)

pCVD diamonds:

- radiation hardness under investigation (e.g. LHC beam monitors, pixel detectors)
- advantageous properties like: high mobility, low $\epsilon_R = 5.7$, thermal conductivity

GaAs:


- semi-insulating GaAs, doped with Sn and compensated by Cr
- produced by the Siberian Institute of Technology

SC CVD diamonds:



- available in sizes of mm²

Sapphire

CVD: Chemical Vapor Deposition

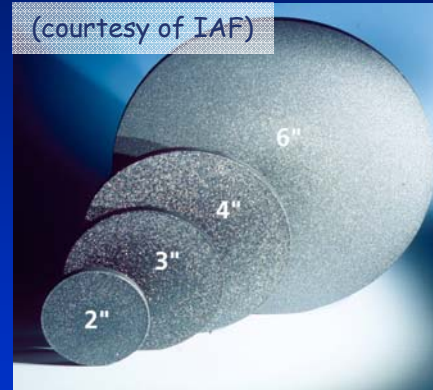


polycrystalline
CVD diamond

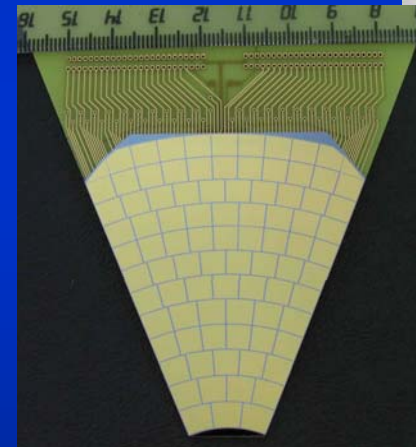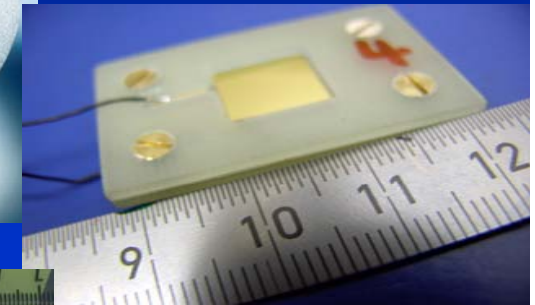

GaAs

Single crystal
CVD diamond

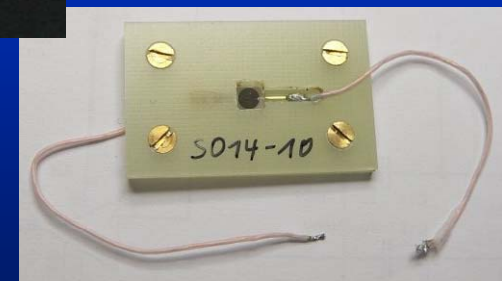


Test Beam Equipment and sensor tests

Setup used for radiation hardness tests at the SDALINAC accelerator

TU Darmstadt

exit window of beam line

collimator (I_{Coll})

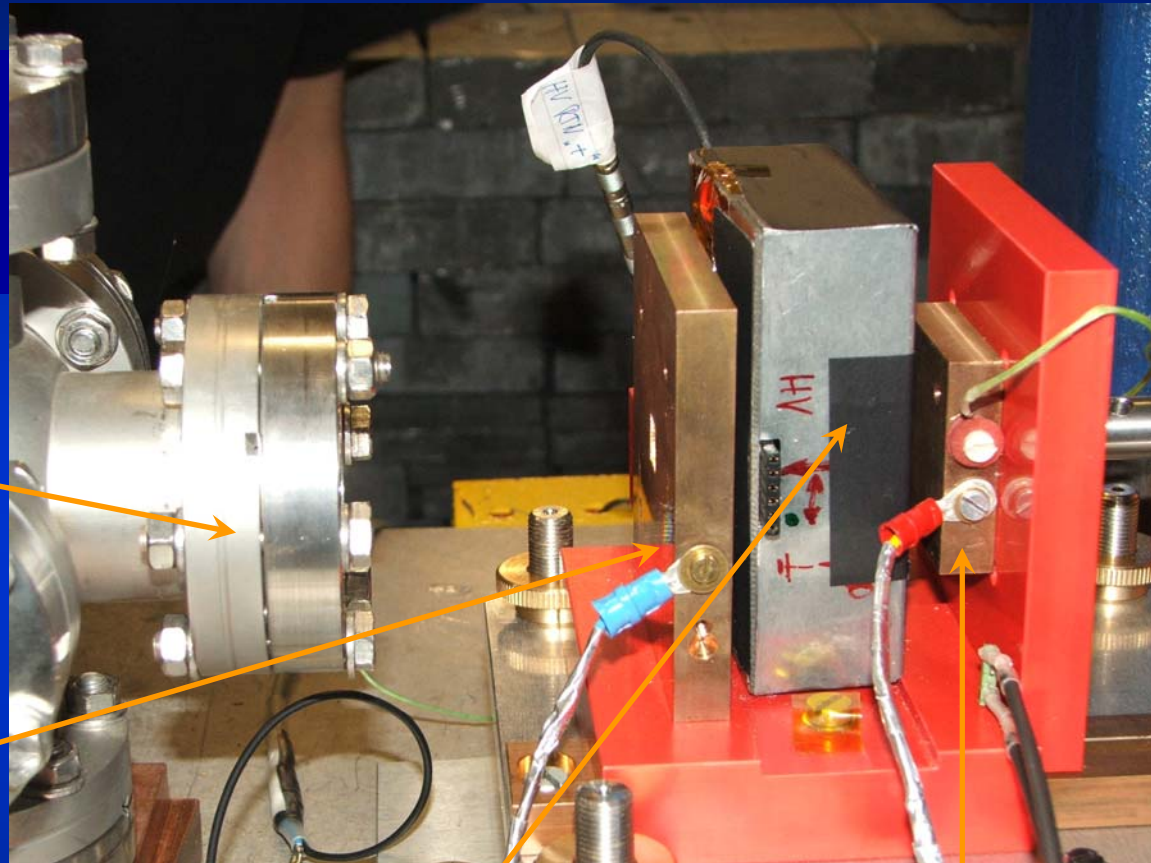



sensor box (I_{Dia} , T_{Dia} , HV)

Faraday cup (I_{FC} , T_{FC})


Completed and more comfortable: more efficient use of the beam

Sensor irradiation tests

E6 samples CCD vs dose at 400V

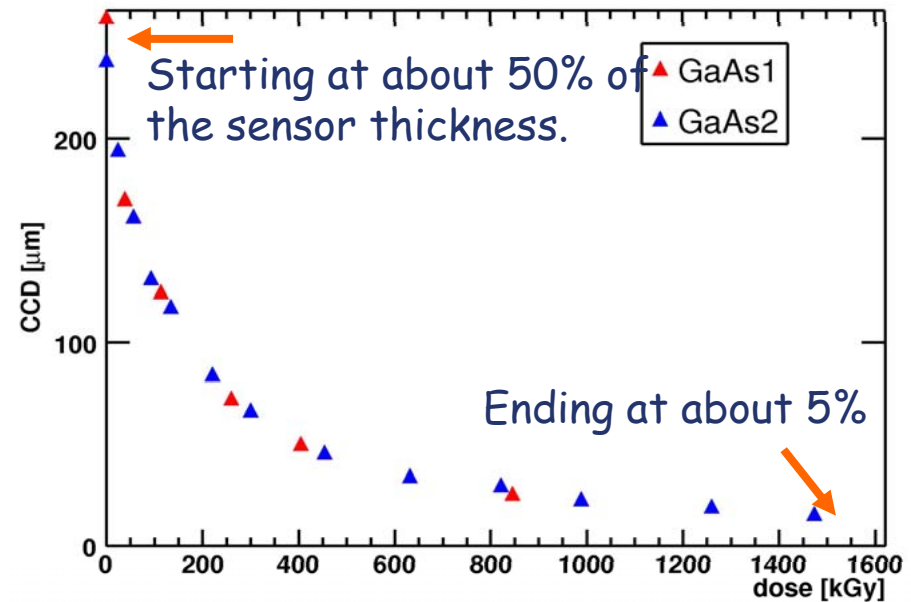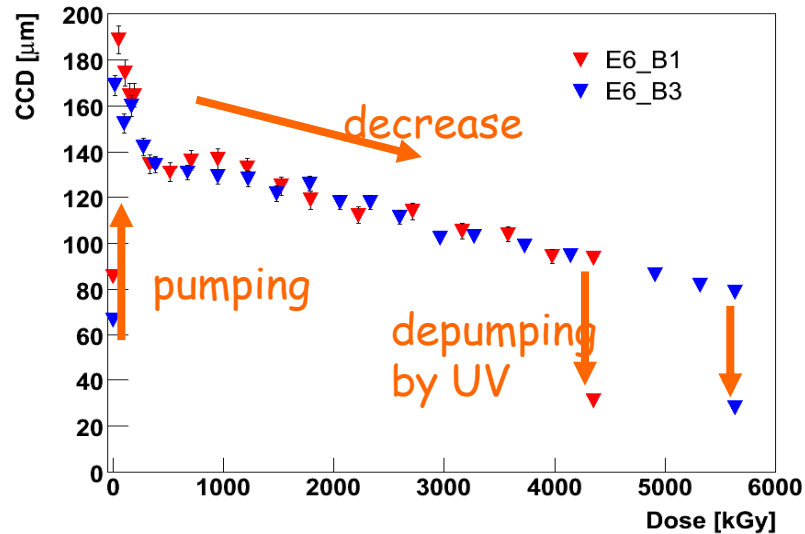


E6_B1

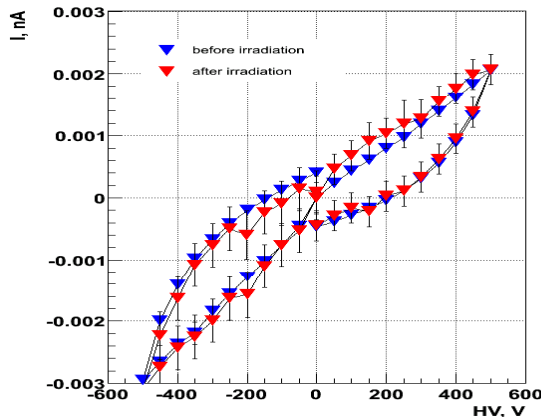


CVD diamond sensors:
Smooth degradation
No increase of leakage current.


GaAs: acceptable increase of the leakage current

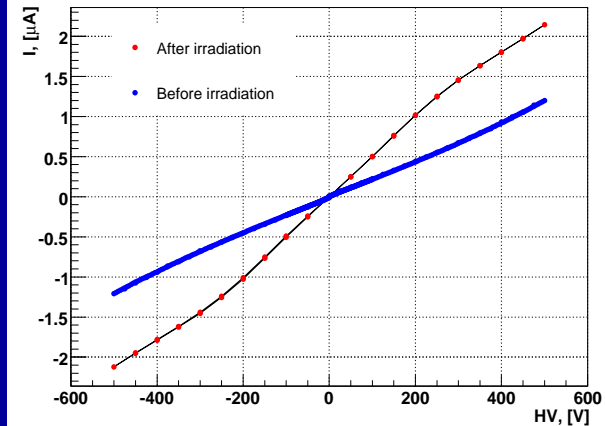

Sensor tests

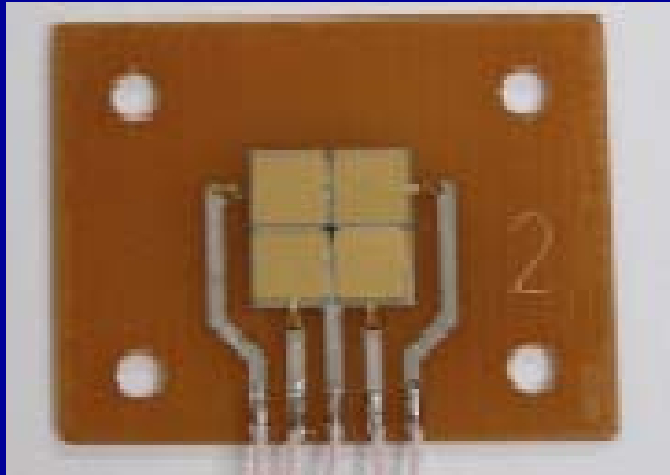

A new batch of GaAs sensors with Cr concentrations between 10^{16} and 10^{18} was recently delivered, testbeam measurements completed

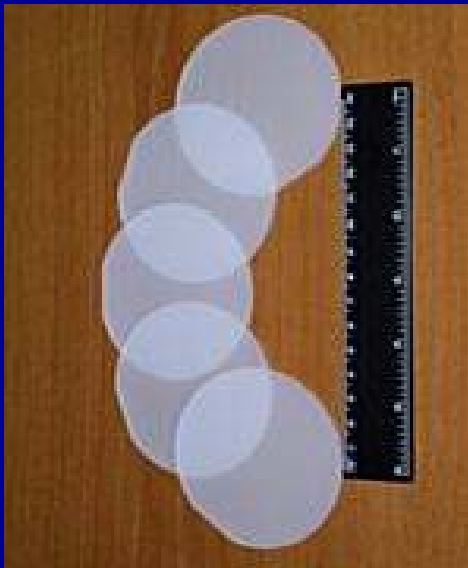


Sensors made of single crystal sapphire

CCE is a few %


At a dose of ~ 12 MGy the signal current dropped to 30 % of its initial value!

12 MGy $\sim 10^{17}$ e^-/cm^2

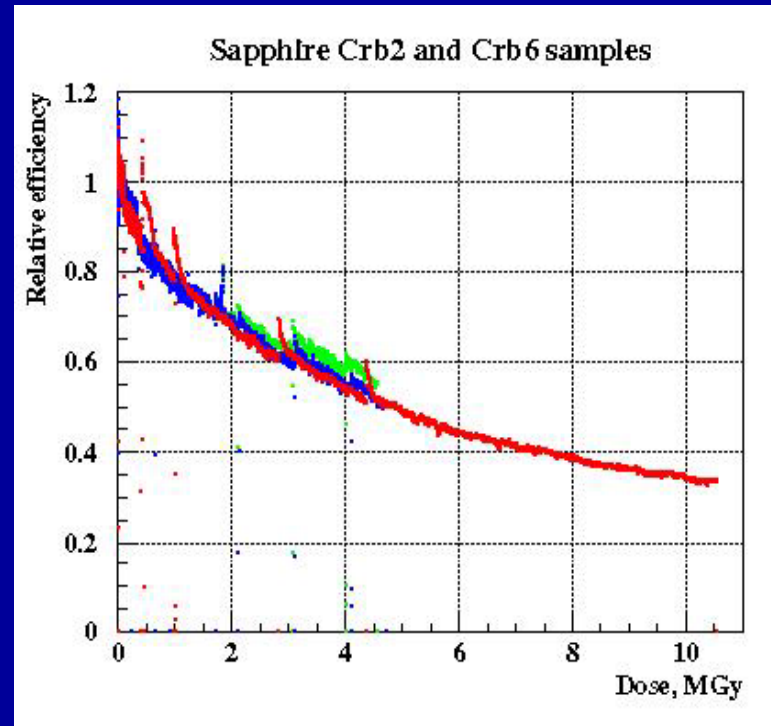

Dedicated FE electronics for BeamCal, based on KPiX


Digital Buffering during bunch train, readout in between trains

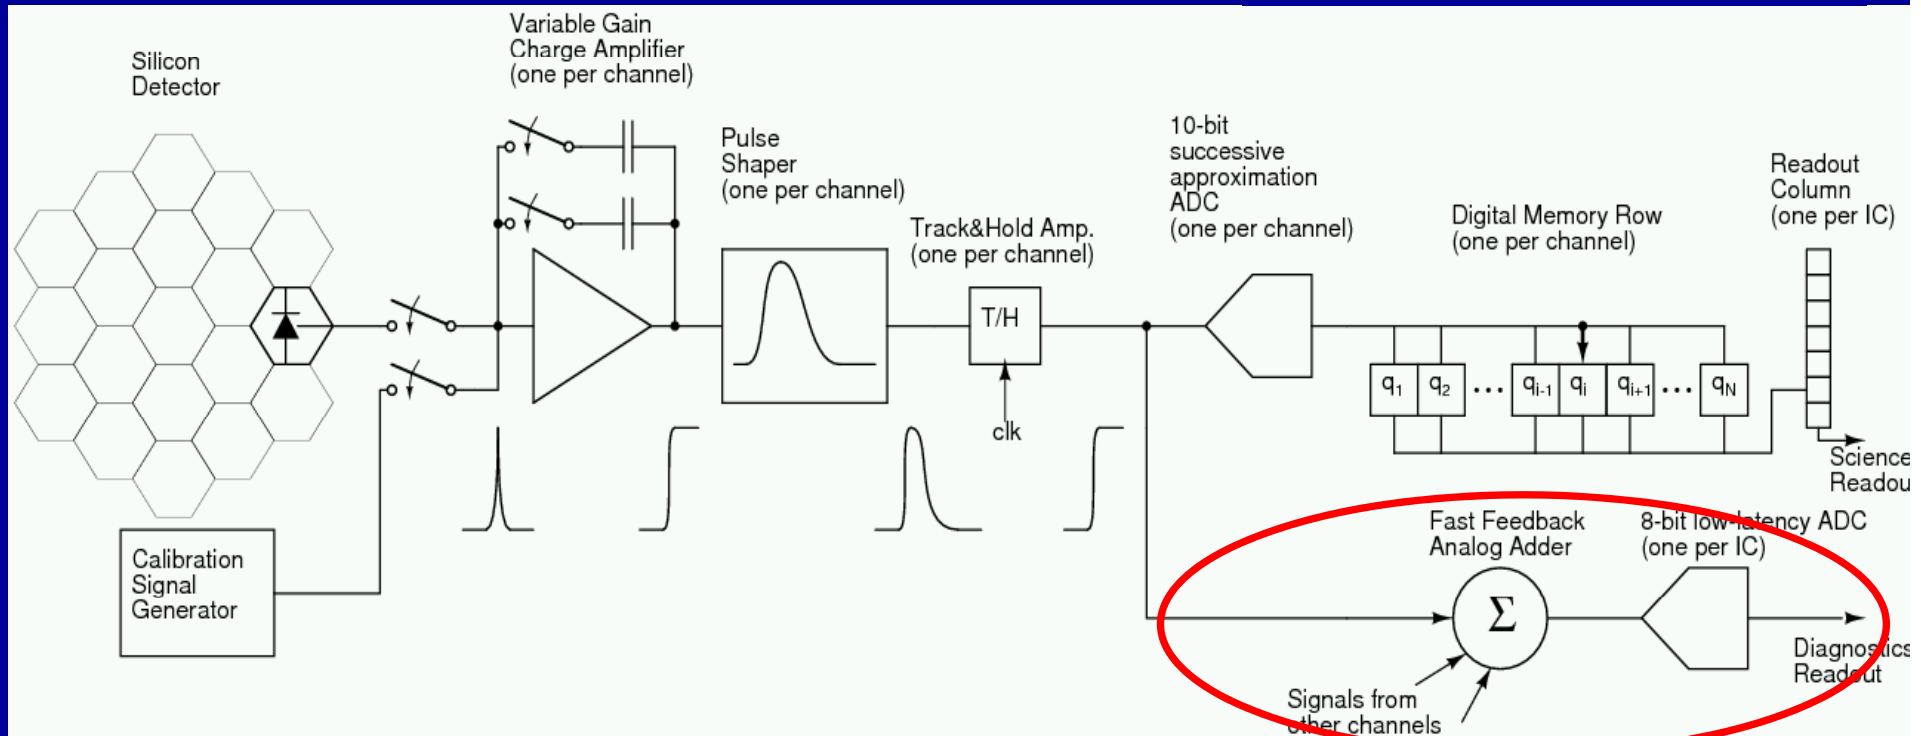


- 32 channels per chip
- all data is read out at 10 bits for physics purposes;
- Low latency output, sum of all channels is read out after each bx at 8 bits for beam diagnosis (fast feedback)
- Prototype in 0.18- μm TSMC CMOS technology

Fast analog adder for groups of pads used for fast feedback



ASIC for the pair monitor
 .25 μm TSMC technology
 # of pixel: 36
 Pixel size: 400 × 400 μm²
 Bump bonding to a sensor

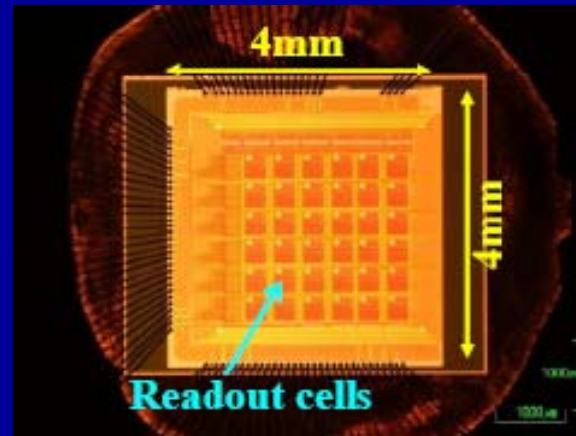

Layout of prototype ASIC

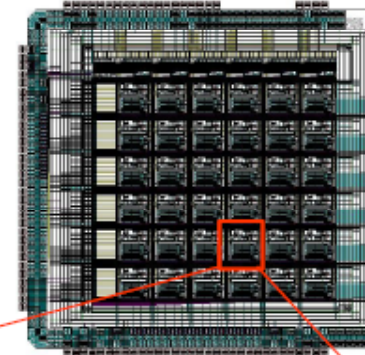


Prototype produced and successfully tested

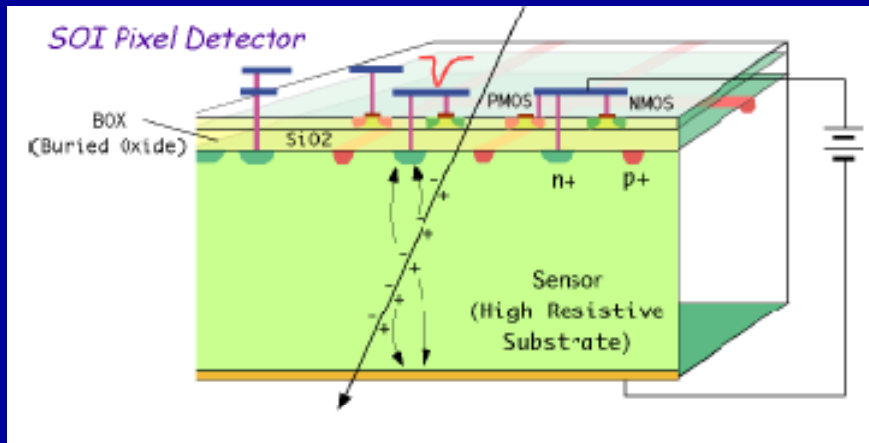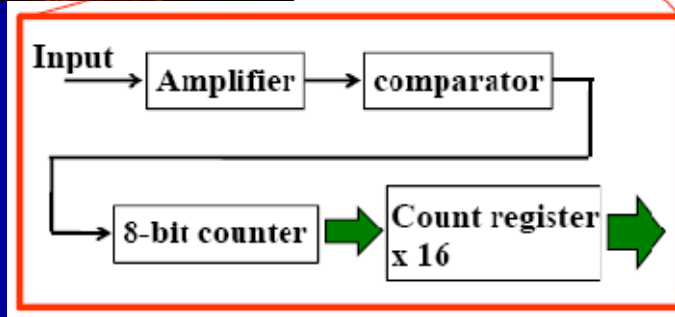

Pair monitor will use SoI technology,
 Sensor and readout ASIC embeddd in the same wafer;



prototype 2009

Data Transfer

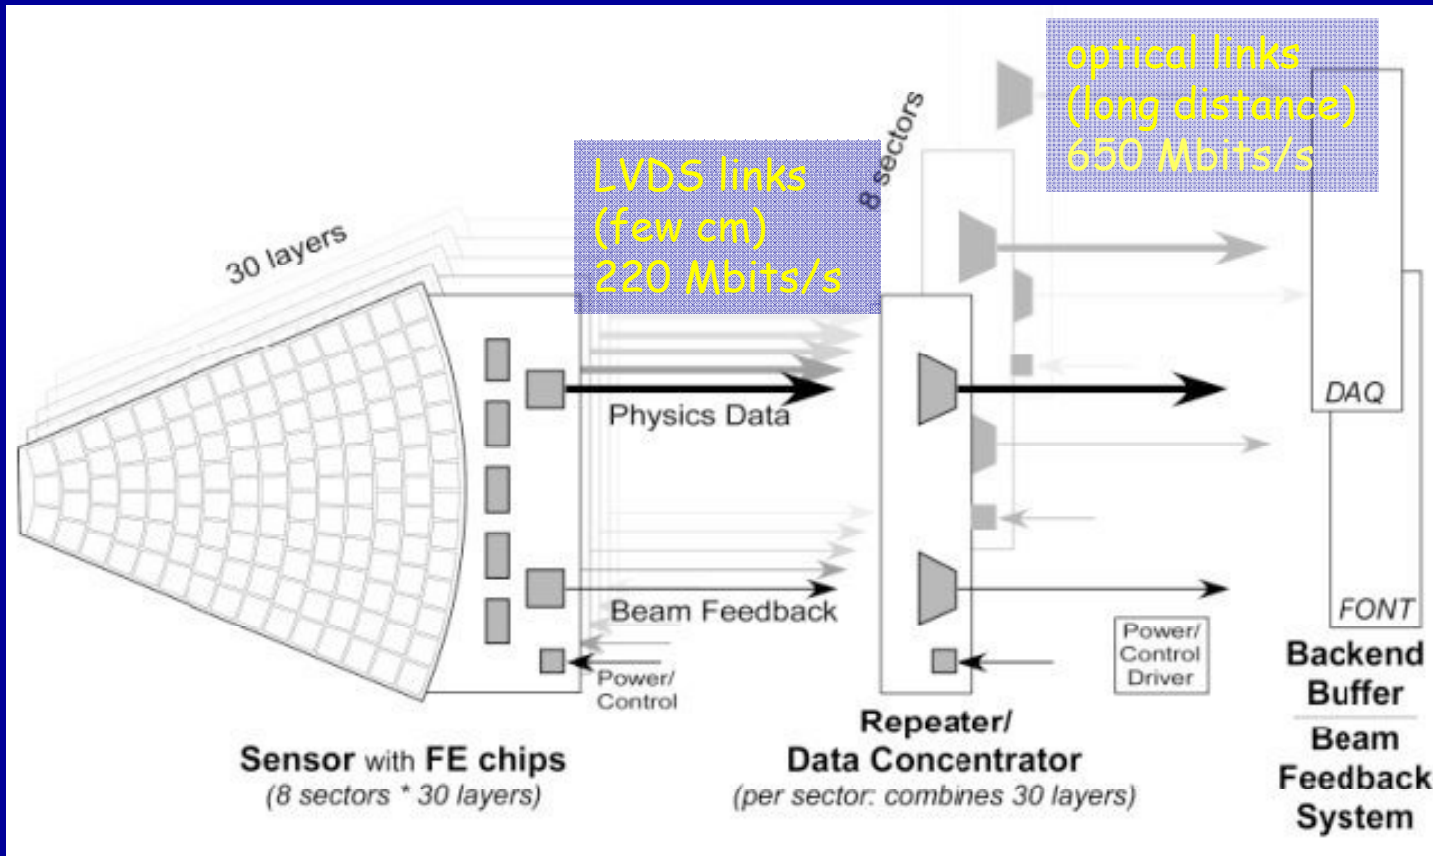


First step: concept based commercial components
 Second step: dedicated prototype for a system test

Laser Position Monitoring

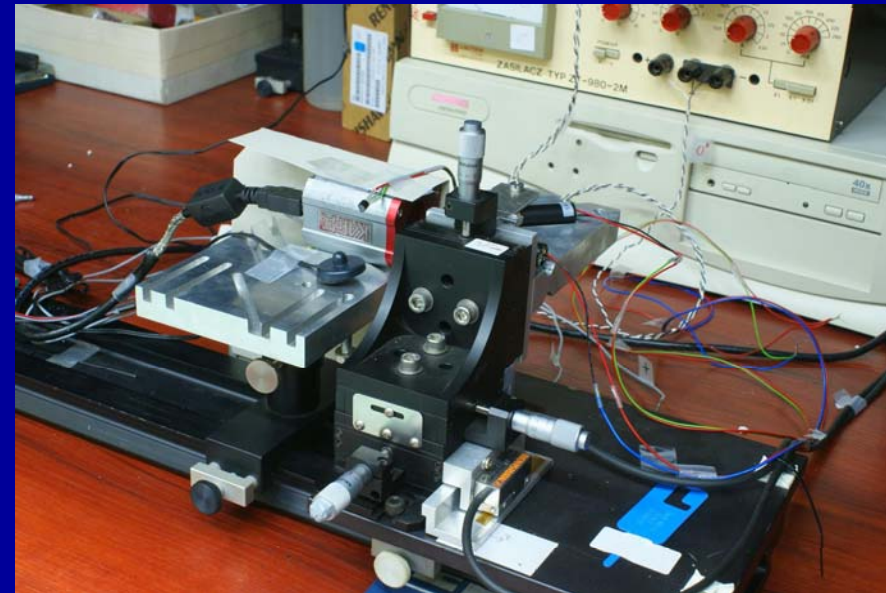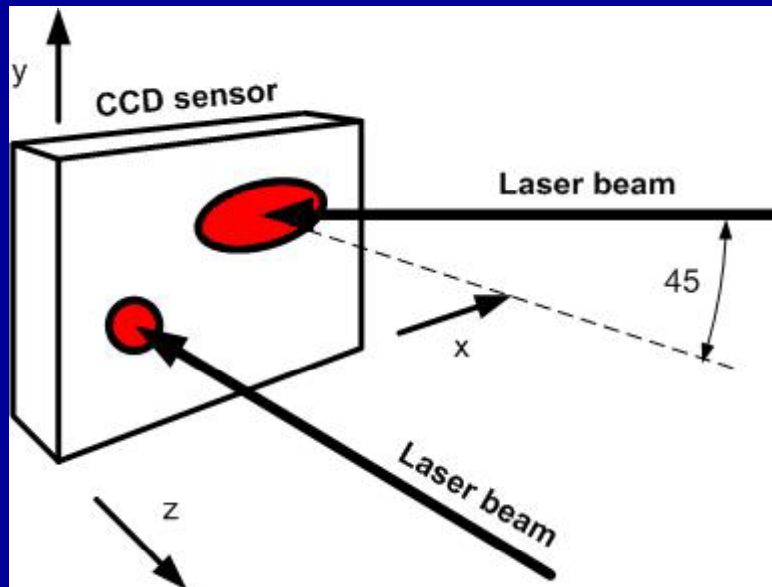

Over short distances accuracies reached:
Displacements in the x-y plane: $\pm 0.5 \mu\text{m}$
Displacements in z direction: $\pm 1.5 \mu\text{m}$



ILD Integration

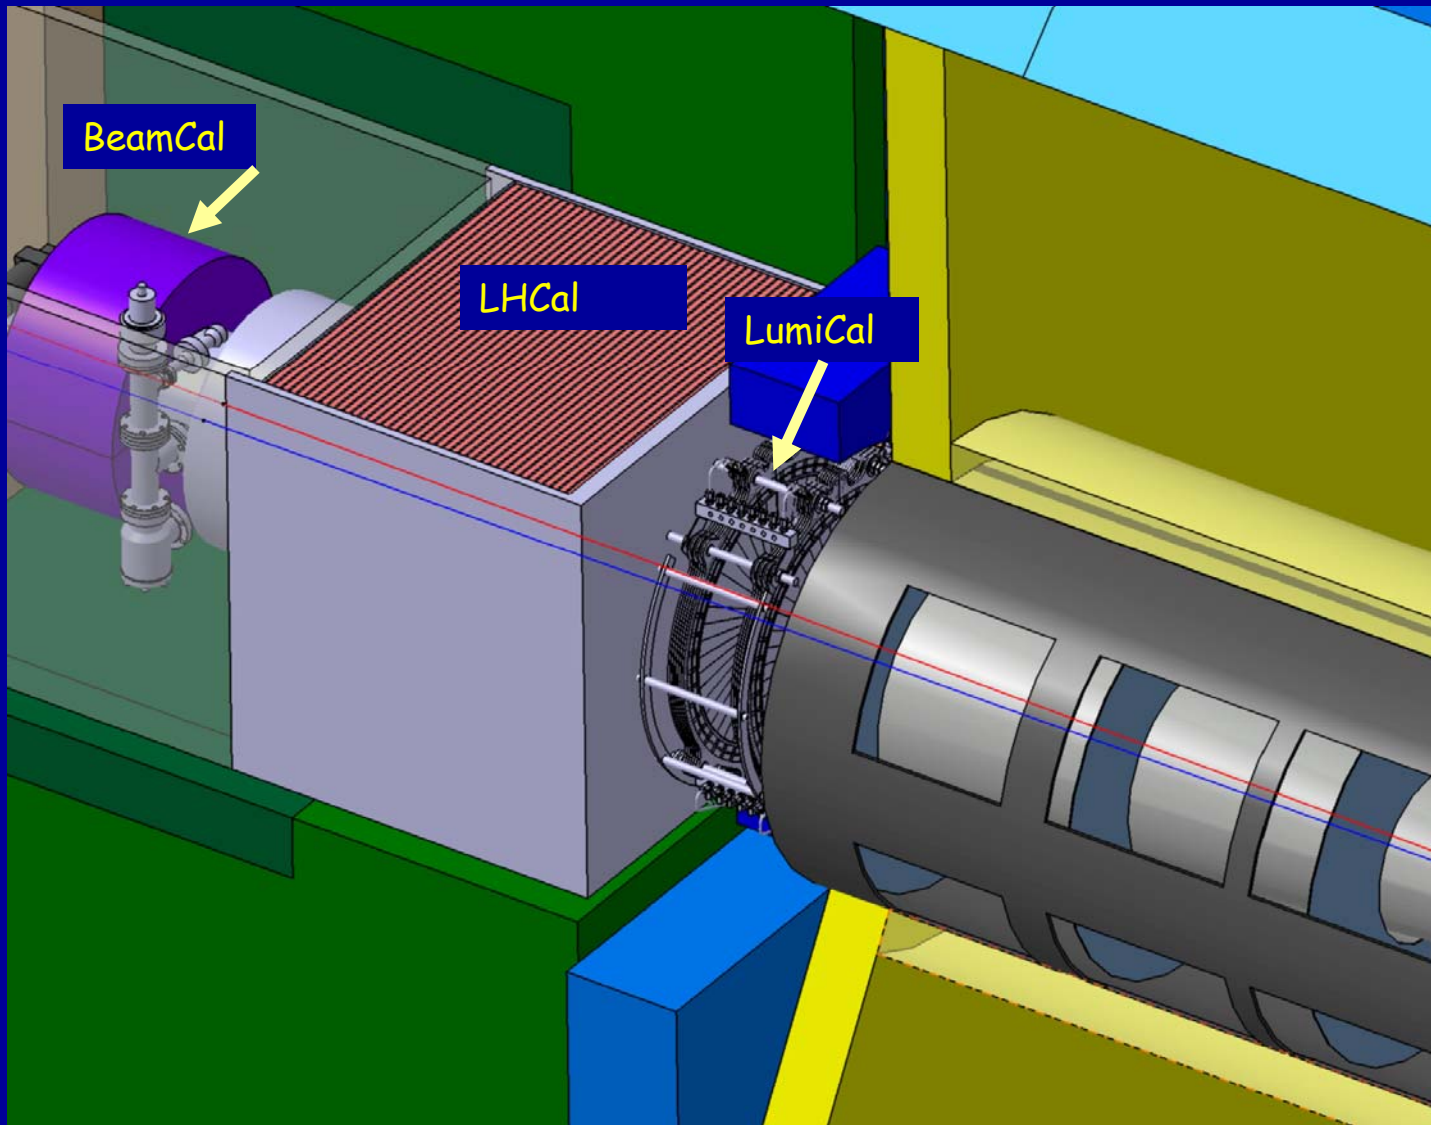


Priority topics within FCAL:

- Large area radiation hard sensors for calorimetry (BeamCal)
- Precise position measurement of electromagnetic showers (Sensors for LumiCal, position monitoring)
- ASICs with high readout speed, large dynamic range, large buffering depth and low power dissipation, allowing fast feedback for luminosity optimisation
- Prototyping and test of more complex subsystems to prepare compact sampling calorimeters

Testbeam equipment for sensor performance studies using the EUDET telescope

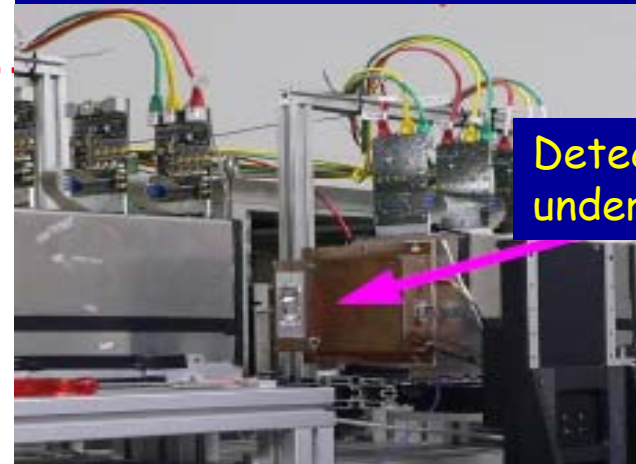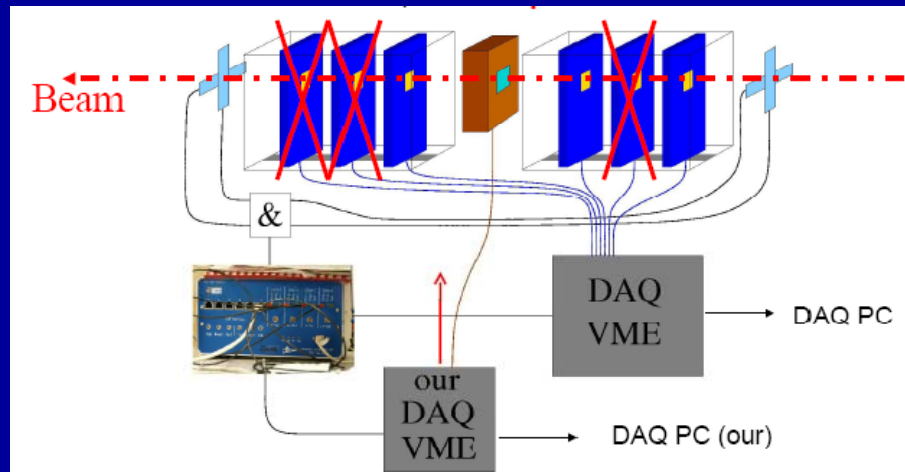


Detector under test

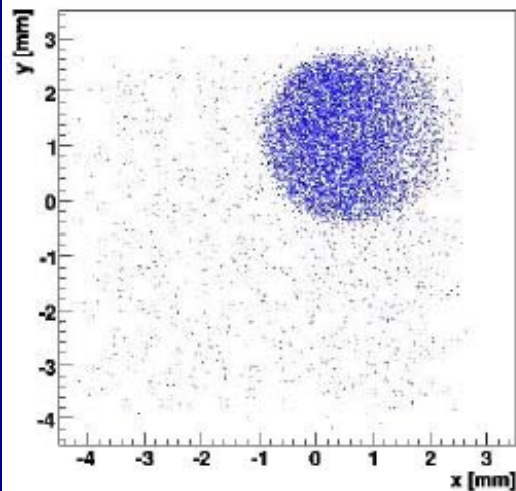

Reconstructed hits with detector signal

Goal: precise measurement of the response of sCVD diamonds; Reference sensor


Data analysis in progress

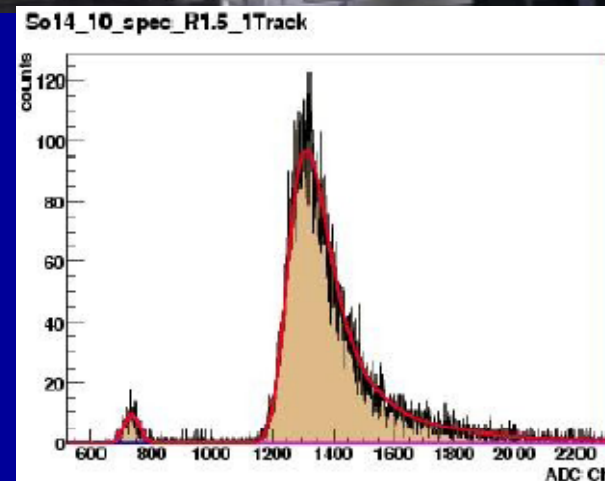

Sensor response with the track pointing to active detector area


Beampipe Design

Conical, central part Be

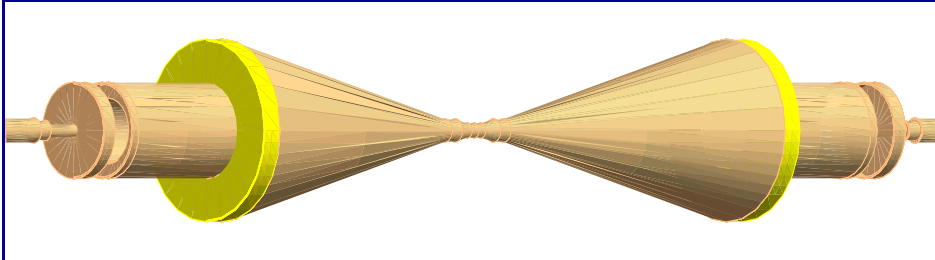


Pro: minimum material in front of LumiCal
 Contra: vacuum, HOM, mechanics

Cylindrical, full Be, inner radius 5.5 cm
 (14 mrad crossing angle)

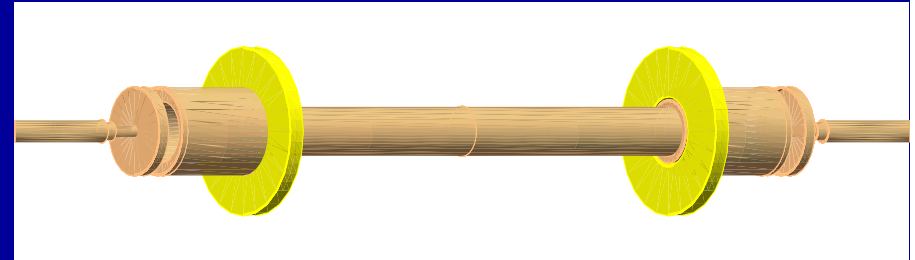


Pro: facilitates mechanics, vacuum
 Contra: material in front of LumiCal, pre-showering, electron measurement?

Preshower particles

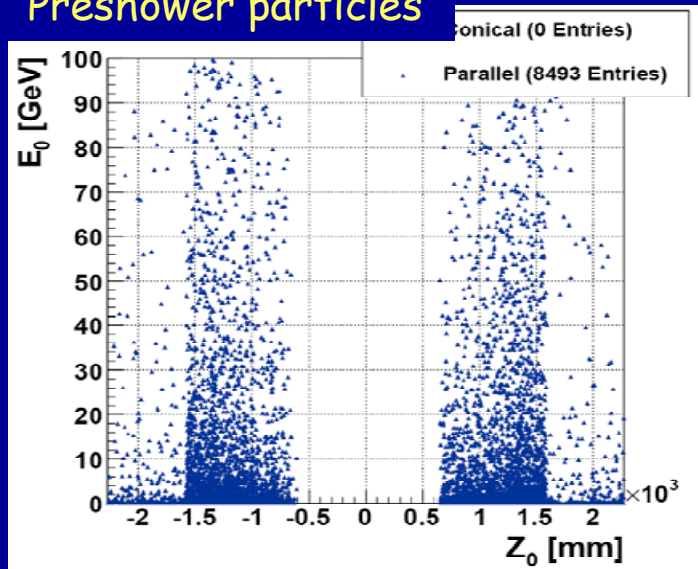

Difference in the Bhabha count rate:
 $(1 \pm 2) \times 10^{-4}$; uncritical!

However: don't use the 'free space' for other purposes!

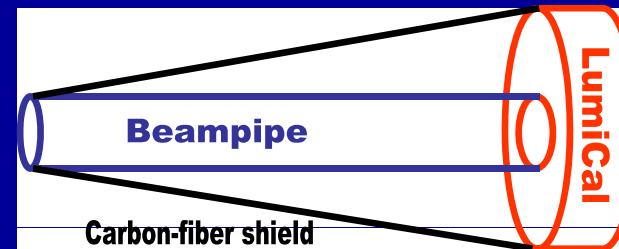


Possible solution

A dedicated silicon lab is created in Tel Aviv:

- Computer monitored prob station
- Computer supported $I(V)$, $C(V)$ measurements

in preparation:

- clean room
- spectroscopic set-up

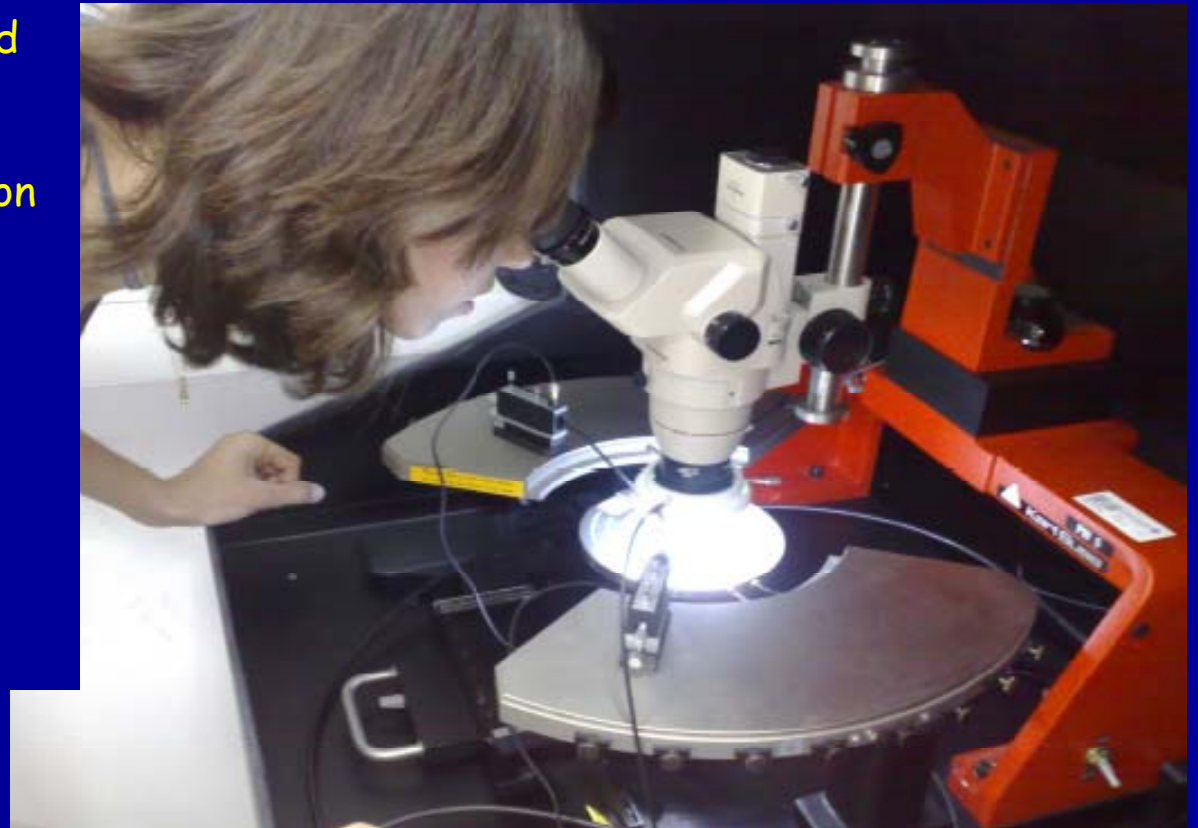

A dedicated HEP lab building is designed for detector R&D, planned to be ready mid 2009

Integration

