
Electron Reconstruction in the Beam Calorimeter

Aura Rosca, DESY

LCSW2011


Granada, September 26 – 30, 2011

Overview



- The very forward region of an ILC detector.
- Beam Cal reconstruction algorithm – a short reminder.
- Background subtraction procedure implemented in Marlin.
- Marlin processor for the Beam Cal reconstruction.
- First results.

Very Forward Region

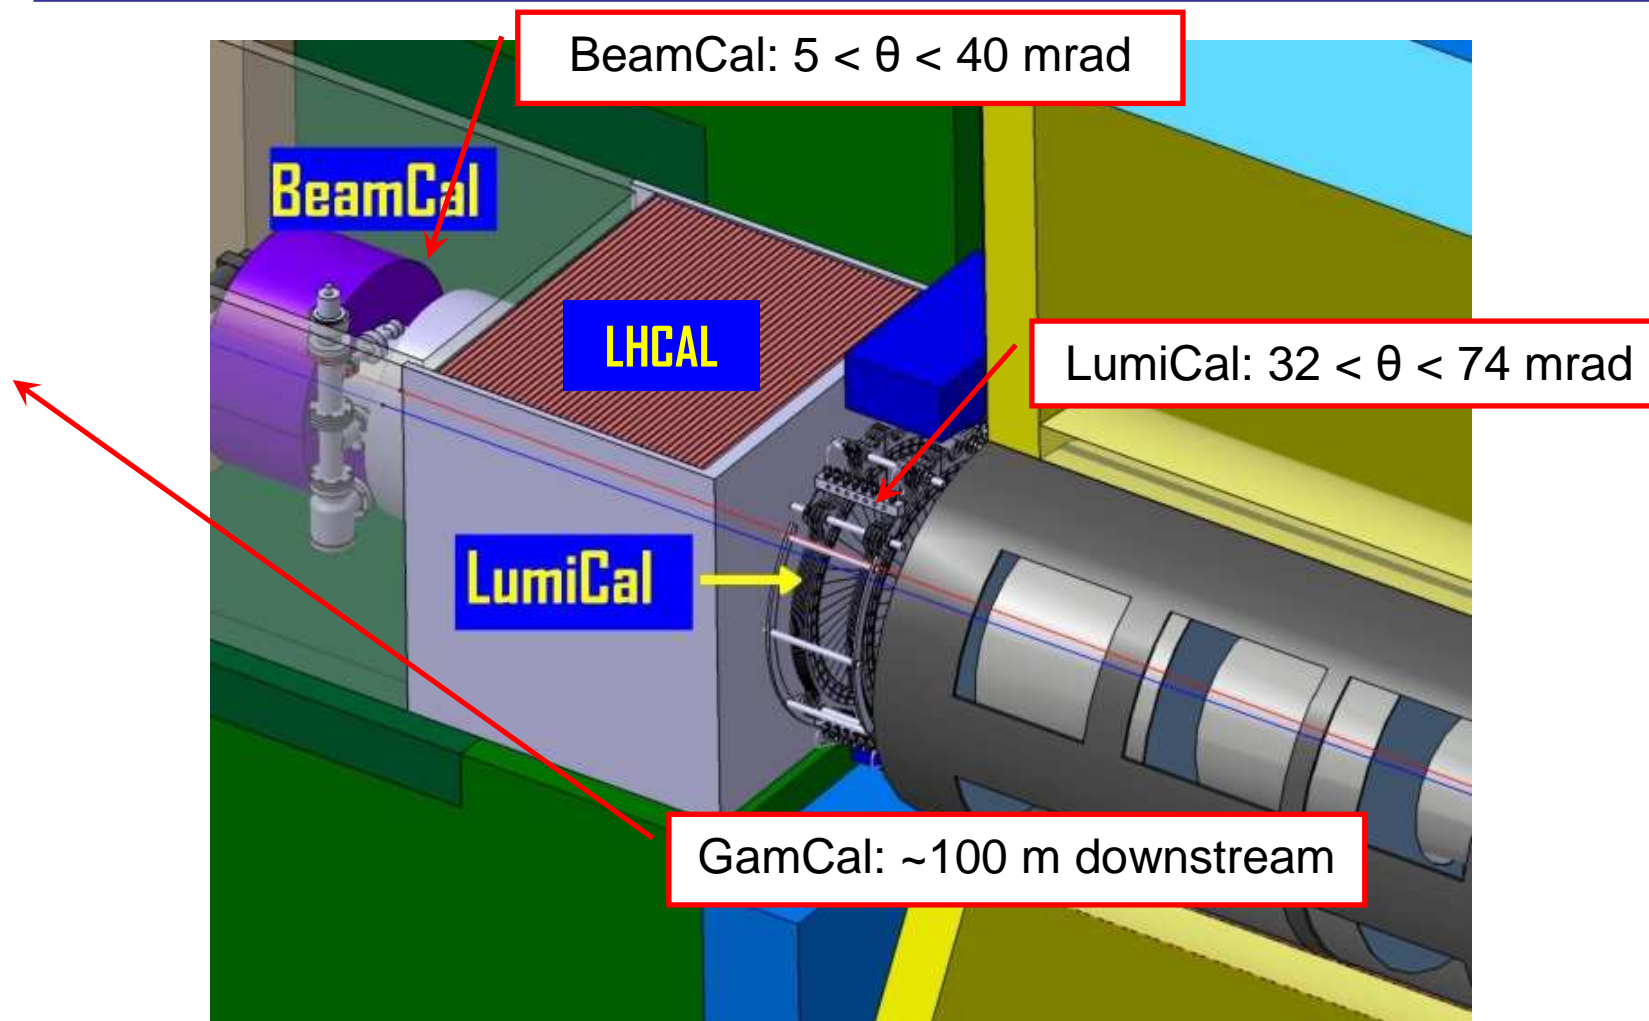

Very Forward Calorimeters



- LumiCal:
 - Accurate measurement of the luminosity by using Bhabha events (very high mechanical precision needed).
 - Extend coverage of the ILC detector.

- Gamcal
 - Beam diagnostics from beamstrahlung photons.

- BeamCal:
 - Shielding of inner detector.
 - Beam diagnostics from beamstrahlung electrons/positron pairs.
 - Detection of electrons/photons at low angle.

Beam Cal: W-Diamond Sandwich




Length = 30 layers each with a thickness of $1 X_0$


(3.5mm W + 0.5mm diamond sensor)

$\sim 2 \text{ cm} < R < \sim 15 \text{ cm}$

\sim sensor segmentation $\sim 8 \times 8 \text{ mm}^2$

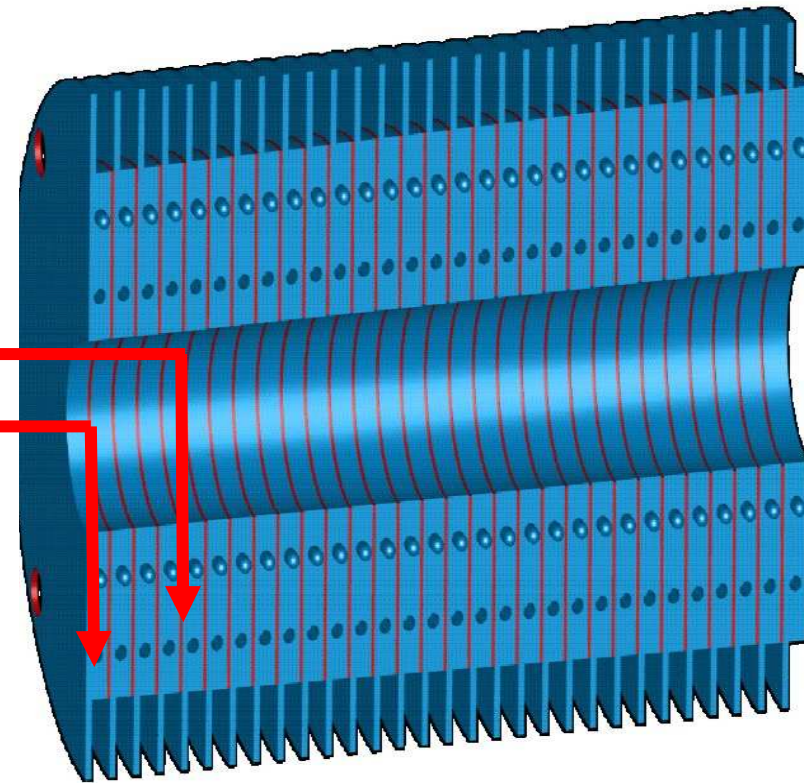


Electron Reconstruction in Beam Cal

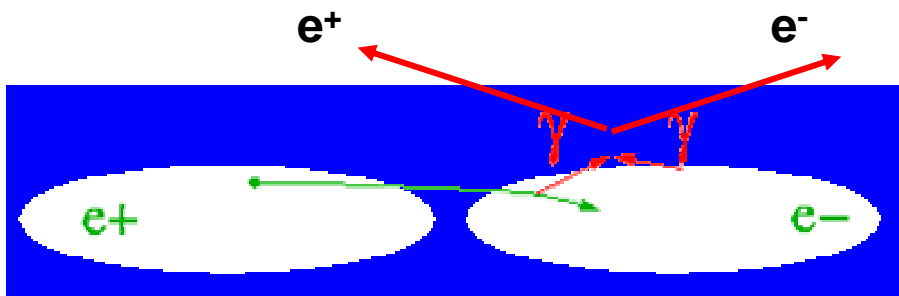

e^+e^- pairs from Beamstrahlung are deflected into the Beam Cal

High energy electrons are detected on top of the spread background from the Beamstrahlung pairs:

- Background subtraction
- Shower search

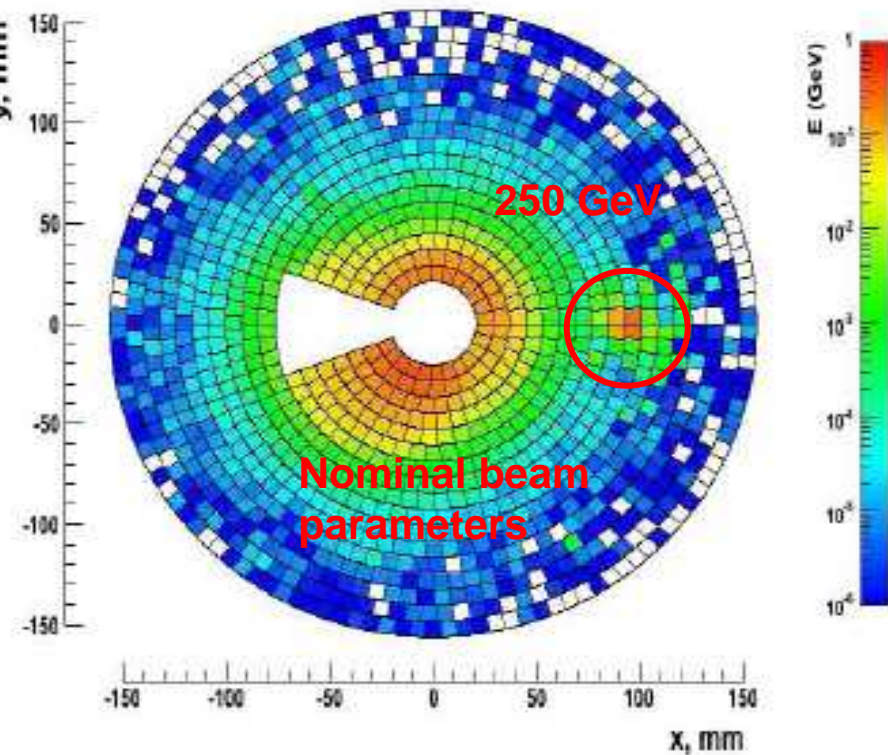





Background Subtraction

Background fluctuates from one BX to the other.

1877 BX






- Calculate average and rms of the background energy deposition on each detector pad and produce a map of the background depositions;
- Subtract the value of the average background energy from the total deposition on each pad;
- Equivalent with adding background fluctuations to the signal energy deposition.

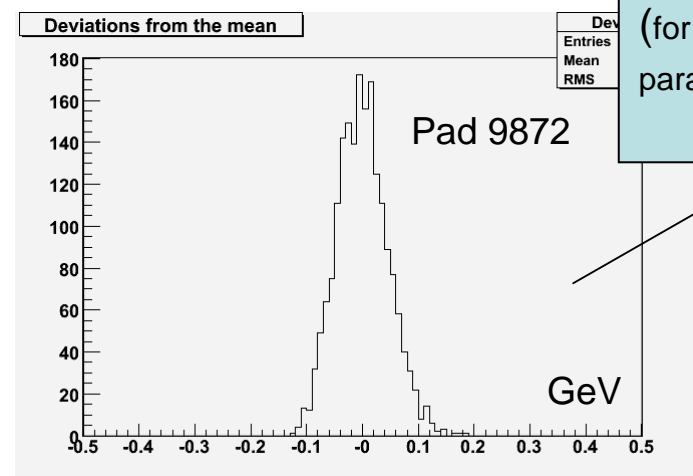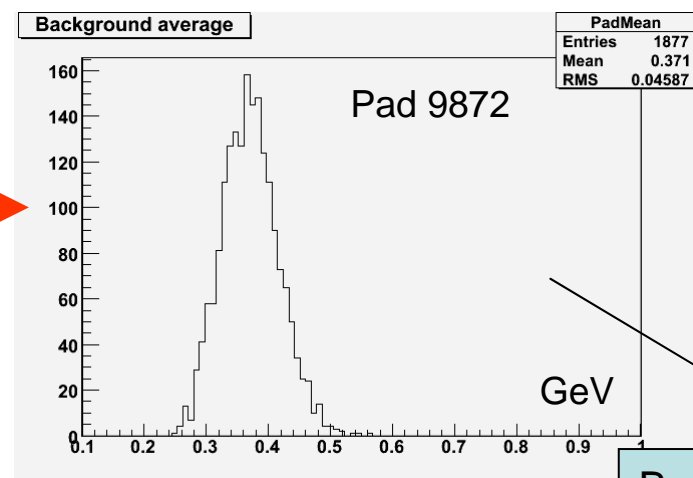


Background Map
(for nominal beam parameters)

Background Subtraction, cont.

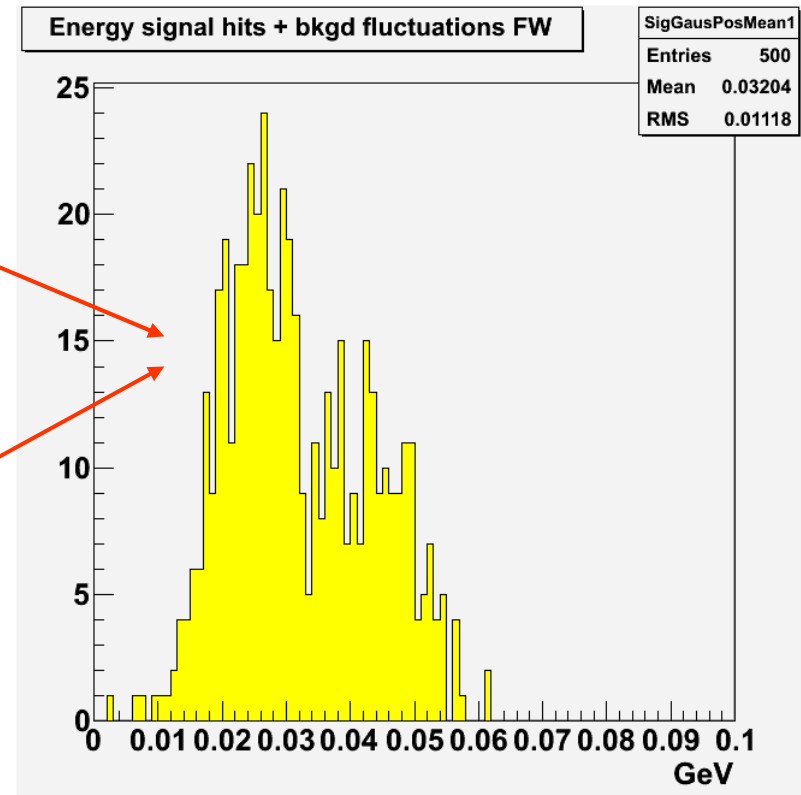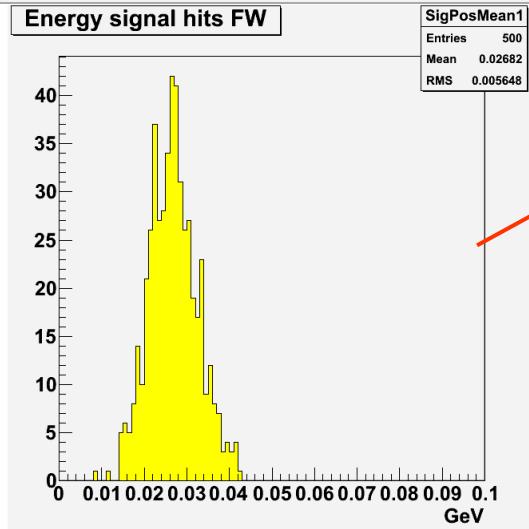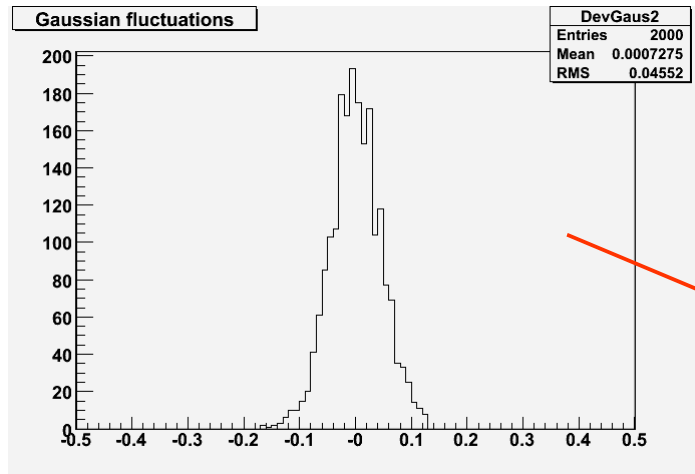


Shower Search

- Start from 5-th to 30th layer.
- Identify chains of 10 consecutive fired pads; energy deposition in each pad should be higher than 1 SD of the background.
- Find the tower with the maximum deposited energy;
- Add all neighbor towers adjacent to the tower with the highest energy;
- If such a neighbor tower has an energy larger than 90% of the energy of the central tower, add this tower neighbors as well;

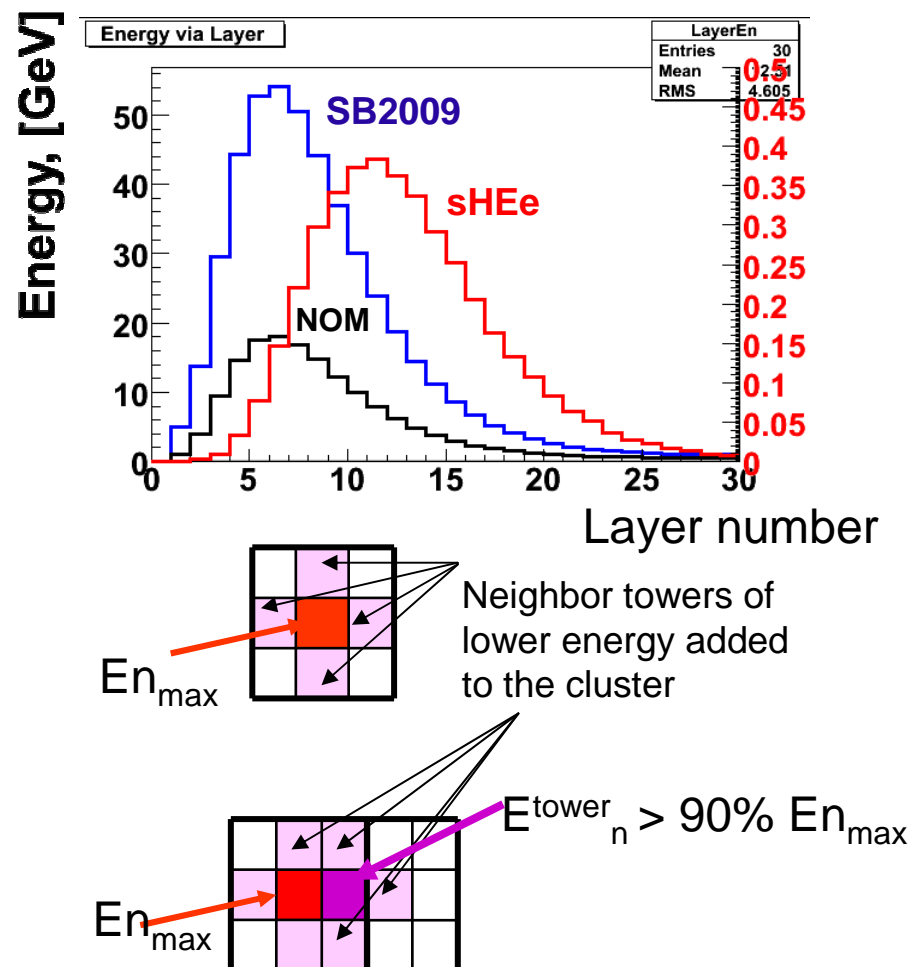

Implementation into Marlin

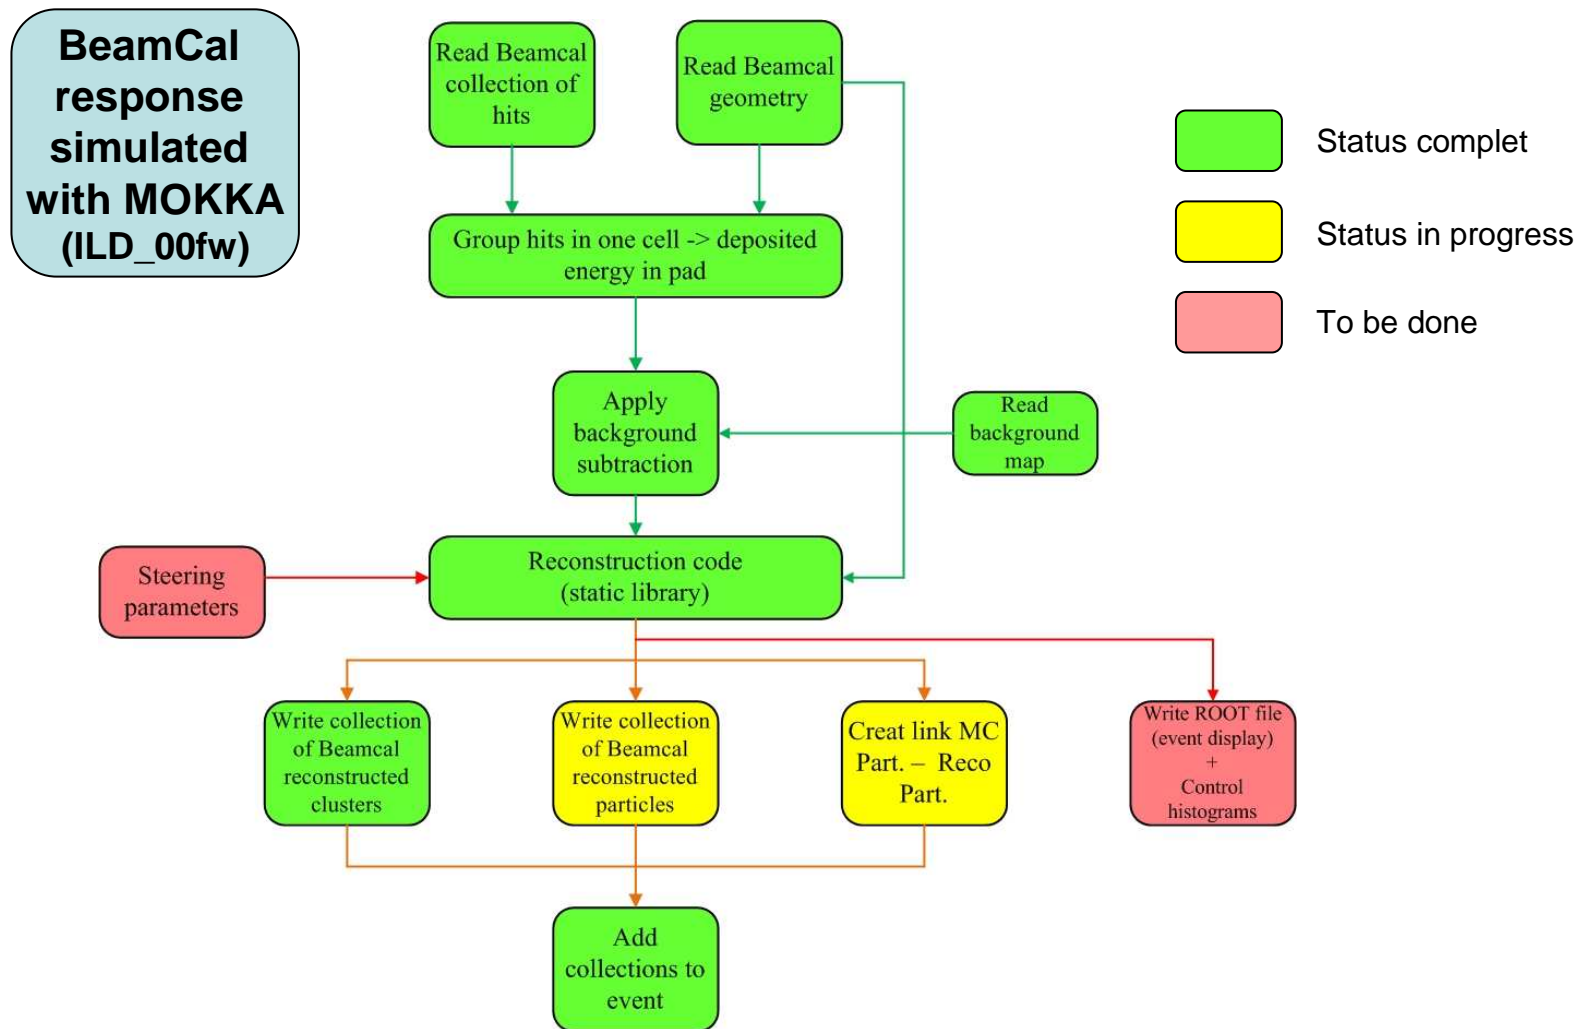



New Marlin Processor

- New Marlin processor, **BCalReco**, to perform the following tasks:
 - reads the Beam Cal collection of hits and puts the information into a 3D dynamic array of structures, `CellType ***info_detector`:
 - `typedef struct {`
 - `double sRin,sRout,sZstart,sZend,sSphi,sDphi,sEdepNeg,sEdepPos;`
 - `int sPos[3];`
 - `} CellType;`
 - calls the reconstruction code, `BCalReconstruction`:
 - `bcal_reco = new BCalReconstruction();`
 - `bcal_electron = bcal_reco->GetReconstrCoordinates(nLayers,nRings,nbPhis,cells);`
 - outputs the relevant collections (clusters, reconstructed particles)
 - Included in MarlinReco as part of ilcsoft v01-12
-

Redesign of Reconstruction Code





- No essential changes to the old shower search algorithm.
- Re-organize the code as a class, **BCalReconstruction**:
 - Destructor: `~BCalReconstruction()`
 - Functions:
 - RecCorr `GetReconstrCoordinates` (int `number_layers`, int `number_rings`, int `number_pads[]`, CellType `***info_detector`);
 - `typedef struct {`
 - `int side; // 0,1,-1 -> no, FW, BW reconstruction`
 - `double RecEne, ErrEne, CoordX, CoordY, CoordZ, RecRad, RecPhi;`
 - `} RecCorr;`
 - Protected member functions:
 - vector `SearchTowers` (int `the_Chains[maxrings][maxphis][maxlayers]`);
 - RecCorr `SearchClustersFW` (CellType `***info_detector`), RecCorr `SearchClustersBW`() ;
 - double `GetEnergyCalib` (double `energy`);
 - double `GetCoordRotX` (int `ring`, int `pad`, float `IP`, float `angle`), double `GetCoordRotZ`() ;
 - double `GetCoordY` (int `ring`, int `pad`);
 - void `Free2DArray` (int `**p2DArray`), void `Free3DArray` (CellType `***p3DArray`);





Beam Cal Performance

Single electrons generated with energies between 50 and 250 GeV, using the Particle Gun implemented in Mokka

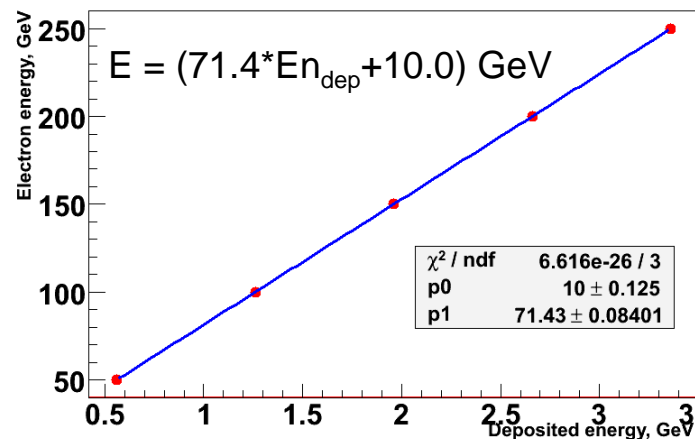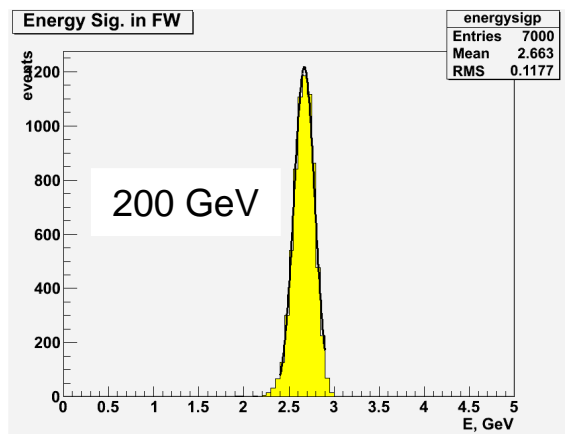

Calibration curve

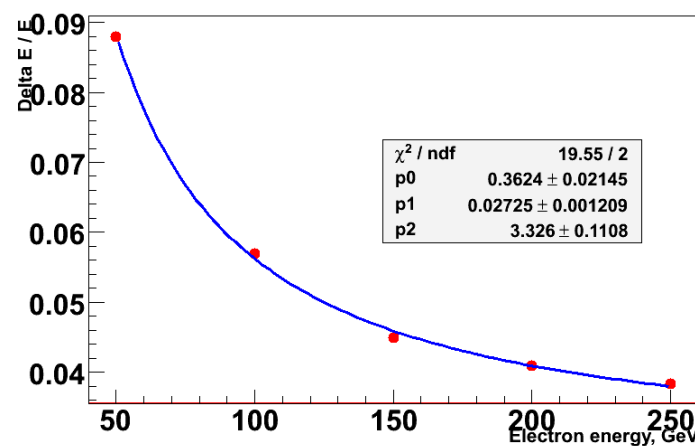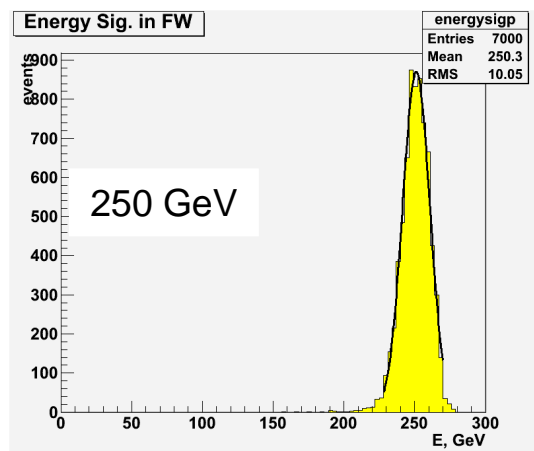


Energy resolution

$$\frac{\sigma}{E} = \frac{36\%}{\sqrt{E}}$$

Reconstruction efficiency




Not yet an update

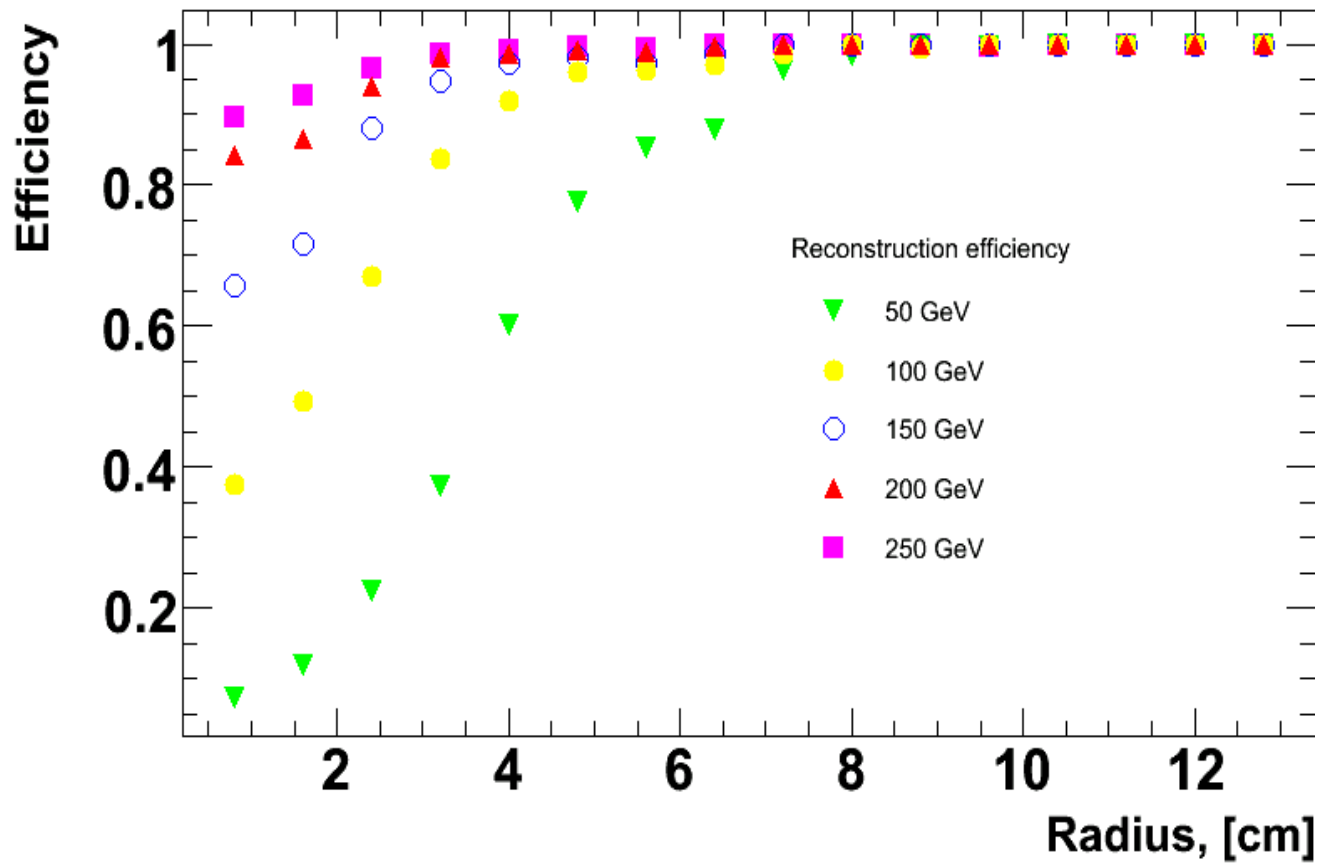


Bhabha Electrons in Beam Cal




Bhabha electrons generated with BHWIDE in the polar angle range between 20 and 150 mrad.

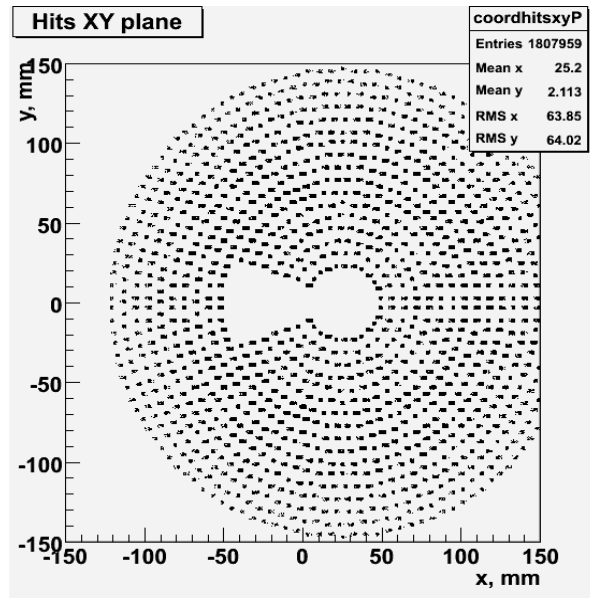

X-Y Coordinates of hits

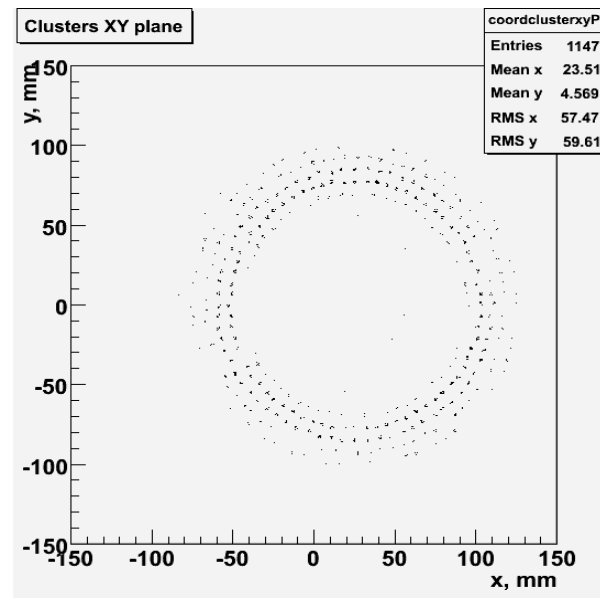

X-Y Coordinates of clusters

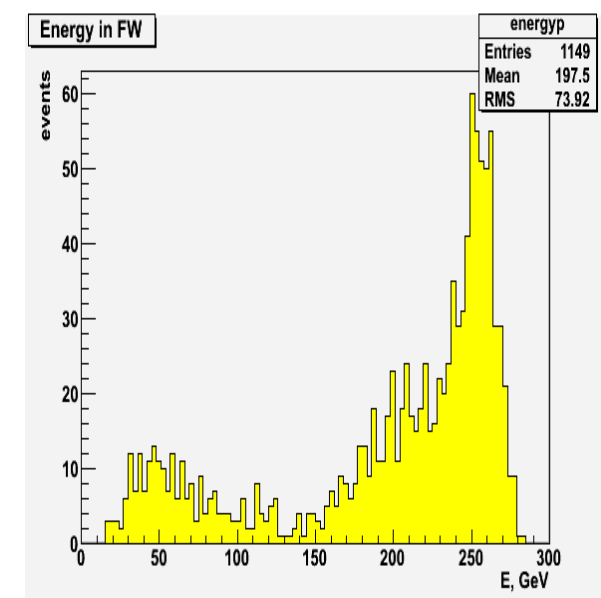

Electron energy

Summary



- The first release of BCalReconstruction and its associated Marlin processor, BCalReco, is now available in ilcsoft v1-12.
- We reproduced some of the results obtained with the standalone code, for instance the linearity of Beam Cal response and the energy resolution.
- Immediate plans now regard studying the reconstruction efficiency with different beam parameters, magnetic field configurations and sensor segmentations.